



Delta Door Drives and Motors

VFDDD



Delta Electronics, Inc.

Taoyuan1 31-1, Xingbang Road, Guishan Industrial Zone, Taoyuan County 33370, Taiwan, R.O.C. TEL: 886-3-362-6301 / FAX: 886-3-362-7267

Delta Electronics (Jiang Su) Ltd.

Detta Lectronics (Jiang Su) Lto. Wujiang Planta 1688 Jiangxing East Road, Wujiang Conomic Development Zone, Wujiang City, Jiang Su Province, People's Republic of China (Post code: 215200) TEL: 86-512-6340-3008 / FAX: 86-512-6340-7290

Delta Greentech (China) Co., Ltd. 238 Min-Xia Road, Cao-Lu Industry People's Republic of China Post code : 201209 TEL 021-58635678 ...021-5863 .021-58630003

Delta Electronics (Udpan), Inc. Tokyo Office Delta "oddaimon Building, 2-1-14 Sh. udaimon, Minato-Ku, Tokyo, 105-0012, udan TEL: 81-3-5733-1111 / FAX: 81-3-5733-1211

Delta Electronics (Korsa), Inc. 234-9, Duck Soo Building 7F, Nonhyun-Don Kangnam-Gu, Seoul, Korea 135-010 TEL: 82-2-515-5305 / FAX: 82-2-515-5302

4 Kaki Bukit Ave 1, # 05 – 05, Singapore 417939 TEL: 65-6747-5155 / FAX: 65-6744-9228

 Dolta Electronics (India) Pvt. Ltd.

 Plot No. 43, Sector – 35, HSIIDC,
 Gurgaon122001, Haryana, India

 TEL: 91-124-416-9040 / FAX: 91-124-403-6045

Americas

Rua Itapeva, N° 26, 3° andar, Bela vista ZIP: 01332-000 - São Paulo - SP - Brasil TEL : 55-11-3568-3875 / FAX : 55-11-3568-3865

Europe

De Witbogt 15, 5652 AG Eindhoven, The Netherlands TEL: 31-40-2592850 / FAX: 31-40-2592851



www.delta.com.tw/industrialautomation



Firmware Version 1.07

Thank you for choosing DELTA's high-performance VFD-D D Series. The VFD-DD Series is manufactured with high-quality components and materials and incorporate the latest microprocessor technology available.

This manual is to be used for the installation, parameter setting, troubleshooting, and daily maintenance of the AC motor drive. To guarantee safe operation of the equipment, read the following safety guidelines before connecting power to the AC motor drive. Keep this operating manual at hand and distribute to all users for reference.

To ensure the safety of operators and equipment, only qualified personnel familiar with AC motor drive are to do installation, start-up and maintenance. Always read this manual thoroughly before using VFD-M-D series AC Motor Drive, especially the WARNING, DANGER and CAUTION notes. Failure to comply may result in personal injury and equipment damage. If you have any questions, please contact your dealer.

PLEASE READ PRIOR TO INSTALLATION FOR SAFETY.



- ☑ AC input power must be disconnected before any wiring to the AC motor drive is made.
- ☑ A charge may still remain in the DC-link capacitors with hazardous voltages, when the power is turned off.
- ☑ There are highly sensitive CMOS IC components on the printed circuit boards. These components are especially sensitive to static electricity. To prevent damage to these components, do not touch these components or the circuit boards with metal objects or your bare hands.
- ☑ Ground the VFD-DD drive using the ground terminal. The grounding method must comply with the local standard of the country which the drive is installed.
- ☑ VFD-DD series can only be used for variable speed control of 3-phase induction motors, it should NOT be applied to 1-phase motors or other purpose.
- ☑ VFD-DD series is a specific drive for elevator door and other automatic door control. It should not be installed in a location that may cause personal injury.
- ☑ To prevent personal injury, please keep children and unqualified people away from the equipments.

WARNING	 Do NOT connect AC main power directly to the drive's output terminals U/T1, V/T2 and W/T3. DO NOT use Hi-pot test for internal components. The semi-conductor used in the AC motor drive is easily damaged by high-pressure. A charge may still remain in the main circuit terminals with hazardous voltages, even when motor has come to stop. Only the qualified technicians are allowed to install, wire and maintain AC motor drive. Be aware of the motor that it may rotates as soon as the RUN key is pressed using an external digital keypad, DO NOT stand next to the motor.
CAUTION	 ☑ DO NOT install the AC motor drive in a place subjected to high temperature, direct sunlight, high humidity, excessive vibration, corrosive gases or liquids, or airborne dust or metallic particles. ☑ Please regards the specification for AC motor drives installation. Failure to comply may result in fire, explosion or electric shock. ☑ When the motor cable between the AC motor drive and motor is too long, the layer insulation of the motor may be damaged. ☑ The rated voltage for the AC motor drive must be ≤ 240V and the mains supply current capacity must be ≤ 5000A RMS. ☑ If the AC motor drive is stored in no charge condition for more than 3 months, the ambient temperature should not be higher than 30 °C. Storage longer than one year is not recommended, it could result in the degradation of the electrolytic capacitors. ☑ Pay attention to the following when transporting and installing this package (including wooden crate, wood stave and carton box) 1. If you need to sterilize, deworm the wooden crate or carton box, please do not use steamed smoking sterilization or you will damage the VFD. 2. Please use other ways to sterilize or deworm. 3. You may use high temperature to sterilize or deworm. Leave the packaging materials in an environment of over 56°C for 30 minutes. 4. It is strictly forbidden to use steamed smoking sterilization. The warranty does not covered VFD damaged by steamed smoking sterilization.
	materials in an environment of over 56°C for 30 minutes. 4. It is strictly forbidden to use steamed smoking sterilization. The warranty

- Some of the graphics shown in this manual are the inner part of the drive after the cover is removed, when VFD-DD is in operation status, please make sure the cover and wiring are in the specified space as the manual indicates for personal safety.
- The drive customers received may be slightly different than the figures shown in the manual, this condition is normal and will cause no influences to the customer rights.
- Delta is always improving our products for greater efficiency; the content of this document may be modified or changed

without prior notice. Please contact your local distributors or visit our website to download the most updated version at http://www.delta.com.tw/industrialautomation/.

The AC motor drive may also be called as "drive", all drive mentioned in this manual refers to the AC motor drive.

Table of Content

Chapter 1 Introduction

	1-1 Receiving and Inspection	1 - 2
	1-2 Preparation for Installation and Wiring	1 - 4
	1-3 Dimensions	1 - 6
Chap	pter 2 Wiring	
	2-1 Wiring Diagram	2 - 2
	2-2 Main Circuit Terminal	2 - 6
	2-3 Control Circuit Terminal	2 - 8
Chap	oter 3 Keypad and Start-up	
	3-1 Operation Method	3 - 2
	3-2 Keypad Descriptions	3 - 3
Chap	oter 4 Parameter Settings	
	4-1 Summary of Parameter Settings	4 - 2
	Group 00: System Parameters	4 - 2
	Group 01: Motor Parameters	4 - 4
	Group 02 : Input/Output Parameters	4 - 6
	Group 03: Feedback Parameters	4 - 8
	Group 04: Door Open Parameters	4 - 9
	Group 05: Door Close Parameter4	-10
	Group 06: Protection and Special Parameters4	-12
	Group 07: Control Parameters4	-15
	Group 08: Multi-step Speed Parameters 4	-16
	Group 09: Communication Parameters 4	-17
	Group 10:User-defined Parameters 4	-18
	Group 11:View User-defined Parameters4	-20
	4-2 Summary of Detailed Parameter Settings4	-21
	Group 00: System Parameters4	-21
	Group 01: Motor Parameters4	-27
	Group 02 : Input/Output Parameters4	-34
	Group 03: Feedback Parameters4	-39

Group 04: Door Open Parameters	4-42
Group 05: Door Close Parameter	4 -46
Group 06: Protection and Special Parameters	4 -51
Group 07: Control Parameters	4 -57
Group 08: Multi-step Speed Parameters	
Group 09: Communication Parameters	4 -61
Group 10: User-defined Parameters	4 -71
Group 11: View User-defined Parameters	
Chapter 5 Troubleshooting	
5-1 Over Current (OC)	5 - 2
5-2 Ground Fault (GFF)	5 - 3
5-3 Over Voltage (OV)	5 - 4
5-4 Low Voltage (Lv)	5 - 5
5-5 Over Heat (OH1)	5 - 6
5-6 Overload (OL)	5 - 7
5-7 Digital Display is Abnormal	5 - 8
5-8 Phase Loss (PHL)	5 - 9
5-9 Motor is not Running	5-10
5-10 Fail to Adjust Motor Speed	5-11
5-11 Motor Stalls During Acceleration	5-12
5-12 Motor Run Error	5-13
5-13 Electromagnetic/Induction Noise	5-14
5-14 Environmental Condition	5-15
5-15 Prevent Interference to other Devices	5-16
Chapter 6 Fault Codes and Descriptions	
6-1 Common Problems and Solutions	6 - 2
6-2 Maintenance and Inspectations	6 - 7
Appendix A Specifications	A -1
Appendix B How to Select AC Motor Drive	B -1
B-1 Capacity Formula	B-2
B-2 General Precautions	B-4
B-3 How to Choose a Suitable Motor	B-5

Chapter 1 Introduction

- 1-1 Receiving and Inspection
- 1-2 Preparation for Installation and Wiring
- 1-3 Dimensions

The AC motor drive should be kept in the shipping carton or crate before installation. In order to retain the warranty coverage, the AC motor drive should be stored properly when it is not to be used for an extended period of time. Storage conditions are:



☑ Store in a clean and dry location free from direct sunlight or corrosive fumes.

☑ Store within an ambient temperature range of -20 °C to +60 °C.

- ☑ Store within a relative humidity range of 0% to 90% and non-condensing environment.
- ☑ Store within an air pressure range of 86 kPA to 106kPA.
- ☑ DO NOT place on the ground directly. It should be stored properly. Moreover, if the surrounding environment is humid, you should put exsiccator in the package.
- ☑ DO NOT store in an area with rapid changes in temperature. It may cause condensation and frost.
- ☑ If the AC motor drive is stored for more than 3 months, the temperature should not be higher than 30 °C. Storage longer than one year is not recommended, it could result in the degradation of the electrolytic capacitors.
- ☑ When the AC motor drive is not used for longer time after installation on building sites or places with humidity and dust, it's best to move the AC motor drive to an environment as stated above.

1-1 Receiving and Inspection


This VFD-VL AC motor drive has gone through rigorous quality control tests at the factory before shipment. After receiving the AC motor drive, please check for the following:

- ☑ Check to make sure that the package includes an AC motor drive, the User Manual/Quick Start and CD.
- ☑ Inspect the unit to assure it was not damaged during shipment.
- ☑ Make sure that the part number indicated on the nameplate corresponds with the part number of your order.


If the nameplate information does not correspond with your purchase order or if there are any problems, please contact your local distributor.

Nameplate Information

Example for 0.2kW/0.25HP 230V 1-Phase AC motor drive

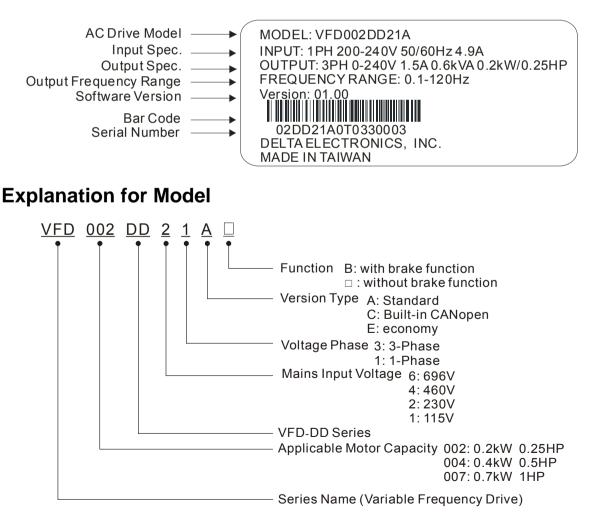

Explanation for Series Number

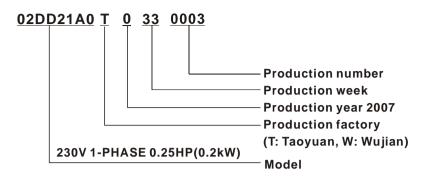


1-2 Preparation for Installation and Wiring

	Air Temperature:	-10 ~ +45°C (14 ~ 113°F)			
	Relative Humidity:	<90%, no condensation allowed			
Operation	Atmosphere pressure:	86 ~ 106 kPa			
Operation	Installation Site	<1000m			
	Altitude:	<1000m			
	Vibration:	<20Hz: 9.80 m/s ² (1G) max			
		20 ~ 50Hz: 5.88 m/s² (0.6G) max			
	Temperature:	-20°C ~ +60°C (-4°F ~ 140°F)			
Storage	Relative Humidity:	<90%, no condensation allowed			
Transportation	Atmosphere pressure:	86 ~ 106 kPa			
mansportation	Vibration:	<20Hz: 9.80 m/s² (1G) max			
		20 ~ 50Hz: 5.88 m/s² (0.6G) max			
Pollution Degree	2: can be used in a factory type environment.				

Install the AC motor drive in an environment with the following conditions:

Minimum Mounting Clearances

☑ The drive installation can be on a platform or on the wall. The left and middle figures show the drive installation on a platform from the front and the side-view. The right figure shows wall mounting. Both platform mounting and wall mounting are required to keep minimum mounting clearances for good ventilation.

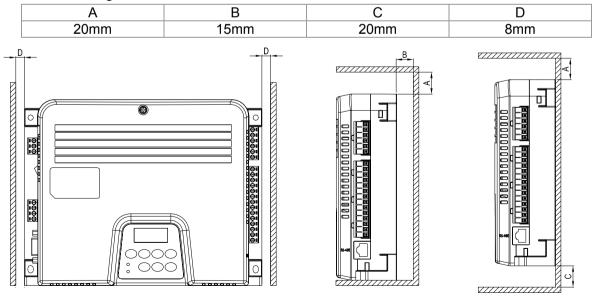




- 1. Mount the AC motor drive vertically on a flat vertical surface by using bolts or screws. Other directions are not allowed.
- 2. The AC motor drive will generate heat during operation. Allow sufficient space around the unit for heat dissipation. When the AC motor drive is installed in a confined space (e.g. cabinet), the surrounding temperature must be with good ventilation. DO NOT install the AC motor drive in a space with bad ventilation.
- 3. The heat sink temperature may rise to 90°C when running. The material on which the AC motor drive is mounted must be noncombustible and be able to withstand this high temperature.
- 4. When installing multiple AC motor drives in the same cabinet, they should be adjacent in a row with enough space in-between. When installing one AC motor drive below another one, use a metal separation barrier between the AC motor drives to prevent mutual heating.

Prevent fiber particles, scraps of paper, saw dust, metal particles, etc. from adhering to the heatsink. It is strongly recommend to mount the AC motor drive to inflammable materials such as metal for fire prevention.

1-3 Dimension

VFD002DD21A; VFD002DDD21AB; VFD002DD21C; VFD002DD21CB; VFD004DD21A; VFD004DD21AB; VFD004DD21C; VFD004DD21CB; VFD002DD21E; VFD004DD21E;

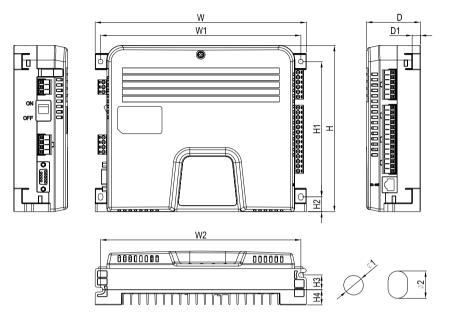


Unit: mm [inch]


W	W1	W2	Н	H1	H2	H3	H4	D	D1	Φ1	Ф2
215.0	204.0	204.0	170.0	138.5	15.0	15.1	15.5	55.0	8.5	5.0	7.0
[8.46]	[8.03]	[8.03]	[6.69]	[5.45]	[0.59]	[0.59]	[0.61]	[2.17]	[0.34]	[0.20]	[0.28]

Dimensions for Motor

ECMD-B9120GMS

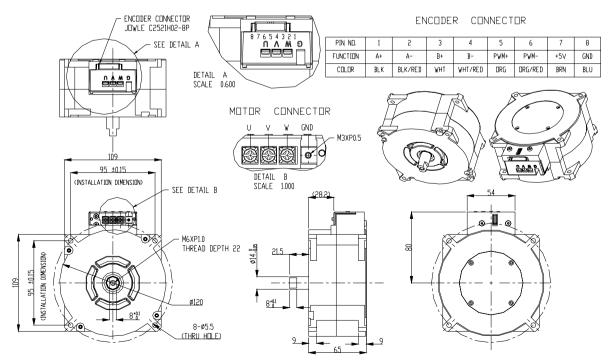

ECMD-B9160GMS

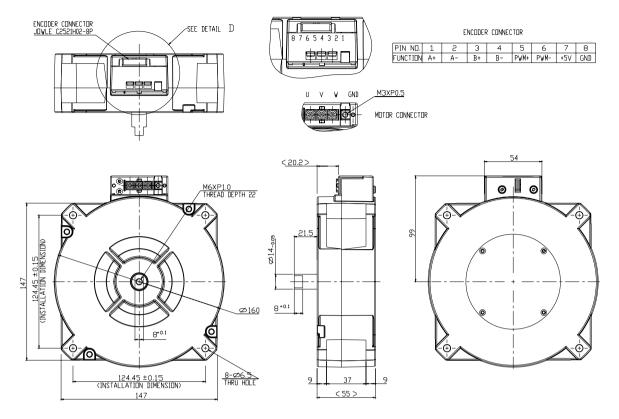

Chapter 2 Wiring

After removing the front cover, examine if the power and control terminals are clearly noted. Please read following precautions before wiring.


- ☑ Make sure that power is only applied to the R/L1, S/L2, T/L3 terminals. Failure to comply may result in damage to the equipments. The voltage and current should lie within the range as indicated on the nameplate (Chapter 1-1).
- ☑ All the units must be grounded directly to a common ground terminal to prevent lightning strike or electric shock.
- ☑ Please make sure to fasten the screw of the main circuit terminals to prevent sparks which is made by the loose screws due to vibration

DANGER	 It is crucial to turn off the AC motor drive power before any wiring installation is made. A charge may still remain in the DC bus capacitors with hazardous voltages even if the power has been turned off therefore it is suggested for users to measure the remaining voltage before wiring. For your personnel safety, please do not perform any wiring before the voltage drops to a safe level < 25 Vdc. Wiring installation with remaining voltage condition may cause sparks and short circuit. Only qualified personnel familiar with AC motor drives is allowed to perform installation, wiring and commissioning. Make sure the power is turned off before wiring to prevent electric shock.
CAUTION	 When wiring, please choose the wires with specification that complies with local regulation for your personnel safety. Check following items after finishing the wiring: Are all connections correct? No loose wires? No short-circuits between terminals or to ground?


2-1 Wiring Diagram

When wiring for an AC motor drive, user needs to connect wires to two sections, main circuit and control circuit. Please properly connect wires to your AC motor drive according to the circuit diagram provide in the following pages


VFD-DD Basic Wiring Diagram

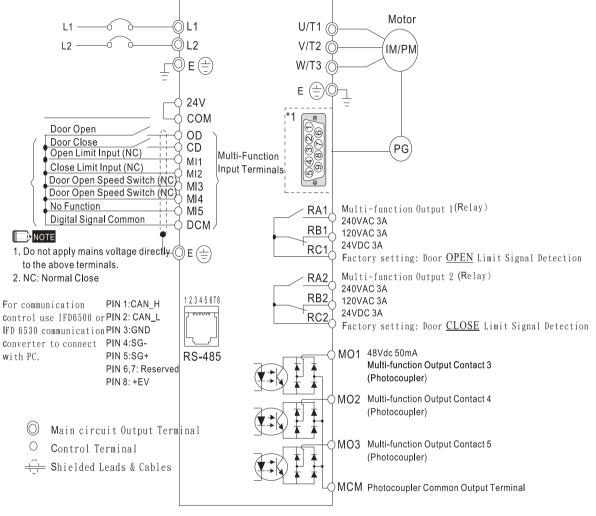

*1



Wiring/Terminals Setting

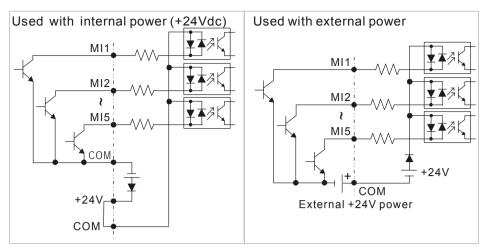


- ☑ The wiring of main circuit and control circuit should be separated to prevent erroneous actions.
- ☑ Please use shield wire for the control wiring and not to expose the peeled-off net in front of the terminal.
- ☑ Please use the shield wire or tube for the power wiring and ground the two ends of the shield wire or tube.
- ☑ Damaged insulation of wiring may cause personal injury or damage to circuits/equipment if it comes in contact with high voltage.
- ☑ The AC motor drive, motor and wiring may cause interference. To prevent the equipment damage, please take care of the erroneous actions of the surrounding sensors and the equipment.
- ☑ When the AC drive output terminals U/T1, V/T2, and W/T3 are connected to the motor terminals U/T1, V/T2, and W/T3, respectively. To permanently reverse the direction of motor rotation, switch over any of the two motor leads.
- ☑ With long motor cables, high capacitive switching current peaks can cause over-current, high leakage current or lower current readout accuracy. For usage of long motor cables use an AC output reactor.
- ☑ The AC motor drive, electric welding machine and the greater horsepower motor should be grounded separately.
- \square Use ground leads that comply with local regulations and keep them as short as possible.
- ☑ No braking resistor is built in the VFD-DD series, it can install braking resistor for those occasions that use higher load inertia or frequent start/stop. Refer to Appendix B for details.
- ☑ Multiple VFD-DD units can be installed in one location. All the units should be grounded directly to a common ground terminal, as shown in the figure below. Ensure there are no ground loops.




- ☑ The wiring of main circuit and control circuit should be separated to prevent erroneous actions.
- ☑ Please use shield wire for the control wiring and not to expose the peeled-off net in front of the terminal.
- ☑ Please use the shield wire or tube for the power wiring and ground the two ends of the shield wire or tube.

- ☑ Damaged insulation of wiring may cause personal injury or damage to circuits/equipment if it comes in contact with high voltage.
- ☑ The AC motor drive, motor and wiring may cause interference. To prevent the equipment damage, please take care of the erroneous actions of the surrounding sensors and the equipment.
- ☑ The AC drive output terminals U/T1, V/T2, and W/T3 should connect to the motor terminals U/T1, V/T2, and W/T3 respectively. To reverse the direction of motor rotation, please switch over any of the two motor leads.
- ☑ With long motor cables, high capacitive switching current peaks can cause over-current, high leakage current or lower current readout accuracy. For longer motor cables use an AC output reactor.
- ☑ The AC motor drive, electric welding machine and the greater horsepower motor should be grounded separately.
- ☑ Use ground leads that comply with local regulations and keep them as short as possible.
- ☑ Use ground leads that comply with local regulations and keep them as short as possible.
- Multiple AC drives can be installed in one location. All the units should be grounded directly to a common ground terminal, as shown in the figure below.
 Ensure there are no ground loops.

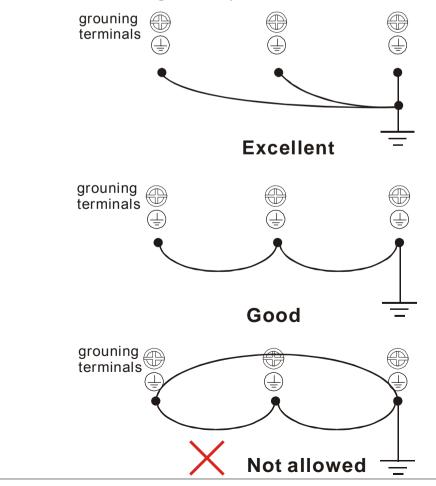

2-2 Main Circuit Terminal

Main Circuit Terminal

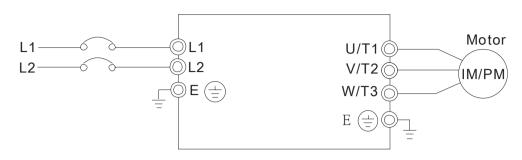

Wire Gauge	Torque	Wire Type	
14-12 AWG. (2.075-3.332mm	2) 5.2kgf-cm (4.5in-lbf)	Stranded copper only , $75^\circ C$	
Terminal Symbol	Explanation of Terminal Functions		
L1, L2	AC line input terminals		
U/T1, V/T2, W/T3	AC drive output terminals for con	necting 3-phase induction motor	
E Earth connection, please comply		with local regulations.	



Mains power terminals :

 \square Power can be connected to either L1 or L2.

- ☑ Please make sure to fasten the screw of the main circuit terminals to prevent sparks which is made by the loose screws due to vibration
- Please use voltage and current within the regulation shown in Appendix A.
- ☑ For the AC motor drive built-in with a general type of GFCI (Ground Fault Circuit Interrupter), it is suggested to select a current sensor with sensitivity of 200mA, and not less than 0.1-second detection time to avoid nuisance tripping. When selecting a GFCI that is specially designed for an AC motor drive, please select tje current sensor with sensitivity of 30mA or above.
- ☑ Please use the shield wire or tube for the power wiring and ground the two ends of the shield wire or tube.

Do NOT run/stop AC motor drives by turning the power ON/OFF. You should use control circuit terminal OD, CD or the OD on the keypad (or CD) and STOP key to control running or stopping of the motor drive. If you still need to run/stop AC drives by turning power ON/OFF, it is recommended to do so only ONCE per hour.

Output terminals for main circuit :

☑ When it needs to install the filter at the output side of terminals U/T1, V/T2, W/T3 on the AC motor drive. Please use inductance filter. Do not use phase-compensation capacitors or L-C (Inductance-Capacitance) or R-C

(Resistance-Capacitance), unless approved by Delta.
$\ensuremath{\boxtimes}$ DO NOT connect phase-compensation capacitors or surge absorbers at the
output terminals of AC motor drives.
☑ Use a well-insulated motor, suitable for inverter operation.

2-3 Control Circuit Terminal

	DCM COM 24V OD CD MI5 MI4 MI3	MI2 MI1 MCM M03 M02 M01 RC2 RA2 RB2 RC1 RA1 RB1
	Torque	Wire Gauge
	5 kgf-com (6.9 in-lbf)	18-12 AWG (0.8107-3.332mm ²)
Terminal Symbol	Terminal Function	Factory Setting (NPN Mode)
OD	Door Open to Stop	OD-DCM: ON: Open ; OFF: Decelerate to stop
CD	Door Close to Stop	CD-DCM: ON: Close; OFF: Decelerate to stop
MI1	Multi-function Input 1	Refer to Pr. 02-01~02-05 for programming of
MI2	Multi-function Input 2	Multi-function Inputs 1~5.
MI3	Multi-function Input 3	ON: the input voltage is 24Vdc(Max: 30Vdc), input
MI4	Multi-function Input 4	impedance is $3.75k\Omega$
MI5	Multi-function Input 5	OFF: leakage current tolerance is 10µA.
COM	Digital control signal common	Common for digital inputs
+E24V	Digital Signal Common	+24V 80mA
DCM	Digital Signal Common	Common for digital inputs
RA1	Multi-function Relay1 output (N.O.) a	Resistive Load: 5A(N.O.)/3A(N.C.) 240VAC
RB1	Multi-function Relay1 output (N.C.) b	5A(N.O.)/3A(N.C.) 24VDC
RC1	Multi-function Relay1	Inductive Load: 1.5A(N.O.)/0.5A(N.C.) 240VAC
RA2	Multi-function Relay2 output (N.O.) a	1.5A(N.O.)/0.5A(N.C.) 24VDC
RB2	Multi-function Relay2 common	To output any monitoring signal including in operation , frequency attained, overload indicatoretc, please refer
RC2	Multi-function Output 1 (Photocoupler)	to Pr.02-08~02-12 for MO selection.
MO1	Multi-function Output 1 (Photocoupler)	To output any monitoring signal including in operation , frequency attained, overload indicatoretc, please refer to Pr.03-01for MO selection.
MO2	Multi-function Output 2 (Photocoupler)	MO1~MO2-DCM Mo1~MO2-DCM MO1~MO2
MO3	Multi-function Output 3 (Photocoupler)	
MCM	Multi-function output common	Max 48Vdc 50mA

 * Analog control signal wiring size: 18 AWG (0.75 $\text{mm}^2)$ with shielded wire.

Digital Inputs (CD, OD, MI1~MI5, COM)

☑ When using contacts or switches to control the digital inputs, please use high quality components to avoid contact bounce.

Digital Outputs (MO1, MO2, MO3, MCM)

- ☑ Make sure to connect the digital outputs to the right polarity, see wiring diagrams.
- ☑ When connecting a relay to the digital outputs, connect a surge absorber or fly-back diode across the coil and check the polarity.

Chapter 3 Keypad and Start-up


3-1 Operation Method

3-2 Keypad Descriptions

1		ke sure that the wiring is correct. In particular, check that the output terminals Γ1, V/T2, W/T3 are NOT connected to power and that the drive is well grounded.
CAUTION	☑ Ve	rify that no other equipment is connected to the AC motor
	☑ Do	NOT operate the AC motor drive with humid hands.
		rify that there are no short-circuits between terminals and from terminals to bund or mains power.
	or	eck if all connections are proper, there should be no loose terminals, connectors screws. ke sure that the front cover is well installed before applying power.
WARNING	imı tou	nen AC motor drive and motor are not function properly, stops operation mediately and follow malfunction diagnosis to verify the reason of fault. Do not ich U/T1, V/T2, W/T3 before the main power L1, L2 are turned off or electric ock may occur.


3-1 Operation Method

The factory setting of VFD-DD series AC motor drive's operation method is set to external terminal control. But it is just one of the operation methods. The operation method can be via communication, control terminals settings or optional digital keypad. Please choose a suitable method depending on application and operation rule.

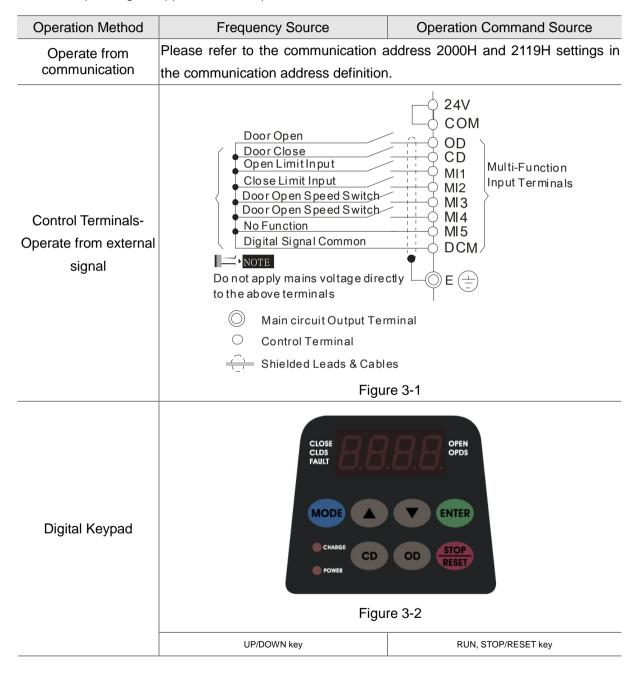

3-2 Keypad Descriptions


Descriptions of Digital Keypad Outlook

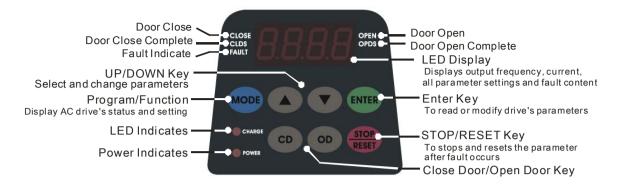

Descriptions of Display Items

Display Message	Descriptions
F5.00	Displays the AC drive Master Frequency.
H500	Displays the actual output frequency present at the motor.
U500	User defined unit (where U = F x Pr.0-04)
8 5.0	Displays the output current present at terminals U/T1, V/T2, and W/T3.
	Display counting value
00.50	Display the selected parameter
	Displays the actual stored value of the selected parameter.
73	External Fault.
End	Display "End" for approximately 1 second if input has been accepted and saved automatically.
Err	Display "Err", if the input is invalid.

How to Operate the Digital Keypad

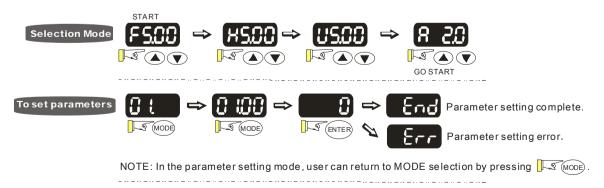

Chapter 4 Parameter Settings

- 4-1 Summary of Parameter Settings
- 4-2 Summary of Detailed Parameter Settings

The VFD-DD parameters are divided into 12 groups by property for easy setting. Most of the parameter settings can be done before start-up and readjustment of the parameter will not be needed.

Group 00: System Parameters

- Group 01: Motor Parameters
- Group 02: Input/Output Parameters
- Group 03: Feedback Parameters
- Group 04: Door Open Parameters
- Group 05: Door Close Parameters
- Group 06: Protection and Special Parameters
- Group 07: Control Parameters
- Group 08: Multi-step Speed Parameters
- Group 09: Communication Parameters
- Group 10:User-defined Parameters
- Group 11: View User-defined Parameters

4-1 Summary of Parameter Settings

00 System Parameters

 \mathcal{N} : This parameter can be set during operation.

Parameter	Explanation	Settings	Factory Setting		VFP	SVC	FOC	FOC
00.00	Identity Code of AC motor drive	0: 200w 2: 400w	Read only	0	0	0	0	0
00.01	Rated Current Display of AC motor drive	0: 1.50A 2: 2.50A	Read only	0	0	0	0	0
00.02	Parameter Reset	0: No function 1: Parameters locked 8: Keypad locked 10: All parameters are reset to factory setting (33.3Hz, 230V)	0	0	0	0	0	0
₩00.03	Start-up Display Selection	 Display the frequency command value (F) Display the actual output frequency (H) Display the content of user-defined unit (U) Display the output current (A) 	0	0	0	0	0	0
₩ 00.04	Content of Multi Function Display	 0: Display output current (A) 1: Display actual frequency (Hz) 2: Display DC-BUS voltage (U) 3: Display output voltage(E) 4: Display power factor angle (n.) 5: Display output power (kW) 6: Display motor angle speed (HU) 7: Display the drive's estimated output torque (kg-m) 8: Display PG pulse input position 9: Display the electrical angle 10: Display digital input ON/OFF status 12: Display digital output ON/OFF status 13: Display the corresponding CPU pin status of digital input 15: Display the corresponding CPU pin status of digital input 16:Actual output voltage when malfunction 17: Actual DC-BUS voltage when malfunction 18: Actual output frequency when malfunction 19: Actual output current when malfunction 20: Actual frequency command when malfunction 21: Door width in % or step speed 22: Door width(pulse) 23: Over modulation indication 	2	0	0	0	0	0

Parameter	Explanation	Settings	Factory Setting	٧F	VFP	SVC	FOC	FOC
00.05	Software version	Read only(Different versions will display differently)	#.##	0	0	0	0	0
₩ 00.06	Password Input	0~9999 0~2:times of wrong password	0	0	0	0	0	0
₩00.07	Password Set	0~9999 0: No password set or successful input in Pr.00-06 1: Password has been set	0	0	0	0	0	0
00.08	Control Method	0: V/f control 1: V/f Control + Encoder (VFPG) 2: Sensorless vector control (SVC) 3: FOC vector control + Encoder (FOCPG) 8: FOC PM control (FOCPM)	0	0	0	0	0	0
00.09	Door Control Mode	 Distance control mode Reserved Multi-step speed control mode Speed control mode 	3	0	0	0	0	0
00.10	Output Direction	0: Runs in same direction as setting 1: Runs in different direction than setting	0	0	0	0	0	0
⊮ 00.11	Carrier Frequency Selection	02~15 kHz 02~10kHz (for VFDXXXDDXXE model only)	10	0	0	0	0	0
₩ 00.12	Auto Voltage Regulation (AVR) Function	0: Enable AVR 1: Disable AVR 2: Disable AVR when deceleration stop	0	0	0	0	0	0
₩00.13	Source of the Master Frequency Command	0: by digital keypad input 1: by external terminal 2: by RS-485 serial communication	1	0	0	0	0	0
00.14	Demo Mode	0: Disable 1: Display demo action	0	0	0	0	0	0
⊮ 00.15	Frequency Testing Command	0~120.00 Hz	0	0	0	0	0	0

01 Motor Parameters

 \varkappa : This parameter can be set during operation.

Parameter	Explanation	Settings	Factory Setting	۲F	VFP	SVC	FOC	FOC
01.00		 No function Auto-tuning for PM motor parameters (brake locked) Auto-tuning for PG offset angle without load (Pr.01.09) Auto-tuning for PG offset angle with load (Pr.01.09) 						0
01.01	Full-load Current of motor (PM)	(20~120%)*00.01 Amps	1.00					0
01.02	Rated power of Motor (PM)	0.00~655.35kW	0.06					0
01.03	Rated speed of Motor (rpm) (PM)		250					0
01.04	Number of Motor Poles (PM)	2~96	16					0
01.05	Rs of Motor parameter (PM)	0.0~655.35Ω	13.900					0
01.06	Ld of Motor Parameter (PM)	0.0~6553.5mH	169.4					0
01.07	Lq of Motor Parameter (PM)	0.0~6553.5mH	169.4					0
01.08	Back Electromotive Force (PM)	0.0~6553.5Vrms	0.0					0
01.09	Angle between Magnetic Pole and PG Origin (PM)	0.0~360.0°	360.0					0
01.10	Magnetic Pole Re-orientation (PM)	0:No function 1:Reset magnetic pole position	0					0
01.11		0: No function 1: Rolling test 2: Static test 3: Reserved	0			0	0	
01.12	Full-load Current of Motor (IM)	(20~120%)*00.01 Amps	1.00	0	0	0	0	
01.13	Rated power of Motor (IM)	0.00~655.35kW	0.06			0	0	
01.14	Rated speed of Motor (rpm) (IM)	0~65535	250		0	0	0	
01.15	Number of Motor Poles (IM)	2~48	16	0	0	0	0	
01.16	No-load Current of Motor (IM)	00~ Pr.01.12 factory setting	#.##		0	0	0	
01.17	Rs of Motor (IM)	0.000~65.535Ω	0.000			0	0	
01.18	Rr of Motor (IM)	0.000~65.535Ω	0.000			0	0	
01.19	Lm of Motor (IM)	0.0~6553.5mH	0.0			0	0	
01.20	Lx of Motor (IM)	0.0~6553.5mH	0.0			0	0	
₩01.21	Torque Compensation Time Constant	0.001~10.000sec	0.020			0		

Parameter	Explanation	Settings	Factory Setting	٧F	VFP	SVC	FOC	FOC
₩01.22	Slip Compensation Time Constant	0.001~10.000sec	0.100			0		
₩01.23	Torque Compensation Gain	00~10	0	0	0			
₩01.24	Slip Compensation Gain	0.00~10.00	0.00	0	0	0		
₩01.25	Slip Deviation Level	00~1000% (0:Disable)	0		0	0	0	
⊮ 01.26	Detection Time of Slip Deviation	0.0~10.0sec	1.0		0	0	0	
₩ 01.27	Over Slip Treatment	0: Warn and keep operation 1: Warn and ramp to stop 2: Warn and coast to stop	0		0	0	0	
₩01.28	Hunting Gain	00~10000 (0:Disable)	2000	0	0	0		
01.29	Accumulative Motor Operation Time (Min.)	0~1439	0	0	0	0	0	
01.30	Accumulative Motor Operation Time (day)	0~65535	0	0	0	0	0	
01.31	Maximum Output Frequency	10.00~120.00Hz	50	0	0	0	0	0
01.32	Output Frequency 1 (Base frequency /Motor rated frequency)	0.00~120.00Hz	50	0	0	0	0	0
01.33	Output Voltage 1(Base voltage/Motor rated voltage)	0.0V~240.0V	220.0	0	0	0	0	0
01.34	Output Frequency 2	0.00~120.00Hz	0.50	0	0			
⊮ 01.35	Output Voltage 2	0.0V~240.0V	5.0	0	0			
01.36	Output Frequency 3	0.00~120.00Hz	0.50	0	0			
⊮ 01.37	Output Voltage 3	0.0V~240.0V	5.0	0	0			
01.38	Output Frequency 4	0.00~120.00Hz	0.00	0	0	0	0	
⊮ 01.39	Output Voltage 4	0.0V~240.0V	0.0	0	0			

02 Input/Output Parameters

\varkappa : This parameter can be set during operation.

Parameter	Explanation	Settings	Factory Setting		VFP	SVC	FOC	FOC
02.00	2-wire/3-wire Operation Control	 0: 2-wire mode 1 (when power is on, operation begins) 1: 2-wire mode 1 (when power is on, no operation) 2: 2-wire mode 2 (when power is on, operation begins) 3: 2-wire mode 2 (when power is on, no operation) 	0	0	0	0	0	0
02.01	Multi-Function Input 1 (MI1)		14	0	0	0	0	0
02.02	Multi-Function Input 2 (MI2)	1: Multi-step speed command 1	15	0	0	0	0	0
02.03		2: Multi-step speed command 2	16	0	0	0	0	0
02.04	Multi-Function Input 4 (MI4)	3: Multi-step speed command 3	17	0	0	0	0	0
02.05	Multi-Function Input 5 (MI5)	4: Multi-step speed command 4	0	0	0	0	0	0
		5: Fault reset		0	0	0	0	0
		6: Low speed operation		0	0	0	0	0
		7: OD/CD command for low speed operation		0	0	0	0	0
		8: 1st, 2nd acceleration/deceleration time selection		0	0	0	0	0
		9: Force stop (NO) input		0	0	0	0	0
		10: Demo mode	ļ	0	0	0	0	0
		11: Emergency stop (NO) input		0	0	0	0	0
		12: Source of operation command (Keypad/External terminals)		0	0	0	0	0
		13: Parameter lock enable (NC)		0	0	0	0	0
		14: Door open complete signal		0	0	0	0	0
		15: Door close complete signal		0	0	0	0	0
		16: Door open speed switch signal		0	0	0	0	0
		17: Door close speed switch signal		0	0	0	0	0
		18: Open allowance signal		0	0	0	0	0
		19: Screen signal input		0	0	0	0	0
		20: Door curve signal input for 2nd set door open/close		0	0	0	0	0
		21: Reset signal input		0	0	0	0	0
		22: Input system security circuit confirmation signal (DCC)		0	0	0	0	0
		23: Input enforced door closing signal (NUD)		0	0	0	0	0
⊮ 02.06	Digital Terminal Input Debouncing Time	0.001~30.000sec	0.005	0	0	0	0	0
₩02.07	Digital Input Operation Direction	0~65535	60	0	0	0	0	0
₩ 02.08	Multi-function Output (Relay1)	0: No function	16	0	0	0	0	0

Parameter	Explanation	Settings	Factory Setting		VFP	SVC	FOC	FOC
₩02.09	Multi-function Output (Relay2)	1: AC drive in operation	17	0	0	0	0	0
₩02.10	Multi-function Output (MO1)	2: Zero speed frequency signal (including STOP)	0	0	0	0	0	0
₩02.11	Multi-function Output (MO2)	3: AC drive ready	0	0	0	0	0	0
₩02.12	Multi-function Output (MO3) (Communication)	4: Low voltage warning(Lv)	0	0	0	0	0	0
		5: Fault indication		0	0	0	0	0
		6: Overhead warning (Pr.06.09)		0	0	0	0	0
		7: Detection of braking resistor action level		0	0	0	0	0
		8: Warning indication		0	0	0	0	0
		9: Over voltage warning		0	0	0	0	0
		10: OD command		0	0	0	0	0
		11: CD command		0	0	0	0	0
		12: Demo Indication		0	0	0	0	0
		13: Demo complete		0	0	0	0	0
		14: Emergency stop indication		0	0	0	0	0
		15: Force stop indication		0	0	0	0	0
		16: Door close complete (limit) signal output		0	0	0	0	0
		17: Door open complete (limit) signal output		0	0	0	0	0
		18: Door close error		0	0	0	0	0
		19: Position Complete Signal		0	0	0	0	0
		20: Position Detection 1(for door close only)		0	0	0	0	0
		21: Position Detection 2(for door close only)		0	0	0	0	0
		22: Position Detection 3(for door close only))		0	0	0	0	0
		23: Position Detection 1(for door open only)24: Position Detection 2(for door open		0	0	0	0	0
		only) 25: Position Detection 3(for door open		0	0			0
		only) 26: PG feedback error		0	0	0 0		0
		27: output signal when unable to open the door		0	0		0	
		28: over torque (OT1)		0	0	0	0	0
⊮ 02.13	Multi-function Output Direction	0~65535	0	0	0	0	0	0
⊮ 02.14	Position Detection Signal 1	0.0~100.0%	25.0	0	0	0	0	0
⊮ 02.15	Position Detection Signal 2		12.5	0	0	0	0	0
₩02.16	Position Detection Signal 3	0.0~100.0%	7.5	0	0	0	0	0

Chapter 4 Parameter Settings | DD Series

03 Feedback Parameters

✓ This parameter can be set during

onoration	
operation.	

Parameter	Explanation	Settings	Factory Setting		VFP	SVC	FOC	FOC
03.00	Encoder (PG) Signal Type	0: No function 1: ABZ 7: PWM pulse	7		0		0	0
03.01	Encoder pulse	1~25000	256		0		0	0
03.02		 Disable Phase A leads in a forward run command and phase B leads in a reverse run command Phase B leads in a forward run command and phase A leads in a reverse run command Phase A is a pulse input and phase B is a direction input. (low input=reverse direction, high input=forward direction) Phase A is a pulse input and phase B is a direction input. (low input=reverse direction, high input=forward direction) Phase A is a pulse input and phase B is a direction input. (low input=forward direction, high input=reverse direction) Single-phase input 			0		0	0
₩03.03	Encoder Feedback Fault Treatment (PGF1, PGF2)	0: Warn and keep operation 1: Warn and ramp to stop 2: Warn and stop operation	2		0		0	0
₩ 03.04	Detection Time for Encoder Feedback Fault		1.0		0		0	0
₩03.05	Encoder Stall Level (PGF3)	0~120% (0:Disable)	115		0	0	0	0
№ 03-06	Encoder Stall Detection Time	0.0~2.0sec	0.1		0	0	0	0
₩03.07	Encoder Slip Range (PGF4)	0~50% (0:Disable)	50		0	0	0	0
₩03.08	Encoder Slip Detection Time	0.0~10.0sec	0.5		0	0	0	0
₩03.09	Encoder Stall and Slip Error Treatment	0: Warn and keep operation 1: Warn and ramp to stop 2: Warn and coast to stop	2		0	0	0	
03.10	Door Width Auto-tuning Frequency	0.10~120.00Hz	5.0	0	0	0	0	0
03.11	Door Width Auto-tuning	0: Disable 1: Enable	0	0	0	0	0	0
03.12	Door Width Pulse (Unit:1)	1~9999	8800	0	0	0	0	0
03.13	Door Width Pulse (Unit:10000)	0~9999 (Unit:10000)	0	0	0	0	0	0

04 Door Open Parameters

✓ This parameter can be set during operation.

		1						
Parameter	Explanation	Settings	Factory Setting		VFP	SVC	FOC	FOC
₩04.00	Door Open by Initial Speed	0.00~120.0Hz	2.00	0	0	0	0	0
₩04.01	Door Open Distance by Initial Speed	0~65535 (Unit: pulses number)	300	0	0	0	0	0
₩04.02	Door Open Time by Initial Speed	0~20.0s	1.0	0	0	0	0	0
₩04.03	Door Open High Speed 1	0.00~120.0Hz	15.00	0	0	0	0	0
₩04.04	Door Open by Final Speed Begins	0.0~100.0% (Door width setting in %)	90.0	0	0	0	0	0
₩04.05	Door Open Final Speed	0.00~120.0Hz	5.00	0	0	0	0	0
₩04.06	Door Open by Holding Speed Begins	0.0~100.0% (Door width setting in %)	95.0	0	0	0	0	0
₩04.07	Door Open Holding Speed	0.00~120.0Hz	2.00	0	0	0	0	0
₩04.08	Door Open Acceleration Time 1	0.1~3600sec	1.0	0	0	0	0	0
₩04.09	Door Open Deceleration Time 1	0.1~3600sec	1.0	0	0	0	0	0
₩04.10	Door Open Holding Torque Level	0.0~150.0% (AC drive's rated current)	50.0	0	0	0	0	0
₩04.11	Door Open Holding Torque	0.0~100.0% (AC drive's rated current)	30.0	0	0	0	0	0
₩04.12	Response Time of Door Open Holding Torque	0.01~10.00sec	0.20	0	0	0	0	0
₩04.13	Door Open High Speed 2	0.00~400.0Hz	30.00	0	0	0	0	0
₩04.14	Door Open Acceleration Time 2	0.1~3600sec	1.0	0	0	0	0	0
⊮ 04.15	Door Open Deceleration Time 2	0.1~3600sec	1.0	0	0	0	0	0
⊮ 04.16	Door Open Holding Torque 2	0.0~150.0% (AC drive's rated current)	0.0	0	0	0	0	0
04.17	Door Open Time-out Setting	0.0~180.0sec (0.0 sec: Disable)	0.0	0	0	0	0	0
⊮ 04.18	Holding Time for OD (Open Door)Terminal	0.0~999.9sec (999.9 sec for always holding)	0.0	0	0	0	0	0
⊮ 04.19	Door Open Acceleration Time of S1 Curve	0.0~10.0sec	0.0	0	0	0	0	0
№ 04.20	Door Open Acceleration Time of S2 Curve	0.0~10.0sec	0.0	0	0	0	0	0
₩04.21	Door Open DC Brake Current Level	00~100%	0	0	0	0		
₩04.22	Door Open DC Brake Time when Startup	0.0~60.0sec	0.0	0	0	0	0	0
⊮ 04.23	Door Open DC Brake Time when Stopping	0.0~60.0sec	0.0	0	0	0	0	0
₩04.24	Door Open DC Brake Starting Frequency	0.00~120.00Hz	0.00	0	0	0	0	

Chapter 4 Parameter Settings | DD Series

Parameter	Explanation		Factory Setting		VFP	SVC	FOC	FOC
		0.0~150.0% (rated motor current) 0.0:No function	0	0	0	0	0	0

05 Door Close Parameters

			,					
Parameter	Explanation	Settings	Factory Setting		VFP	SVC	FOC	ЦОСН
₩05.00	Door Close Initial Speed	0.00~120.0Hz	2.00	0	0	0	0	0
₩05.01	Door Close Distance by Initial Speed	0~65535 (Unit: pulses number)	0	0	0	0	0	0
⊮ 05.02	Door Close Time by Initial Speed	0~20.0s	0	0	0	0	0	0
₩05.03	Door Close High Speed 1	0.00~120.0Hz	15.00	0	0	0	0	0
₩05.04	Door Close by Final Speed Begins	0.0~100.0% (Door width setting in %)	10.0	0	0	0	0	0
₩05.05	Door Close Final Speed	0.00~120.0Hz	5.00	0	0	0	0	0
₩05.06	Door Close by Holding Speed Begins	0.0~100.0% (Door width setting in %)	5.0	0	0	0	0	0
₩05.07	Door Close Holding Speed	0.00~120.0Hz	2.00	0	0	0	0	0
₩ 05.08	Door Close Acceleration Time 1	0.1~3600sec	1.0	0	0	0	0	0
₩ 05.09	Door Close Deceleration Time 1	0.1~3600sec	1.0	0	0	0	0	0
⊮ 05.10	Door Close Holding Torque Level 1	0.0~150.0% (Drive's rated current)	50.0	0	0	0	0	0
₩05.11	Door Close Holding Torque 1	0.0~100.0% (Drive's rated current)	20.0	0	0	0	0	0
⊮ 05.12	Response Time of Door Close Holding Torque	0.01~10.00sec	0.20	0	0	0	0	0
₩05.13	Door Close High Speed 2	0.00~120.0Hz	30.00	0	0	0		Γ
№ 05.14	Door Close Acceleration Time 2	0.1~3600sec	1.0	0	0	0	0	0
₩05.15	Door Close Deceleration Time 2	0.1~3600sec	1.0	0	0	0	0	0
₩05.16	Door Close Holding Torque Level 2	0.0~150.0% (Ac drive's rated current)	0.0	0	0	0	0	0
₩05.17	Door Close Time-out Setting	0.0~180.0sec (0.0sec:Disable)	0.0	0	0	0	0	С
⊮ 05.18	Holding Time for CD (Close Door)Terminal	0.0~999.9sec (999.9sec is always holding)	0.0	0	0	0	0	С
№ 05.19	Door Close Acceleration Time of S1 Curve	0.0~10.0sec	0.0	0	0	0	0	С
₩05.20	Door Close Acceleration Time of S2 Curve	0.0~10.0sec	0.0	0	0	0	0	С
₩05.21	Door Close DC Brake Current Level	0~100%	0	0	0	0		
₩05.22	Door Close DC Brake Time when Startup	0.0~60.0sec	0.0	0	0	0	0	C
₩05.23	Door Close DC Brake Time when Stopping	0.0~60.0sec	0.0	0	0	0	0	С

Parameter	Explanation	Settings	Factory Setting		VFP	SVC	FOC	FOC
₩05.24	Door Close DC Brake Starting Frequency	0.00~120.00Hz	0.00	0	0	0	0	
05.25	Door Re-open Current Level 1	0.0~150.0% (AC drive's rated current)	100.0	0	0	0	0	0
₩05.26	Door Re-open Current Level 1 for Acceleration Area	100~200% (100% is Pr.05.25 setting)	150	0	0	0	0	0
₩05.27	Door Re-open Current Level 1 for Low Speed Area	0.0~150.0%(Drive's rated current)	100.0	0	0	0	0	0
05.28	Door Re-open Current Level 2	0.0~150.0%(Drive's rated current)	100.0	0	0	0	0	0
₩05.29	Door Re-open Current Level 2 for Acceleration Area	0.0~150.0% (Drive's rated current)	150	0	0	0	0	0
≠05.30	Door Re-open Current Level 2 for Low Speed Area	100~200%(100% is Pr.05.29 setting)	100.0	0	0	0	0	0
₩05.31	Door Re-open Low Speed Boundary	1.0~99.0%(Total door width=100%; range between 0%~Pr.05.31 is excluded from low speed detection area)		0	0	0	0	0
₩05.32	Door Re-open Acceleration Boundary	8.0~97.0%(Total door width =100%; range between Pr.05.32~100% is the acceleration area)		0	0	0	0	0
₩05.33	Door Close Error Deceleration Time	0.1~3600sec	0.4	0	0	0	0	0
⊮ 05.34	Door Re-open Detection Time	0~10.0sec	0.2	0	0	0	0	0

06 Protection and Special Parameters

Parameter	Explanation	Settings	Factory Setting	٧F	VFP	SVC	FOC	FOC
₩06.00	Software Braking Level	350.0~450.0Vdc	380.0	0	0	0	0	0
₩06.01	ED Setting of Brake Resistor	0~100%	50	0	0	0	0	0
₩06.02	Current Boundary	0~250%	200				0	0
₩06.03	Forward Motor Torque Limit	0~250%	200				0	0
₩06.04	Forward Regenerative Torque Limit	0~250%	200				0	0
₩06.05	Reverse Motor Torque Limit	0~250%	200				0	0
₩06.06	Reverse Regenerative Torque Limit	0~250%	200				0	0
₩ 06.07	Emergency/Force Stop Deceleration Method	0:Coast to stop 1: Decelerate by 1st decel. time 2: Decelerate by 2nd decel. time 3:By Pr.05.33 setting	3	0	0	0	0	0
₩06.08	Low Voltage Level	160.0~270.0Vdc	180.0	0	0	0	0	0
₩06.09	High Temperature Overheat Warning (OH)	0.0~110.0℃	85.0	0	0	0	0	0
06.10		 Bit 0=0:Not detecting incorrect open/close limit Bit 0=1:Detects incorrect open/close limit Bit 1=0:Door re-open when door close error occur Bit 1=1:Door will not re-open when door close error occur Bit 2=0:Enable S-Curve when door re-open Bit 2=1:Disable S-Curve when door re-open Bit 3=0: When door open complete, will not reset door position to 100.0%. Bit 3=1:When door open complete, resets door position to 100.0% Bit4=0 Door opening in position not supported, limited signal will be output after the torque is enabled. Bit4=1 Door opening in position is supported, limited signal will be output after the torque is enabled. Bit5=0 Reset LVn error automatically, MO terminal sends error signal Bit5=1 Reset LVn error automatically, MO terminal sends error signal 	2	0	0	0	0	0

Parameter	Explanation	Settings	Factory Setting	٧F	VFP	SVC	FOC	FOC
		 Bit6=0 OD and CD signal are input at the same time, but without reaction. Bit6=1 OD and CD signal are input at the same time and with door opening Bit7=0 When the running signal come from an external terminal. Pressing OD and CD buttons to return to running status is not supported when the drive is stopped. Bit7=1 When the running signal come from an external terminal. Pressing OD and CD buttons to return to running status is not supported when the drive is stopped. 						
₩06.11	Position Control Mode	 No limit signal, detect by PG number and current level. Door open limit signal only, door close by PG number or current level detection. Door close limit signal only, door open by PG number or current level detection. Door open and close limit signal Detect by PG number and also accept external door open/close limit signal No limit signal, detect by PG number and current level. (For Pr.00-09=3 speed control mode) 		0	0	0	0	0
₩06.12	Stall Current Level of Position Mode	0.0~200.0% (Drive's rated current)	30.0	0	0	0	0	0
₩06.13	Door Open/Close Holding Time Before Next Demo	0.0~99.99sec	2.0	0	0	0	0	0
06.14	Times of Door Open/Close in Demo Mode (L)	0~9999	0	0	0	0	0	0
06.15	Times of Door Open/Close in Demo Mode (H)	0~9999	0	0	0	0	0	0
06.16	Clear Demo Mode Door Open/Close Record	0: Disable 1: Clear (Pr.06.14 and Pr.06.15)	0	0	0	0	0	0
06.17	Present Fault Record	0: No fault	0	0	0	0	0	0
06.18	2nd Most Recent Fault Record	1: Over-current during acceleration (ocA)	0	0	0	0	0	0
06.19	3rd Most Recent Fault Record	2: Over-current during deceleration (ocd)	0	0	0	0	0	0
06.20	4th Most Recent Fault Record	 Over-current during steady speed (ocn) 	0	0	0	0	0	0
06.21	5th Most Recent Fault Record	4: Reserved	0	0	0	0	0	0
06.22	6th Sixth Most Recent Fault Record	5: Reserved	0	0	0	0	0	0

Parameter	Explanation	Settings	Factory Setting	٧F	VFP	SVC	FOC	FOC
		6: Over-current at stop (ocS)	0	0	0	0	0	0
		7: Over voltage during acceleration (ovA)	0	0	0	0	0	0
		8 Over voltage during deceleration (ovd)	0	0	0	0	0	0
		9: Over voltage during steady speed (ovn)	0	0	0	0	0	0
		10: Over voltage at stop (ovS)	0	0	0	0	0	0
		11: Low voltage during acceleration (LvA)	0	0	0	0	0	0
		12: Low voltage during deceleration (Lvd)	0	0	0	0	0	0
		13: Low voltage during steady speed (Lvn)	0	0	0	0	0	0
		14:Low voltage at stop (LvS)	0	0	0	0	0	0
		15:Phase loss protection (PHL)	0	0	0	0	0	0
		16:IGBT overheat (oH1)	0	0	0	0	0	0
		17:Reserved	0	0	0	0	0	0
		 IGBT overheat protection circuit error (tH1o) 	0	0	0	0	0	0
		19~20: Reserved	0	0	0	0	0	0
		21: 150% 1Min, AC drive overload (oL)	0	0	0	0	0	0
		22: Motor overload (EoL1)	0	0	0	0	0	0
		23~29: Reserved	0	0	0	0	0	0
		30: Memory write-in error (cF1)	0	0	0	0	0	0
		31: Memory read-out error (cF2)	0	0	0	0	0	0
		32: Isum current detection error (cd0)	0	0	0	0	0	0
		33: U-phase current detection error (cd1)	0	0	0	0	0	0
		34: V-phase current detection error (cd2)	0	0	0	0	0	0
		35: W-phase current detection error (cd3)	0	0	0	0	0	0
		36: Clamp current detection error (Hd0)	0	0	0	0	0	0
		37: Over-current detection error (Hd1)	0	0	0	0	0	0
		38: Over-voltage detection error (Hd2)	0	0	0	0	0	0
		39: Ground current detection error (Hd3)	0	0	0	0	0	0
		40: Auto tuning error (AuE)	0	0	0	0	0	0
		41: Reserved	0	0	0	0	0	0
		42: PG feedback error (PGF1)	0	0	0	0	0	0
		43: PG feedback loss (PGF2)	0	0	0	0	0	0
		44: PG feedback stall (PGF3)	0	0	0	0	0	0
		45: PG slip error (PGF4)	0	0	0	0	0	0
		46~48:Reserved	0	0	0	0	0	0
		49:External fault signal input	0	0	0	0	0	0
		50~51: Reserved	0	0	0	0	0	0

Parameter	Explanation	Settings	Factory Setting		VFP	SVC	FOC	FOC
		52:Password error (PcodE)	0	0	0	0	0	0
		53:Software error (ccodE)	0	0	0	0	0	0
		54:Communication time-out (cE1)	0	0	0	0	0	0
		55: Communication time-out (cE2)	0	0	0	0	0	0
		56: Communication time-out (cE3)	0	0	0	0	0	0
		57: Communication time-out (cE4)	0	0	0	0	0	0
		58 Communication time-out (cE10)	0	0	0	0	0	0
		59:PU time-out (cP10)	0	0	0	0	0	0
		60: Brake chopper error (bF)	0	0	0	0	0	0
		61~67: Reserved	0	0	0	0	0	0
		68: Door open/close complete signal error	0	0	0	0	0	0
		69:Door open time-out (DOT)	0	0	0	0	0	0
₩06.23	Electronic Thermal Overload Relay Selection	0: Special motor for AC drive 1: Standard motor 2: Disable	2					
₩06.24	Electronic Thermal Characteristic	30.0~600.0sec	60.0	0	0	0	0	0
₩06.25	Auto Restart After Fault	0~10	0	0	0	0	0	0
₩06.26	Auto Reset Time for Restart after Fault	0.1~600.0	60.0	0	0	0	0	0
06.27	Selection (OT1)	0: disable 1: over-torque detection during constant speed operation, continue to operate after detection 2: over-torque detection during constant speed operation, stop operation after detection 3: over-torque detection during operation, continue to operate after detection 4: over-torque detection during operation, stop operation after detection 10~250%	0	0	0	0	0	0
06.28	(OT1)						0	0
06.29	Over-torque Detection Time (OT1)	0.0~60.0 sec	0.1	0	0	0	0	0

07 Control Parameters

Parameter	Explanation	Settings	Factory Setting	٧F	VFP	SVC	FOC	FOC
₩07.00	ASR (Auto Speed Regulation) Control (P) of Zero Speed	0.0~500.0%	1.5	0	0	0	0	0
₩ 07.01	ASR (Auto Speed Regulation) Control (I) of Zero Speed	0.000~10.000sec	0.050	0	0	0	0	0
₩07.02	ASR (Auto Speed Regulation) Control (P) 1	0.0~500.0%	1.5	0	0	0	0	0
₩ 07.03	ASR (Auto Speed Regulation) Control (I) 1	0.000~10.000sec	0.050	0	0	0	0	0
₩07.04	ASR (Auto Speed Regulation) Control (P) 2	0.0~500.0%	3.0	0	0	0	0	0
₩07.05	ASR (Auto Speed Regulation) Control (I) 2	0.000~10.000sec	0.100	0	0	0	0	0
₩07.06	ASR 1/ASR2 Switch Frequency	0.00~120.00Hz (0:Disable)	2.00	0	0	0	0	0
₩07.07	ASR Primary Low Pass Filter Gain	0.000~0.350sec	0.008	0	0	0	0	0
₩07.08	Zero Speed/ASR1 Width Adjustment	0.00~120.00Hz	2.00		0		0	0
₩07.09	ASR1/ASR2 Width Adjustment	0.00~120.00Hz	5.00		0		0	0
07.10	Mechanical Gear Ratio	1~100	1				0	0
07.11	Inertia Ratio	1~300%	100				0	0
07.12	Zero-speed Bandwidth	0~40Hz	20				0	0
07.13	Low-speed Bandwidth	0~40Hz	20				0	0
07.14	High-speed Bandwidth	0~40Hz	20				0	0
07.15	PDFF Gain Value	0~200%	0				0	0
07.16	Gain for Speed Feed Forward	0~500	0				0	0

08 Multi-step Speed Parameter

Parameter	Explanation	Settings	Factory Setting		VFP	SVC	FOC	FOC
₩08.00	Zero Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.01	1st Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.02	2nd Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.03	3rd Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.04	4th Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.05	5th Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.06	6th Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.07	7th Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.08	8th Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.09	9th Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.10	10th Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.11	11th Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.12	12th Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.13	13th Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.14	14th Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0
₩08.15	15th Step Speed Frequency	0.00~120.00Hz	0.00	0	0	0	0	0

09 Communication Parameters

Parameter	Explanation	Settings	Factory Setting		VFP	SVC	FOC	FOC
₩09.00	Communication Address	01~254	1	0	0	0	0	0
₩09.01	Transmission Speed	4.8~115.2Kbps	19.2	0	0	0	0	0
₩09.02	Transmission Fault Treatment	0: Warn and keep operation 1: Warn and ramp to stop 2: Reserved 3: No action and no display	3	0	0	0	0	0
₩09.03	Time-out Detection	0.0~100.0sec	0.0	0	0	0	0	0
₩ 09.04	Communication Protocol	0: 7N1 (ASCII) 1: 7N2 (ASCII) 2: 7E1 (ASCII) 3: 7O1 (ASCII) 4: 7E2 (ASCII) 5: 7O2 (ASCII) 6: 8N1 (ASCII) 7: 8N2 (ASCII) 8: 8E1 (ASCII) 9: 8O1 (ASCII) 10: 8E2 (ASCII) 11: 8O2 (ASCII) 12: 8N1 (RTU) 13: 8N2 (RTU) 14: 8E1 (RTU) 15: 8O1 (RTU) 16: 8E2 (RTU) 17: 8O2 (RTU) 17: 8O2 (RTU)	13	0	0	0	0	0
₩09.05	Response Delay Time	0.0~200.0ms	2.0	0	0	0	0	0

10 User-defined Parameters

✓ This parameter can be set during operation.

		User-defined Parameters from Group	00 00			1		
Parameter	Explanation	Settings	Factory Setting		VFP	SVC	FOC	FOC
№ 10.00	Start-up Display Selection	0003	Read only	0	0	0	0	0
	Maximum Operation Frequency	0131	Read only	0	0	0	0	0
№ 10.02	Motor Rated Frequency	0132	Read only	0	0	0	0	0
⊮ 10.03	Motor Rated Voltage	0133	Read only	0	0	0	0	0
№ 10.04	2nd Output Frequency (Mid-point frequency)	0134	Read only	0	0	0	0	0
★ 10.05	2nd Output Voltage (Mid-point voltage)	0135	Read only	0	0	0	0	0
	3rd Output Frequency (Mid-point frequency)	0136	Read only	0	0	0	0	0
∦ 10.07	3rd Output Voltage (Mid-point voltage)	0137	Read only	0	0	0	0	0
	4th Output Frequency (Low Frequency)	0138	Read only	0	0	0	0	0
	4th Output Voltage (Low Voltage)	0139	Read only	0	0	0	0	0
∦ 10.10	Door Open Acceleration Time 1	0408	Read only	0	0	0	0	0
∦ 10.11	Door Open Deceleration Time 1	0409	Read only	0	0	0	0	0
∦ 10.12	Door Close Acceleration Time 2	0508	Read only	0	0	0	0	0
∦ 10.13	Door Close Deceleration Time 2	0509	Read only	0	0	0	0	0
⊮ 10.14	Frequency Testing	0015	Read only	0	0	0	0	0
∦ 10.15	Door Open Time by Initial Speed	0402	Read only	0	0	0	0	0
⊮ 10.16	Door Open by Initial Speed	0400	Read only	0	0	0	0	0
∦ 1017	Door Open High Speed	0403	Read only	0	0	0	0	0
⊮ 10.18	Door Open Final Speed	0405	Read only	0	0	0	0	0
	Door Open Holding Torque Level	0410	Read only	0	0	0	0	0
⊮ 10.20	Door Open Holding Torque	0411	Read only	0	0	0	0	0
	Door Close High Speed	0503	Read only	0	0	0	0	0
⊮ 10.22	Door Close Final Speed	0505	Read only	0	0	0	0	0


Parameter	Explanation	Settings	Factory Setting		VFP	SVC	FOC	FOC
₩10.23	Door Close Holding Torque Level	0510	Read only	0	0	0	0	0
₩10.24	Door Close Holding Torque	0511	Read only	0	0	0	0	0
₩10.25	Multi-function Input Terminal Direction	0207	Read only	0	0	0	0	0
⊮ 10.26	Multi-function Input 1	0201	Read only	0	0	0	0	0
≠ 10.27	Multi-function Input 2	0202	Read only	0	0	0	0	0
≠10.28	Multi-function Input 3	0203	Read only	0	0	0	0	0
≠ 10.29	Multi-function Input 4	0204	Read only	0	0	0	0	0
≠10.30	Multi-function Output RY1	0208	Read only	0	0	0	0	0
⊮ 10.31	Multi-function Output RY2	0209	Read only	0	0	0	0	0

11 View User-defined Parameters

Parameter	Explanation		Factory Setting		VFP	SVC	FOC	FOC
11.00 ~	View User-defined Parameters	Pr. 00.00~09.05	-	0	0	0	0	0
11.31								

4-2 Description of Parameter Settings

00 System Parameter	✓ This parameter can be set during operation.
Identity Code of AC Motor Drive	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: Read only
Settings 0:200w	
1:400w	
Rated Current Display of AC Motor I	Drive
Control mode VF VFPG SVC FOCPG FOCPM Settings 0:1.50A 2:2.50A	Factory setting: Read only
Pr. 00-00 displays the identity code of the AC motor	drive. The capacity, rated current, rated voltage and
the max. carrier frequency relate to the identity code	e. Users can use the following table to check how the
rated current, rated voltage and max. carrier frequenced code.	ncy of the AC motor drive corresponds to the identity
Pr.00-01 displays the rated current of the AC motor of the AC motor drive is correct.	drive. By reading this parameter the user can check if
BBB Parameter Reset	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 0
Settings 0: No function	
1: Parameters locked	
8: Keypad locked	
10: All parameters are reset to fa	actory setting (33.3Hz, 230V)
When it is set to 1, all parameters are read only exce setting for password protection.	ept Pr.00-00~00-07 and it can be used with password
When Pr.00-02=10, all parameters are reset to factor	ory setting. If password lock was used, please unlock
first. After Pr.00-02 set to 10, password will also be	cleared and reset to factory setting.
When Pr.00-02=08, the digital keypad will be locked	and only Pr.00-02, Pr.00-07 can be set.
Start-up Display Selection	
Control mode VF VFPG SVC FOCPG FOCPM Settings 0: Display the frequency comma 1: Display the actual output frequ 2: Display the content of user-de 3: Display the output current (A)	uency (H)
This parameter determines the start-up display page	e after power is applied to the drive.
✓ ₩₩₩ Content of Multi Function Display	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 2
Settings 0: Display output current (A) 1: Display actual frequency (Hz) 2: Display DC-BUS voltage (U) 3: Display output voltage(E) 4: Display power factor angle (n.	
www.ma	aher.ir

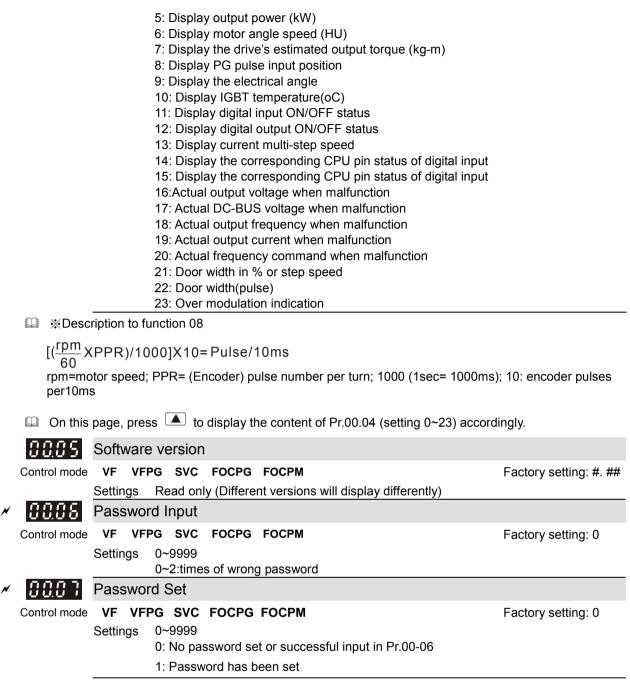

The function of this parameter is to input the password that is set in Pr.0-07. Input the correct password here to enable changing parameters. You are limited to a maximum of 3 attempts. After 3 consecutive failed attempts, a blinking "PcdE" will show up to force the user to restart the AC motor drive in order to try again to input the correct password.

I To set a password to protect your parameter settings.

If the display shows 00, no password is set or password has been correctly entered in Pr.0-06. All parameters can then be changed, including Pr.0-07.

The first time you can set a password directly. After successful setting of password the display will show 01.


Be sure to record the password for later use.

To cancel the parameter lock, set the parameter to 00 after inputting correct password into Pr. 0-07.

The password consists of min. 1 digit and max. 4 digits.

- How to make the password valid again after decoding by Pr.0-07:
 - Method 1: Re-input original password into Pr.0-07 (Or you can enter a new password if you want to use a new one).
 - Method 2: After rebooting, password function will be recovered
 - Method 3: Input any number or character in Pr.00-07, but not password. (The display screen will show END whether the password entered in Pr.00-07 is accurate or not.)

Password Decode Flow Chart

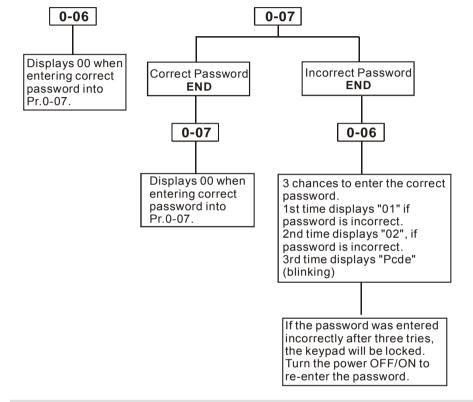

Control Method

Control mode VF VFPG SVC FOCPG FOCPM


Settings 0: V/f control

- 1: V/f Control + Encoder (VFPG)
- 2: Sensorless vector control (SVC)
- 3: FOC vector control + Encoder (FOCPG)
- 8: FOC PM control (FOCPM)
- This parameter is used to select the control mode of AC motor drives.
 - 0: V/f control: user can design proportion of V/f as required and can control multiple motors simultaneously.
 - 1: V/f control + Encoder (VFPG): user can use optional PG card with encoder for the closed-loop speed control.

Factory setting: 0


- 2: Sensorless vector control (SVC): get the optimal control by the auto-tuning of motor parameters.
- 3: FOC vector control+ encoder (FOCPG): besides torque increases, the speed control will be more accurate (1:1000).
- 4: FOC PM control + encoder (FOCPM): besides torque increases, the speed control will be more

accurate (1:1000).

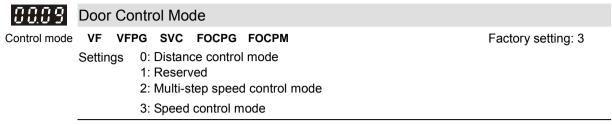


0: Distance control mode

Set encoder PG pulses accurately to ensure precise door width estimation. Door width is measured and stored by Auto-tuning. It operates the door for speed switch and completed position by counting the PG pulses. In this mode, position function will be executed whenever power again and operates with low speed to the 0% or 100% door width by the operation direction.

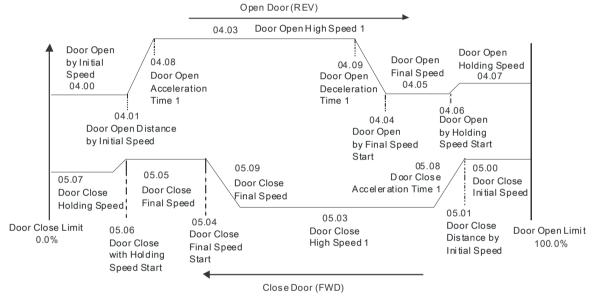


2: Multi-step control mode

The drive is controlled by Sensorless control. For operating the door, it uses three multi-input (level trigger) and operation direction (FWD/REV) to deal with speed switch and limit switch to deal with completed position. (4th logic signal: open: 0; close: 1).

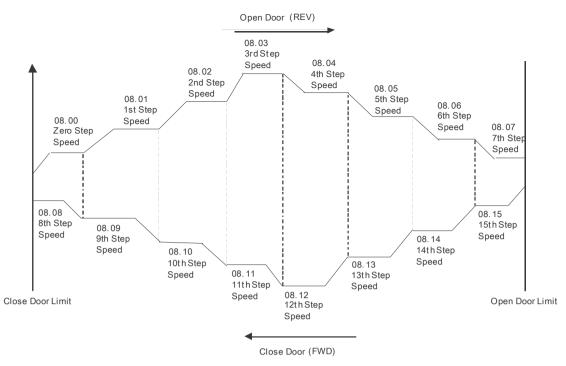


3: Speed Control mode

For operating the door, it switches speed by external signal and uses limit switch to deal with completed position. The signals must be edge trigger. In this mode, it needs to run the door to the close complete position after power on again or AC motor drive stops.

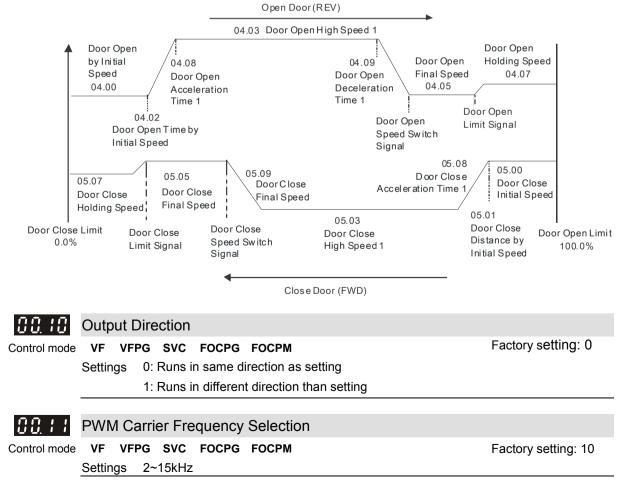

In this parameter determines the PWM carrier frequency of the AC motor drive.

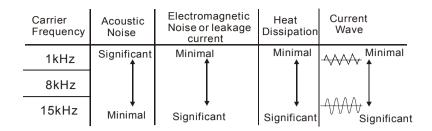

From the table, we see that the PWM carrier frequency has a significant influence on the electromagnetic noise, AC motor drive heat dissipation, and motor acoustic noise. If noises from ambient environment is greater than motor noise, lower PWM carrier frequency will help to lower the temperature of AC motor drive. When PWM carrier frequency is high, though the drive will operate more quietly, but wiring and interference may have problem.

Model VFDXXXDDXXE: Settings 02~10kHz

1

×	88.12	Auto	Volta	ge Re	gulation	(AVR) Function		
	Control mode	VF	VFPG	SVC	FOCPG	FOCPM	Factory setting:	D
		Settin	gs 0:	Enable	AVR			
			1:	Disabl	e AVR			
			2:	Disabl	e AVR wh	en deceleration sto	p	
	The rat	ed volt	age of	the mot	or is usua	ally AC220V/200V 6	0Hz/50Hz and the input voltage of the AC	motor
	drive m	ay var	y betwe	en 180	V to 264	VAC 50Hz/60Hz. T	herefore, when the AC motor drive is used	

drive may vary between 180V to 264 VAC 50Hz/60Hz. Therefore, when the AC motor drive is used without AVR function, the output voltage will be the same as the input voltage. When the motor runs at voltages exceeding the rated voltage with 12% - 20%, its lifetime will be shorter and it can be damaged due to higher temperature, failing insulation and unstable torque output.

- AVR function automatically regulates the AC motor drive output voltage to the Maximum Output Voltage (Pr.1-02). For instance, if Pr.1-02 is set at 200 VAC and the input voltage is at 200V to 264VAC, then the Maximum Output Voltage will automatically be reduced to a maximum of 200 VAC.
- When motor stops with deceleration, it will shorten deceleration time. When setting this parameter to 02 with auto acceleration/deceleration, it will offer a quicker deceleration.

×	00.13	Source of the Master Frequency Command					
	Control mode	VF VFPG SVC FOCPG FOCPM Settings 0: by digital keypad input	Factory setting: 1				
		1: by external terminal					
		2: by RS-485 serial communication					
	🚇 This pa	rameter is used to set the source of the operation command.					
	00.14	Demo Mode					
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 0				
		Settings 0: Disable					
		1: Display demo action					
×	00.15	Frequency Testing Command					
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 0				
		Settings 0~120.00Hz					
	www.maher.ir						

When Pr.00-15 is not 0, door will move in testing frequency, other commands to door will stop.

01 Motor Parameters

✓ This parameter can be set during operation.


0100	Motor A	uto Tuning (PM)	
Control mode		FOCPM	Factory setting: 0
	Settings	0: No function	
	-	1: Auto-tuning for PM motor parameters (brake locked)	
		2: Auto-tuning for PG offset angle without load (Pr.01.09)	
		3: Auto-tuning for PG offset angle with load (Pr.01.09)	

When Pr.01-00 = 2, auto-tune for PG offset angle. Please follow the following 3 rules:

- 1. Unload before Auto-tuning begins.
- 2. If the brake is control by AC motor drive, the drive can complete tuning process after wiring and brake control parameters are set.
- 3. If the brake is control by host controller, maker sure brake is at release status when tuning.
- When Pr.01-00=3, auto-tuning for PG offset angle. Please follow the following 3 rules:
 - 1. Tuning with load or unload are both allow.
 - 2. When the brake is control by the AC motor drive, after wiring and braking parameters are set up, the drive will execute Tuning following the settings.
 - 3. When the brake is control by the host controller, make sure the brake is released before execute Tuning.
 - Make sure Pr.03-02 (Encoder Input Type) is correct; a wrong setting would cause Pr.01-09 (PG offset angle) measurement error.
- When Pr.01-00=1, begins auto-tuning for PM motor by press the [Run] key. After auto-tuning process is completed, the measured value will automatically be written into Pr. 01.05, Pr.01.07 (Rs \ Lq) and Pr.01.08 (Back EMF).
- AUTO-Tuning Process (static rolling) :
 - 1. Make sure the drive is properly installed and all parameter settings are set to the factory setting.
 - 2. Motor: input accurate motor value into Pr.01.01, 01.02, 01.03, 01.04 and adjust the accel. /decel. time according to your motor capacity.
 - 3. Set Pr.01-00=1 and press the "RUN" key on the digital keypad. The motor should now begin auto-tuning. (Note: It is important to fix the motor stably to prevent shaking.)
 - 4. When auto-tuning is complete, check if measured values are written into Pr.01.05 and 01.07.

- ☑ The input rated speed can not be greater than or equal to 120f/p.
- When auto-tuning is in process, an "Auto-tuning" message will show on the digital keypad. Once the process is complete, the "Auto-tuning" message will be cleared and the measured values will be written into Pr.01-09.
- When auto-tuning is in process, if an error occurs or the drive is stopped manually, an "Auto Tuning Err" message will appear on the digital keypad and it indicates auto-tuning failure, please check if the wirings of the drive are proper. When "PG Fbk Error" occurs, please reset Pr.03-02 (if it is originally set to 1, change it to 2). When "PG Fbk Loss" occurs, please check if the Z phase pulse feedback is normal.

88	01	Full-load	d Current of moto	or (PM)		
Con	trol mode			FOCPM		Unit: Amper
COII				FUCEW		Factory setting: 1.00
		Settings	(20~120%)*00.01	Amps		
Ŵ	This va	lue should	be set according to	the rated frequency	y of the motor as indicate	ed on the motor
	namepl	ate. The fa	actory setting is 90%	6 X rated current.		
	Example	: If rated cu	urrent for 400W mo	del is 2.5A. The curr	ent range for user will b	e 0.5~3.0A.
		(2.5*20	%=0.5; 2.5*120%=3	3.0)		
8	182	Rated P	ower of Motor (F	PM)		
Con	trol mode			FOCPM		Factory setting: 0.06
		Settings	0.00~655.35 kW			
Ш	This pa	rameter se	ets motor's rated por	wer. Factory setting	will be the drive's power	r.
8	183	Rated S	peed of PM Mot	or (rpm)		
Con	trol mode			FOCPM		Factory setting: 250
		Settings	0~65535			
Ш	This pa	rameter se	ets motor's rated spo	eed and it must be s	set according to the spec	cification shown on the
	namepl	ate.				
0	1 <u>0</u> 4	Number	of Motor Poles	(PM)		
Con	trol mode			FOCPM		Factory setting: 16
		Settings	2~96			
Ŵ	This pa	rameter se	ets number of motor	poles (odd value is	invalid).	
8	185	Rs of M	otor parameter (PM)		
Con	trol mode			FOCPM	Fa	actory setting: 13.900
		Settings	0.0~655.35Ω			
\overline{U}	185	Ld of Mo	otor Parameter (PM)		
Con	trol mode			FOCPM		Factory setting: 169.4
0	103	Settings	0.0~6553.5mH			
Ü	iji i	Lq of Mo	otor Parameter (
Con	trol mode	Cattinga	0.0.6552.5-	FOCPM		Factory setting: 169.4
		Settings	0.0~6553.5mH			
8	188	Back Ele	ectromotive Ford	e (PM)		
Con	trol mode			FOCPM		Factory setting: 0.0
		Settings	0.0~6553.5Vrms			
Ŵ	This pa	rameter is	used to set back el	ectromotive force (p	hase-phase RMS value) when the motor is
	operate	d in the ra	ted speed.			
	lt can g	et RMS va	alue by Pr.01-00=1 (Motor Auto Tuning)		
8	189	PG Offs	et Angle (PM)			
Con	trol mode			FOCPM		Factory setting: 360.0
		Settings	0.0~360.0°			
0	This nar	ameter is t	o measure the PG o	offset angle of PM m	otor.	



Control mode

FOCPM

Factory setting: 0

Settings 0:No function 1:Reset magnetic pole position

- This function is used to search magnetic pole position and is only available on permanent magnet motor.
- When encoder origin-adjustment function (Pr.01-09= 360.0) is not available, the motor operation efficiency can only achieve up to 86% of its best efficiency. In this case, if user needs to improve the operation efficiency, reapply power or set Pr.01-10=1 to measure magnetic pole position again.

0111	Motor A	uto Tunin	ig (IM)					
Control mode		SVC	FOCPG				Factory setting:	0
	Settings	0: No fun						
		1: Rolling	i test					
		2: Static t	est					
		3: Reserv	/ed					
📖 Set Pr (11_{-11} to 1 (or 2 Press	Run to be	ain auto tunina	The measure	d value will	he written into P	r 1_1


Set Pr.01-11 to 1 or 2, Press [Run] to begin auto tuning. The measured value will be written into Pr.1-17 to Pr.01-20 (Rs, Rr, Lm, Lx, no-load current).

- AUTO-Tuning Process (rolling test):
 - 1. Make sure that all the parameters are set to factory settings and the motor wiring is correct.
 - Make sure the motor has no-load before executing auto-tuning and the shaft is not connected to any belt or gear motor. It is recommended to perform auto-tuning in static test if the motor can't separate from the load.

\mathbf{r}	
J	
_	

	Pr. of Motor
Motor Rated Frequency	01-32
Motor Rated Voltage	01-33
Motor Full-load Current	01-12
Motor Rated Power	01-13
Motor Rated Speed	01-14
Motor Pole Numbers	01-15


- 4. Set Pr.01-11=1 and press [Run], the drive will begin auto-tuning. Please be aware of the motor that it starts spinning as [Run] is pressed.
- 5. When auto-tuning is completed, please check if the measured values are written into Pr.01-16 ~01-20).
- 6. Mechanical equivalent circuit

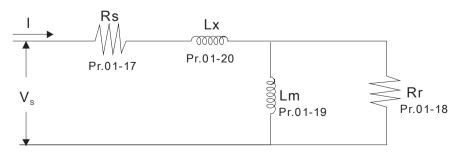

When Pr.01-11 is set to 2 (static test), user needs to write no-load current value of motor into Pr.01-16.

- In torque/vector control mode, it is not recommended to have motors run in parallel.
- ☑ It is not recommended to use torque/vector control mode if motor rated power exceeds the rated power of the AC motor drive.
- ☑ The no-load current is usually 20~50% X rated current.
- ☑ The rated speed can not be greater than or equal to 120f/p (f=rated frequency Pr.01-32; P: number of motor poles Pr.01-15).

Control mode		of Motor (IM)	
00111011110000	VF VFPG SVC		Unit: Amper
		6)*00.01 Amps	Factory setting: 1.00
🚇 This va		ording to the rated frequency of the motor as indicate	ed on the motor
		ng is 90% X rated current.	
namep	ate. The factory setting		
Example	: If rated current for 4	00W model is 2.5A. The current range for user will be	e 0.5~3.0A.
	(2.5*20%=0.5 2.5	*120%=3.0)	
013	Rated power of N	Notor (IM)	
Control mode	SVC	FOCPG	Factory setting: 0.06
	Settings 0.00~655		
This para	ameter sets motor's ra	ated power. Factory setting will be the drive's power.	
0114	Rated speed of II	M Motor (rpm)	
Control mode	VFPG SVC	FOCPG	Factory setting: 250
	Settings 0~65535		
This para	ameter sets motor's r	ated speed and it must be set according to the spe	cification shown on the
nameplat	te.		
0115	Number of Motor	Poles (IM)	
Control mode	VF VFPG SVC	FOCPG	Factory setting: 16
	Settings 2~96		
🛄 This para		f motor poles (odd value is invalid).	
	ameter sets number o		
8116	No-load Current		
	No-load Current		Factory setting: #. ##
0118	No-load Current over the No-load Current of No-load	of Motor (IM)	Factory setting: #. ##
Control mode	No-load Current over the No-load Current of No-load	of Motor (IM) FOCPG .12 factory setting	Factory setting: #. ##
Control mode	No-load Current of VFPG SVC Settings 00~ Pr.01	of Motor (IM) FOCPG .12 factory setting	Factory setting: #. ##
Control mode	No-load Current of VFPG SVC Settings 00~ Pr.01 Setting of the drive's ra Rs of Motor (IM)	of Motor (IM) FOCPG .12 factory setting	Factory setting: #. ## Factory setting: 0.000
Control mode	No-load Current of VFPG SVC Settings 00~ Pr.01 Setting of the drive's ra Rs of Motor (IM)	of Motor (IM) FOCPG .12 factory setting ated current is 40%. FOCPG	
Control mode	No-load Current of VFPG SVC Settings 00~ Pr.01 Setting of the drive's ra Rs of Motor (IM) SVC	of Motor (IM) FOCPG .12 factory setting ated current is 40%. FOCPG	
Control mode	No-load Current of VFPG SVC Settings 00~ Pr.01 setting of the drive's ra Rs of Motor (IM) SVC Settings 0.000~65	of Motor (IM) FOCPG .12 factory setting ated current is 40%. FOCPG	
Control mode Factory s Control mode Control mode Control mode	No-load Current of VFPG SVC Settings 00~ Pr.01 Setting of the drive's ra Rs of Motor (IM) SVC Settings 0.000~65 Rr of Motor (IM)	of Motor (IM) FOCPG .12 factory setting ated current is 40%. FOCPG .535Ω FOCPG	Factory setting: 0.000
Control mode	No-load Current of VFPG SVC Settings 00~ Pr.01 Setting of the drive's ra Rs of Motor (IM) SVC Settings 0.000~65 Rr of Motor (IM) SVC	of Motor (IM) FOCPG .12 factory setting ated current is 40%. FOCPG .535Ω FOCPG	Factory setting: 0.000
Control mode Factory s Control mode Control mode Control mode	No-load Current of VFPG SVC Settings 00~ Pr.01 Setting of the drive's ra Rs of Motor (IM) SVC Settings 0.000~65 Rr of Motor (IM) SVC Settings 0.0~65.53	of Motor (IM) FOCPG .12 factory setting ated current is 40%. FOCPG .535Ω FOCPG	Factory setting: 0.000
Control mode Factory s Control mode Control mode Control mode Control mode	No-load Current of VFPG SVC Settings 00~ Pr.01 Setting of the drive's ra Rs of Motor (IM) SVC Settings 0.000~65 Rr of Motor (IM) SVC Settings 0.0~65.53 Lm of Motor (IM)	of Motor (IM) FOCPG .12 factory setting ated current is 40%. FOCPG .535Ω FOCPG 35Ω FOCPG	Factory setting: 0.000 Factory setting: 0.000
Control mode Factory s Control mode Control mode Control mode Control mode	No-load Current of VFPG SVC Settings 00~ Pr.01 Setting of the drive's ra Rs of Motor (IM) SVC Settings 0.000~65 Rr of Motor (IM) SVC Settings 0.0~65.53 Lm of Motor (IM) SVC	of Motor (IM) FOCPG .12 factory setting ated current is 40%. FOCPG .535Ω FOCPG 35Ω FOCPG	Factory setting: 0.000 Factory setting: 0.000

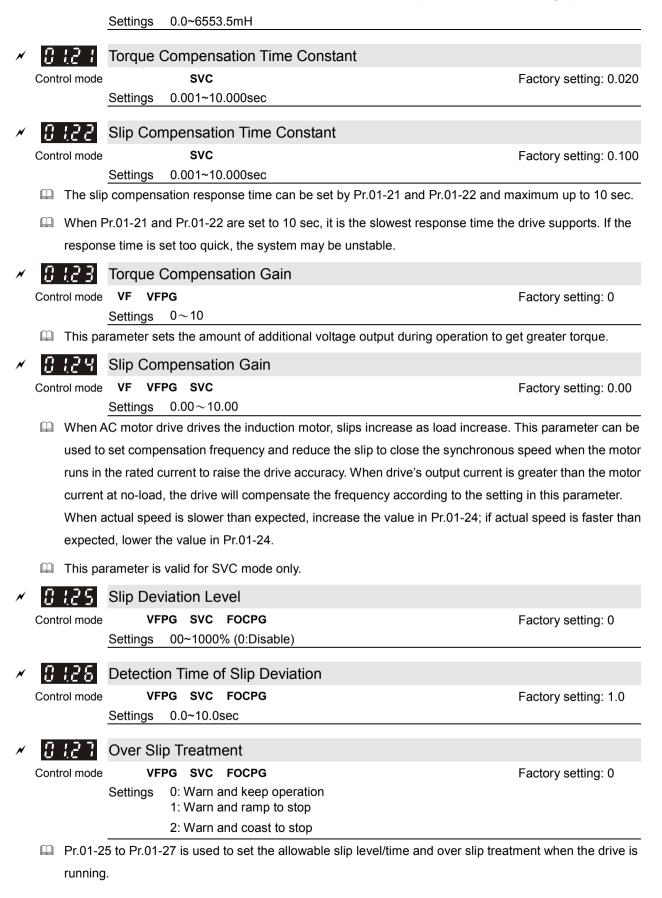

ww_maher_ir

Hunting Gain

Control mode VF VFPG SVC

Settings 0~10000 (0: No action)

The motor will have current wave motion in some specific area. It can improve this situation by setting this parameter. (When it is high frequency or run with PG, it can be set to 0. when the current wave motion happens in the low frequency, please increase the value in Pr.01-28.)

1 12 9 Accumulative Motor Operation Time (Min.)	
Control mode VF VFPG SVC FOCPG Settings 0~1439	Factory setting: 0
Accumulative Motor Operation Time (day)	
Control mode VF VFPG SVC FOCPG Settings 0~65535	Factory setting: 0
This parameter records the motor running time. When Pr.01-29 and Pr.01-3	0 are set to 00, it clears the
setting to 0. Operation time will not be recorded if it is shorter than 60 sec.	
B (3) Maximum Output Frequency	
Control mode VF VFPG SVC FOCPG FOCPM Settings 10.00~120.00Hz	Factory setting: 50
This parameter determines the AC motor drive's Maximum Output Frequen	cy. All the AC motor drive
frequency command sources (analog inputs 0 to +10V, 4 to 20mA, 0 to 20n	Aand ±10V) are scaled to
correspond to the output frequency range.	
3 (32 Output Frequency 1(Base frequency /Motor rated freque	ency)
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 50
Settings 0.00~120.00Hz	
This value should be set according to the rated frequency of the motor as in	ndicated on the motor
nameplate. If the motor is 60Hz, the setting should be 60Hz. If the motor is	50Hz, it should be set to
50Hz.	
3 13 Output Voltage 1(Base voltage/Motor rated voltage)	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 220.0
Settings 0.0V~240.0V	
This value should be set according to the rated voltage of the motor as indic	
If the motor is 220V, the setting should be 220.0. If the motor is 200V, it sho	uld be set to 200.0.
\square There are many motor types in the market and the power system for each of	ountry is also difference. The
economic and convenience method to solve this problem is to install the AC	motor drive. There is no
problem to use with the different voltage and frequency and also can ampli	y the original characteristic
and life of the motor.	
Image: Second state Image: Second stat <	
Control mode VF VFPG	Factory setting: 0.50
Settings 0.00~120.00Hz	
Cutput Voltage 2	
Control mode VF VFPG	Factory setting: 5.0
Settings 0.0V~240.0V	
Output Frequency 3	


Control mode VF VFPG

N

Factory setting: 0.50

	Settings 0.00~120.00Hz	
× 8131	Output Voltage 3	
Control mode	VF VFPG	Factory setting: 5.0
	Settings 0.0V~240.0V	
0 138	Output Frequency 4	
Control mode	VF VFPG SVC FOCPG	Factory setting: 0.00
	Settings 0.00~120.00Hz	
× 0139	Output Voltage 4	
Control mode	VF VFPG	Factory setting: 0.0
	Settings 0.0V~240.0V	

- V/f curve setting is usually set by the motor's allowable loading characteristics. Pay special attention to the motor's heat dissipation, dynamic balance, and bearing lubricity, if the loading characteristics exceed the loading limit of the motor.
- □ The frequency setting of V/F curve must be set according to this rule, Pr. 01.32≥01.34≥01.36≥01.38. There is no limit for the voltage setting, but a high voltage at low frequency may cause motor damage, overheat, and stall prevention or over-current protection. Therefore, please use the low voltage at the low frequency to prevent motor damage.

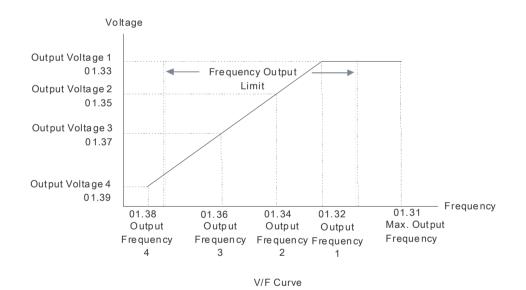

02 Input/Output Parameters

✓ This parameter can be set during operation.

02.00 2-wire/3	3-wire Operation Control	
Control mode VF VF	FPG SVC FOCPG FOCPM	Factory setting: 0
Settings	0 FWD/STOP	
	1 FWD/STOP, REV/STOP (Line Start Lockout)	
	2 RUN/STOP, REV/FWD	
	3 RUN/STOP, REV/FWD (Line Start Lockout)	
When line start lo	ockout is enabled, the drive will not run once applying the powe	er. The Line Start Lockout

When line start lockout is enabled, the drive will not run once applying the power. The Line Start Lockout feature doesn't guarantee the motor will never start under this condition. It is possible the motor may be set in motion by a malfunctioning switch. This parameter sets the drive's lock when power is applied.

This parameter sets three different control modes by external control:

Pr.02-00	Control Circuits of the External Terminal
Setting: 0, 1 2-wrie operation control (1) Open the door/STOP Close the door/STOP	OD/STOP CD/STOP CD/STOP OD:("OPEN":STOP) ("CLOSE":open the door) CD:("OPEN":STOP) ("CLOSE":close the door) COM
Setting: 2, 3 2-wrie operation control (1) Open the door/Close the door RUN/STOP	RUN/STOP OD/CD/CD/CD OD/CD/CD/CD OD/CD/CD/CD OD/CD/CD/CD/CD/CD/CD/CD/CD/CD/CD/CD/CD/CD

B2.8 I Multi-Function Input 1 (MI1)

		Factory setting: 1	4
58.58	Multi-Function Input 2 (MI2)		
		Factory setting: 1	5
82.83	Multi-Function Input 3 (MI3)		
		Factory setting: 1	6
82.8 Y	Multi-Function Input 4 (MI4)		
		Factory setting: 1	7

Multi-Function Input 5 (MI5)

			Facto	ory set	ting: 0	
Settings	Control mode	VF	VFPG	SVC	FOCPG	FOCPM
0: No function		0	0	0	0	0
1: Multi-step speed command 1		0	0	0	0	0
2: Multi-step speed command 2		0	0	0	0	0
3: Multi-step speed command 3		0	0	0	0	0
4: Multi-step speed command 4		0	0	0	0	0
5: Fault reset		0	0	0	0	0
6: Low speed operation		0	0	0	0	0
7: OD/CD command for low speed operation		0	0	0	0	0

8: 1st, 2nd acceleration/deceleration time selection	0	0	0	0	0
9: Force stop (NO) input	0	0	0	0	0
10: Demo mode	0	0	0	0	0
11: Emergency stop (NO) input	0	0	0	0	0
12: Source of operation command (Keypad/External terminals)	0	0	0	0	0
13: Parameter lock enable (NC)	0	0	0	0	0
14: Door open complete signal	0	0	0	0	0
15: Door close complete signal	0	0	0	0	0
16: Door open speed switch signal	0	0	0	0	0
17: Door close speed switch signal	0	0	0	0	0
18: Open allowance signal	0	0	0	0	0
19: Screen signal input	0	0	0	0	0
20: Door curve signal input for 2nd set door open/close	0	0	0	0	0
21: Reset signal input	0	0	0	0	0
22: Input system security circuit confirmation signal (DCC)	0	0	0	0	0
23: Input enforced door closing signal (NUD)	0	0	0	0	0

This parameter selects the functions for each multi-function terminal.

Summary of Function Settings:

Settings	Functions	Descriptions
0	No function	Any unused terminals should be programmed to 0 to insure they have no effect on operation.
1	Multi-step speed command 1	When door control mode (Pr.00-09)is set 2 (multi-step speed
2	Multi-step speed command 2	control), these four inputs can be used for 16 step speed
3	Multi-step speed command 2 Multi-step speed command 3	rrequencies
4	Multi-step speed command 4	
5	Fault reset	Reset drive setting after fault is cleared.
6	Low speed operation	Before using this function, please make sure that AC motor drive is stop. At this moment, key "STOP" on the digital keypad is still valid. When this contact is OFF, motor will stop by deceleration time of low speed operation.
7	OD/CD command for low speed operation	ON: open the door (OD) OFF: closer the door (CD) This command will be effective only when external terminal for low speed operation is active.
8	1st, 2nd acceleration/deceleration time selection	When signal is input, the AC motor drive can switch between 1st and 2nd acceleration/deceleration time
9	Force stop (NO) input	This parameter has the same function as the "STOP" command and no error message will be displayed. It does not require a RESET but a new RUN command is needed for the drive to run again.
10	Demo mode	When this setting is enabled, the output frequency of AC motor drive will run by open/close curve repeatedly till this setting is disabled. It will get the best open/close curve by this action.
11	Emergency stop (NO) input	When setting to 11, the Multi-Function Input Terminal can be used to stop the AC motor drive in case of malfunction in the application. It will display "EF". Please "RESET" after the fault has been cleared.
12	Source of operation command (Keypad/External terminals)	ON: Operation command via Ext. Terminals OFF: Operation command via Keypad Pr.00-14 is disabled if this parameter is set to 13.
13	Parameter lock enable (NC)	When this setting is enabled, all parameter reading value will be 00. This setting must be disabled in order to read the parameter content.

14		When Pr.06-11 is set to 01 or 03, drive will open the door to the completed position by this signal.
15	1 0	When Pr.06-11 is set to 02 or 03, drive will close the door to the completed position by this signal.
16	Door open speed switch signal	When door control mode (pr.00-09) is set to 3 speed control mode this terminal can be used for switching speed.
17		When door control mode (pr.00-09) is set to 3 speed control mode this terminal can be used for switching speed.
18		When this setting is enabled, it allows opening the door. It also ca be used for the signal of door zone.
19	Screen signal input	
20		When this setting is ON, it will run the curve of 2nd step doc open/close.
21	Reset signal input	When parameter is set to 21, the drive re-positioning begins.
22	confirmation signal (DCC)	When the motor drive receives this signal then any door closin signal will not be input. And the door will remain at the actuatio position
23		When the motor drive receives this signal, it will close at low spee (Pr03-10), but does not respond to stop closing door function.

Digital Terminal Input Debouncing Time (MD-5-13)

VFPG SVC FOCPG FOCPM Control mode VF

Settings 0.001~30.000sec

Factory setting: 0.005

Inis parameter is to delay the signals on digital input terminals. 1 unit is 2.5 msec. The delay time is to debounce noisy signals that could cause the digital terminals to malfunction but response time maybe a bit slower.

Digital Input Operation Direction

Control mode	VF	VFPG	SVC	FOCPG	FOCPM	Factory setting: 60
	Settin	gs 0~	~6553	5		

- This parameter is used to set the input signal level.
- bit 0 is CD terminal, bit 1 is OD terminal and bit 2~bit 6 areMI1~MI5 . Ŵ
- User can change the terminal status ON/OFF by communicating.

For example, MI1 is set to 1 (multi-step speed command 1), MI2 is set to 2 (multi-step speed command 2). Then the forward + 2nd step speed command=1001(binary) =9 (Decimal). Only need to set Pr.02-07=9 by communication and it can forward with 2nd step speed. It doesn't need to wire any multi-function terminal.

bit6	bit5	bit4	bit3	bit2	bit1	bit0
MI5	MI4	MI3	MI2	MI1	OD	CD

Multi-function Output (Relay1) 10208

Factory setting: 16

Multi-function Output (Relay2)

Factory setting: 17

Multi-function Output (MO1)

Factory setting: 0

Multi-function Output (MO2)

Factory setting: 0

4-40 ww.maher.ir



B2 12 Multi-function Output (MO3)

			Facto	ory sett	ing: 0	
Settings	Control mode	VF	VFPG	SVCF	OCPG	FOCPM
0: No function		0	0	0	0	0
1: AC drive in operation		0	0	0	0	0
2: Zero speed frequency signal (including STO	P)	0	0	0	0	0
3: AC drive ready		0	0	0	0	0
4: Low voltage warning(Lv)		0	0	0	0	0
5: Fault indication		0	0	0	0	0
6: Overhead warning (Pr.06.09)		0	0	0	0	0
7: Detection of braking resistor action level		0	0	0	0	0
8: Warning indication		0	0	0	0	0
9: Over voltage warning		0	0	0	0	0
10: OD command		0	0	0	0	0
11: CD command		0	0	0	0	0
12: Demo Indication		0	0	0	0	0
13: Demo complete		0	0	0	0	0
14: Emergency stop indication		0	0	0	0	0
15: Force stop indication		0	0	0	0	0
16: Door open complete (limit) signal output		0	0	0	0	0
17: Door close complete (limit) signal output		0	0	0	0	0
18: Door Close Error		0	0	0	0	0
19: Position Complete Signal		0	0	0	0	0
20: Position Detection 1(for door close only)		0	0	0	0	0
21: Position Detection 2(for door close only)		0	0	0	0	0
22: Position Detection 3(for door close only))		0	0	0	0	0
23: Position Detection 1(for door open only)		0	0	0	0	0
24: Position Detection 2(for door open only)		0	0	0	0	0
25: Position Detection 3(for door open only)		0	0	0	0	0
26: PG feedback error		0	0	0	0	0
27: output signal when unable to open the door28: over torque (OT1)						

 $\hfill\square$ These parameters can be used for external terminal output

Summary of Function Settings

Settings	Functions	Descriptions
0	No function	MO has no function.
01	AC drive in operation	The drive is ON when it receives voltage or operation command.
2	Zero speed frequency signal (including STOP)	Zero speed output signals (including STOP).
3	AC drive ready	Active when the drive is ON and no abnormality detected or abnormality is cleared.
4	Low voltage warning(Lv)	Active when the detected input voltage is too low.
5	Fault indication	Active when fault occurs.
6	Overhead warning (Pr.06.09)	Active when IGBT or heat sink overheats to prevent OH turn off the drive. When temperature higher than $85^{\circ}C$ = ON, lower than $<80^{\circ}C$ = OFF.
7	Detection of braking resistor action level	Active when drive begins software braking, this signal can be used as brake module VFDB action signal or indicator.
8	Warning indication	Active when warning is detected.
9	Over voltage warning	Active when over-voltage is detected.

10	OD command	Active when the operation direction is door open.
11	CD command	Active when the operation direction is door close.
12	Demo Indication	Active when the drive is in demo mode.
13	Demo complete	Active when each time door open/close is complete in demo mode (contact closed for 0.5s only).
14	Emergency stop indication	Active when emergency stop is detected.
15	Force stop indication	Active when force stop is detected.
16	Door open complete (limit) signal output	Active when position mode (Pr.06-11) is set to "no door close limit signal" and the door width is greater than the setting in Pr.04-06.
	Signal output	Active when position mode (Pr.06-11) is set to door close limit signal allow and one of MI (Pr.02-01~02-05) is set to 14.
17	Door close complete (limit) signal output	Active when position mode (Pr.06-11) is set to "no door close limit signal" and the door width is less than Pr.05-06 setting during the door close.
		Active when position mode (Pr.06-11) is set to door close limit signal allow and one of MI (Pr.02-01~02-05) is set to 15.
18	Door close error	Active when door close error. (Includes door reopen and not reopen).
19	Position complete signal	Active when positioning is completed after drive power is on or PGEr. This function is valid when Pr.00-10=00.
20	Position Detection 1(for door close only)	Active when door close width is lower than Pr.06-14 (valid whe door close).
21	Position Detection 2(for door close only)	Active when door close width is lower than Pr.06-15 (valid whe door close).
22	Position Detection 3(for door close only))	Active when door close width is lower than Pr.06-16 (valid whe door close).
23	Position Detection 1(for door open only)	Active when door close width is lower than Pr.06-14 (valid whe door open).
24	Position Detection 2(for door open only)	Active when door close width is lower than Pr.06-14 (valid whe door open).
25	Position Detection 3(for door open only)	Active when door close width is lower than Pr.06-14 (valid whe door open).
26	PG feedback error	Active when PG feedback signal error is detected
27	output signal when unable to open the door	
28	over torque (OT1)	

✓ 32.13 Digital Output Direction

Control mode	VF	VFPG	SVC	FOCPG	FOCPM	Factory setting: 0
	Settin	gs 00	\sim 655	35		

This parameter is set via bit setting. If a bit is 1, the corresponding output acts in the opposite way. Example:

If Pr02-08=1 (operation indication) and Pr.02-13=0, Relay 1 RA-RC is closed when the drive runs and is open when the drive is stopped.

If Pr02-08=1 and Pr02-13=1, Relay 1 RA-RC is open when the drive runs and is closed when the drive is stopped.

B2 1 Position Detection Signal 1

N

×

Control mode VF VFPG SVC FOCPG FOCPM Settings 0.0~100.0% Factory setting: 25.0

B2 15 Position Detection Signal 2

Control mode	VF	VFPG	SVC	FOCPG	FOCPM	Factory setting: 12.5
<u>s</u>	Setting	gs 0.0	0~100.	0%		

×	81.58	Position Detection Signal 3							
(Control mode	VF	VFPG	SVC	FOCPG	FOCPM	Factory setting: 7.5		
		Settin	gs 0.0	0~100.	0%				

When Pr.02-12 (multi-function output terminal)are set to 16~18, it will output a signal once the door is in position that Pr.02-14~02-16 set.

03

3 Fe	edba	ack Pa	ramet	er			✓ This parameter	can be set during opera	ation.
8	3.8.8	Encode	r (PG) S	ignal Typ	be				
	rol mode		PG 0: No fu	FOCPG	FOCPM			Factory setting: 7	
			1: ABZ 7: PWM						
	Detecti	on of the n	nagnetic p	ole: Settin	g 1: The A	AC moto	r drive will output sh	ort circuit to detect the	
	positior	n of the ma	agnetic po	le. At this i	noment, t	he moto	r will generate a little	e noise.	
	Refere	nce table f	or encode	r and tunir	ng				
	Settin	g of PG si	gnal type	Encoder	(PG) Sign	al type	Pr.01-00=01	Pr.01-00=03	
		03.00=1	l		A, B, Z		Motor will run	Motor will run	
		03.00=7	7		PWM		Motor will run	Motor will run	
8	3.8 1	Encode	r pulse						
Cont	rol mode	VF	PG	FOCPG	FOCPM			Factory setting: 2	56
		Settings	1~25000)					
							-	dback signal of the moto	or
	speed.	This parar	neter defi	nes the nu	mber of p	ulses for	r each cycle of the P	G control (PPR).	
\boldsymbol{B}	3.82	Encode	r Input T	ype Sett	ing				
Cont	rol mode		PG	FOCPG	FOCPM			Factory setting: 1	
		Settings	0: Disab 1: Phase commar	e A leads i	n a forwai	rd run co	ommand and phase	B leads in a reverse run	
					rward A ining B	FWD		<u>, </u>	
			2: Phas comma		in a forwa		ommand and phase	A leads in a reverse rur	ו
				ý · • •	ward A ning B			<u>,</u>	
				se A is a p n, high inp		rd directi		nput. (low input=reverse	
	Forward B B C C C C C C C C C C C C C C C C C								
				se A is a p n, high inp		se directi	on)	nput. (low input=forward	
					rward A _ ining B _	FWD			
			5: Sing	le-phase ii	nput				
					ward ning A _				

 $\hfill\square$ It is helpful for the stable control by inputting correct pulse type.


4-44 www.maher.ir


		51
× 838	Encoder Feedback Fault Treatment (PGF1, PGF2)	
Control m		Factory setting: 2
	Settings 0: Warn and keep operation 1: Warn and ramp to stop	
	2: Warn and stop operation	
× <u>838</u>	Petection Time for Encoder Feedback Fault	
Control m		Factory setting: 1.0
~~ \ \	Settings 0.0~10.0sec	
	en PG loss, encoder signal error, pulse signal setting error or signal er	
	ection time for encoder feedback fault (Pr.03-04), the PG signal error w	vill occur. Refer to the Pr.03-03
for	encoder feedback fault treatment.	
✓ 83.8	5 Encoder Stall Level (PGF3)	
Control m	ode VFPG SVC FOCPG FOCPM	Factory setting: 115
	Settings 0~120% (0: disable)	
	s parameter determines the maximum encoder feedback signal allowe	d before a fault occurs. (max.
out	put frequency Pr.01-31 =100%)	
✓ 838	5 Encoder Stall Detection Time	
Control m	ode VFPG SVC FOCPG FOCPM	Factory setting: 0.1
	Settings 0.0~2.0sec	
0.00	Encoder feedback error (Max. output frequency Pr.01-	31=100%)
<u>~ 030</u>	Encoder Slip Range (PGF4)	
Control m		Factory setting: 50
	Settings 0~50% (0:disable) Encoder feedback error (Max. output frequency Pr.01-3	31=100%)
× 838	Encoder Slip Detection Time	
Control m		Factory setting: 0.5
	Settings 0.0~10.0sec	
	Encoder feedback error (Max. output frequency Pr.01-	31=100%)
× <u>838</u>	S Encoder Stall and Slip Error Treatment	F (1 1 1 1
Control m		Factory setting: 2
	Settings Encoder PG signal feedback error (Max. output freque 0: Warn and keep operation	ncy Pr.01-31=100%)
	1: Warn and ramp to stop	
	2: Warn and coast to stop	
	en the value of (rotation speed – motor frequency) exceeds Pr.03-07 s	-
	03-08 or motor frequency exceeds Pr.03-05 setting, it will start to accur	
exc	eeds Pr.10-06, the encoder feedback signal error will occur. Refer to P	r.03-09 encoder stall and slip
erro	or treatment.	
831	B Door Width Auto-tuning Frequency	
Control m		Factory setting: 5.0
	Settings 0.10~120.00Hz	, ,
🚇 This	s parameter is the frequency of motor when using door width auto-tunin	ng function.
<u>03</u> ;	Door Width Auto-tuning	
Control m		Factory setting: 0
20.00111		setely county o
	www.maher.ir	


Settings 0: Disable

1: Enable

- The door width will be difference due to its application. For example, the door of the freight elevator is much wider than passenger elevator. Therefore, it needs to have door width auto tuning function to measure the correct door width for the correct position and door open/close. This parameter is suitable for the condition when door control mode is set to distance control mode (Pr.00-10=0).
- Deprocedure for the door width auto-tuning function:
 - 1. Close the door and make sure it reaches its close complete position, and then open the door to measure the door width and close the door again to double check the door width.
 - 2. After door width auto-tuning is complete, the measured value will write into Pr.03-12 and Pr.03-13 automatically.

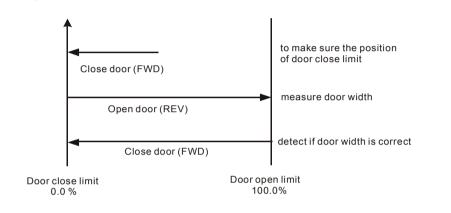





 Control mode
 VF
 VFPG
 SVC
 FOCPG
 FOCPM
 Factory setting: 0


 Settings
 0~9999 (Unit:10000)
 Foce
 Factory setting: 0
 Factory setting: 0

After door width auto tuning (Pr.03-11=1) is completed, door width pulses will write into Pr.03-12 and Pr.03-13 automatically. User can also manually input door width pulses into Pr.03-12 and Pr.03-13.

04	Door O	pen Parameters	✓ This parameter can be set during operation.
×	8488	Door Open by Initial Speed	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 2.00
		Settings 0.00~120.0Hz	
×	0401	Door Open Distance by Initial Speed	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 300
		Settings 0~65535 (pulses number)	
N	0402	Door Open Time by Initial Speed	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 1.0
,	0.000	Settings 0~20.0s	
×	0403	Door Open High Speed 1	
	Control mode		Factory setting: 15.00
	0.000	Settings 0.00~120.0Hz	
×	<u> </u>	Door Open by Final Speed Begins	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 90.0
~	nunc	Settings 0.0~100.0% (Door width setting in %)
~	<u>04.05</u>	Door Open Final Speed	Fostory setting: 5.00
	Control mode	VF VFPG SVC FOCPG FOCPM Settings 0.00~120.0Hz	Factory setting: 5.00
×	0408	Door Open by Holding Speed Begins	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 95.0
		Settings 0.0~100.0% (Door width setting in %	
N	0407	Door Open Holding Speed	,
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 2.00
		Settings 0.00~120.0Hz	
×	0408	Door Open Acceleration Time 1	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 1.0
		Settings 0.1~3600sec	
×	0409	Door Open Deceleration Time 1	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 1.0
		Settings 0.1~3600sec	
×	04.10	Door Open Holding Torque Level	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 50.0
	0.5	Settings 0.0~150.0% (AC drive's rated curren	
	Door op	pen distance (Pr.04-01) is set in pulses number b	but when converting into %; it must be smaller

than the setting in Pr.04-04. Door close completely is 0% and door open completely is 100%.

Please refer to the diagram below and adjust door open/close curve to your requirement.

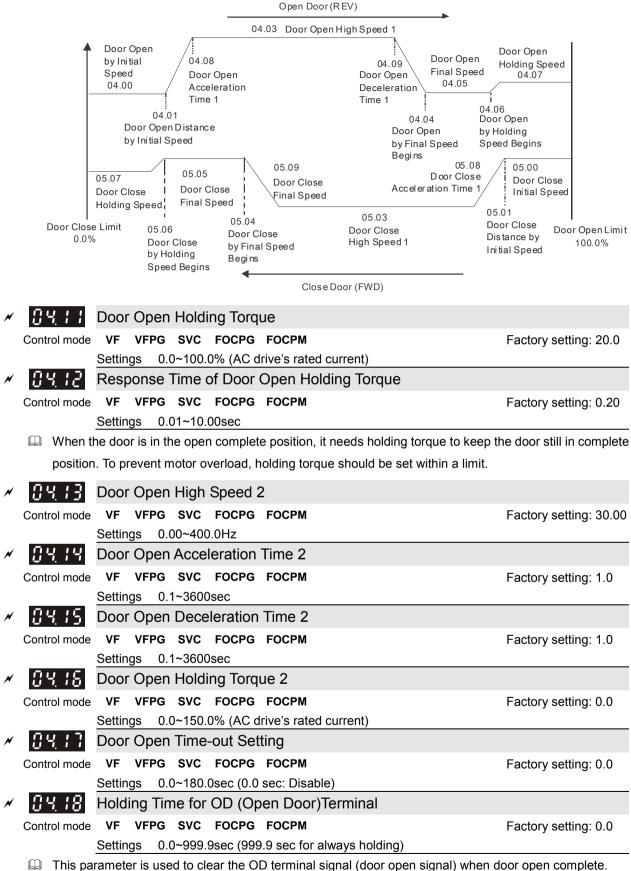


During the holding period, AC Motor Drive will still be in RUN status. After holding time, AC Motor Drive will STOP. The holding time is valid only when door open has reached the complete position.

- Within the holding time, when CD command (door close command) is given, the drive will begin door close action.
- When Pr.04-18 set to 999.9. OD terminal is executing a permanent holding command, user can only terminate this command by using the STOP/RESET key on digital keypad.

×	84:9	Door (Door Open Acceleration Time of S1 Curve								
	Control mode	VF \	VFPG	SVC	FOCPG	FOCPM				Factory setting: 0.0	
	Settings 0.0~10.0sec										
×	0420	Door	Open	Acce	leration	Time of S2	2 Curve				
	Control mode	VF	VFPG	SVC	FOCPG	FOCPM				Factory setting: 0.0	
		Setting	s 0.0	~10.0s	sec						
	~ .										

- This parameter is used to ensure smooth acceleration and deceleration via S-curve, different setting will create different S-curve. When this function is activated, the drive will create a smooth acceleration and deceleration curve by original acceleration and deceleration time. Setting Pr.04-19=0.0 or Pr.04-20=0.0 will create a linear acceleration and deceleration curve.
- Actual acceleration time = the selected acceleration time for door open + (Pr.04.19 + Pr.04.20)/2





Door Open DC Brake Current Level

Control mode VF VFPG SVC Factory setting: 0

Settings 0~100%

This parameter sets the level of DC Brake Current output to the motor during start-up and stopping. When setting DC Brake Current, the Rated Current (Pr.00-01) is regarded as 100%. It is recommended to start with a low DC Brake Current Level and then increase until proper holding torque has been attained. Do not set Pr.04-21 greater than rated current in order to prevent motor damage. Also for your personal safety, do not use DC braking for door holding action.

When AC motor drive is in FOCPG/FOCPM control mode, DC brake functions are ready to use, no additional setting is required.

×	Open DC Brake Time when Startup										
	Control mode	VF	VFPG	SVC	FOCPG	FOCPM	Factory setting: 0.0				
	Settings 0.0~60.0sec										
	This parameter determines the duration of the DC Brake current after a RUN command.										

ŀ

×	0423	Door Open DC Brake Time when Stopping									
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 0.0								
		Settings 0.0~60.0sec									
	This parameter determines the duration of the DC Proke current during braking										


This parameter determines the duration of the DC Brake current during braking.

×	0424	Door Open DC Brake Starting Frequency	
	Control mode	VF VFPG SVC FOCPG	Factory setting: 0.00
		Settings 0.00~120.00Hz	

During the period AC motor drive decelerating to stop, this parameter sets the DC brake starting frequency If Pr.04-24 is lower than Pr.01-09 (starting frequency), DC brake will regards lowest frequency as starting frequency.

05	Door C	Iose Parameters	e set during operation.
N	05.00	Door Close initial Speed	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 2.00
		Settings 0.00~120.0Hz	
×	05.01	Door Close Distance by Initial Speed	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 0
		Settings 0~65535 (Unit: pulses number)	
N	05.02	Door Close Time by Initial Speed	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 0
		Settings 0.0~20.0s	
N	05.03	Door Close High Speed 1	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 15.00
	<u> </u>	Settings 0.00~120.0Hz	
×	<u>85.84</u>	Door Close by Final Speed Begins	
	Control mode		Factory setting: 10.0
	ococ	Settings 0.0~100.0% (0.0%=door completely close, 100.0%= door com	npletely open)
×	05.05	Door Close Final Speed	
	Control mode		Factory setting: 5.00
	05.06	Settings 0.00~120.0Hz Door Close by Holding Speed begins	
~	Control mode	VF VFPG SVC FOCPG FOCPM	Factory actting: 5.0
	Control mode	Settings 0.0~100.0% (0.0%=door completely close, 100.0%= door con	Factory setting: 5.0
N	05.07	Door Close Holding Speed	
,	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 2.00
		Settings 0.00~120.0Hz	r dotory ootting. 2.00
×	05.08	Door Close Acceleration Time 1	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 1.0
		Settings 0.1~3600sec	
×	05.09	Door Close Deceleration Time 1	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 1.0
		Settings 0.1~3600sec	
×	05.40	Door Close Holding Torque Level	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 50.0
	~ - :	Settings 0.0~150.0% (Drive's rated current)	

Please refer to the diagram below and adjust door open/close curve to your requirement.

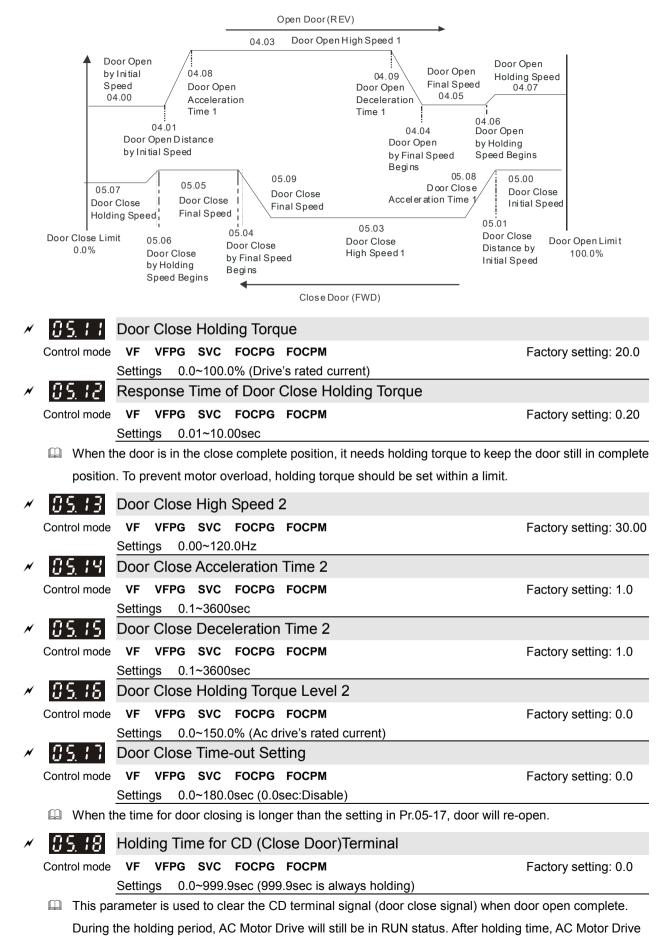


will STOP. The holding time is valid only when door open has reached the complete position.

- Within the holding time, when OD command (door open command) is given, the drive will begin door close action.
- When Pr.05-18 set to 999.9, CD terminal is executing a permanent holding command, user can only terminate this command by using the STOP/RESET key on digital keypad.

×	85.19	Door Close Acceleration Time of S1 Curve							
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 0.0						
		Settings 0.0~10.0sec							
×	05.20	Door Close Acceleration Time of S2 Curve							
	Control mode	Factory setting: 0.0							
		Settings 0.0~10.0sec							

- This parameter is used to ensure smooth acceleration and deceleration via S-curve, different setting will create different S-curve. When this function is activated, the drive will create a smooth acceleration and deceleration curve by original acceleration and deceleration time. Setting Pr.05-19=0.0 or Pr.05-20=0.0 will create a linear acceleration and deceleration curve.
- □ Actual acceleration time = the selected acceleration time for door close + (Pr.05.19 + Pr.05.20)/2



152 Door Close DC Brake Current Level

Control mode

VF VF	PG SVC	Factory setting: 0
Settinas	00~100%	


- This parameter sets the level of DC Brake Current output to the motor during start-up and stopping. When setting DC Brake Current, the Rated Current (Pr.00-01) is regarded as 100%. It is recommended to start with a low DC Brake Current Level and then increase until proper holding torque has been attained. Do not set Pr.05-21 greater than rated current in order to prevent motor damage. Also for your personal safety, do not use DC braking for door holding action.
- When AC motor drive is in FOCPG/FOCPM control mode, DC brake functions are ready to use, no additional setting is required.

×	Oor Close DC Brake Time when Startup												
	Control mode	VF VFP	G SVC	FOCPG	FOCPM		Factory setting: 0.0						
	Settings 0.0~60.0sec												
	This parameter determines the duration of the DC Brake current after a RUN command.												
×	05.23	Door Clo	se DC I	Brake Ti	me when	Stopping							
	Control mode	VF VFP	G SVC	FOCPG	FOCPM	VF	Factory setting: 0.0						
		Settings	0.0~60.0	sec									
	This parameter determines the duration of the DC Brake current during braking.												

passenger's safety.

✓ ☐ 5.2 ℃ Door Close DC Brake Starting Frequency	
Control mode VF VFPG SVC FOCPG	Factory setting: 0.00
Settings 0.00~120.00Hz	
During the period AC motor drive decelerating to stop, this parameter sets	s the DC brake starting
frequency If Pr.05-24 is lower than Pr.01-09 (starting frequency), DC brak	e will regards lowest frequency
as starting frequency.	
09.25 Door Re-open Current Level 1	
Control mode VF VFPG SVC FOCPG FOCPM VF	Factory setting: 100.0
Settings 0.0~150.0% (AC drive's rated current)	
Moor Re-open Current Level 1 for Acceleration Area	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 150
Settings 100~200% (100% is Pr.05-25 setting)	
Door Re-open Current Level 1 for Low Speed Area	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 100.0
Settings 0.0~150.0%(Drive's rated current)	
Pr.05-25~05-27 is setting for door open/close curve set 1. When one of M	1I (Pr.02-01~02-05) is set to 25,
door open/close curve switch to 2nd set.	
09.28 Door Re-open Current Level 2	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 100.0
Settings 0.0~150.0%(Drive's rated current)	
M 35.23 Door Re-open Current Level 2 for Acceleration Area	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 150
Settings 0.0~150.0% (Drive's rated current)	
Door Re-open Current Level 2 for Low Speed Area	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 100
Settings $100 \sim 200\% (100\% \text{ is the setting in Pr.05-29})$	
Pr.05-28~05-30 is setting for door open/close curve set 2. When one of M	II (P1.02-01~02-05) IS Set to 25,
door open/close curve switch to 2nd set.	
✓ 853 ↓ Door Re-open Low Speed Boundary	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 2.0
Settings 1.0~99.0%(Total door width=100%; range between 0% speed detection area)	~Pr.05.31 is excluded from low
✓ 3532 Door Re-open Acceleration Boundary	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 70.0
Settings 8.0~97.0% (Total door width =100%; range bet acceleration area)	ween Pr.05.32~100% is the
During the door close, it will re-close from the open complete position to t	he close complete position
when there is an obstacle (the stall current exceeds Pr. 05.25/05.26/05.28	3/05.29). Door close command
will be ignored when the drive is perform re-opening and will be valid aga	in after door completely open is
reached.	
Pr.05-33 sets the time for decelerating to 0 Hz when door close error occ	urs. It is recommended to set a
minimum value less than the current limit in order for door to re-open in s	


Larger current is required at the beginning of door open and door close, so it needs to have larger re-open current level in the acceleration area. Please refer to the following figure for setting reopen current and acceleration area:

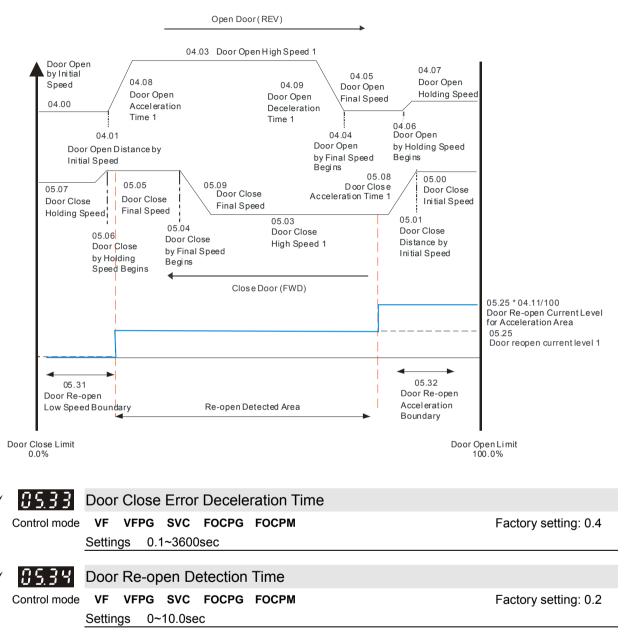

06 Protection and Special Parameters


✓ This parameter can be set during operation.

	•							
×	86.88	Softwa	re B	raking	g Level			
	Control mode	VF V	FPG	SVC	FOCPG	FOCPM		Factory setting: 380.0
		Settings	35	50.0~45	50.0Vdc			
	🕮 This pa	rameter	sets t	he soft	ware brak	ing level,	please refer to the DC voltage ran	ge on DC bus as
	referen	ce.						
×	06.01	ED Se	tting	of Bra	ake Res	istor		
	Control mode	VF V	FPG	SVC	FOCPG	FOCPM		Factory setting: 50
		Settings	0~	-100%				
×	50.80	Curren	t Bo	undar	у			
	Control mode				FOCPG	FOCPM		Factory setting: 200
		Settings	0~	-250%				
	🕮 This pa	rameter	sets t	he max	kimum ou	tput currei	nt of AC drive.	
×	86.83	Forwar	d M	otor To	orque Li	mit		
	Control mode				FOCPG	FOCPM		Factory setting: 200
		Settings	0~	-250%				
×	06.04	Forwar	dR	egene	rative To	orque Lii	mit	
	Control mode				FOCPG	FOCPM		Factory setting: 200
		Settings	0~	-250%				
×	06.05	Revers	se M	otor To	orque Li	mit		
	Control mode				FOCPG	FOCPM		Factory setting: 200
		Settings	0~	-250%				
×	06.06	Revers	se R	egene	rative To	orque Li	mit	
	Control mode				FOCPG	FOCPM		Factory setting: 200
		Settings	0~	-250%				
	📖 Motor r	ated torq	ue is	100%.	The diag	ram below	v refers to the torque limit setting ir	Pr.06-03 to Pr.06-06.

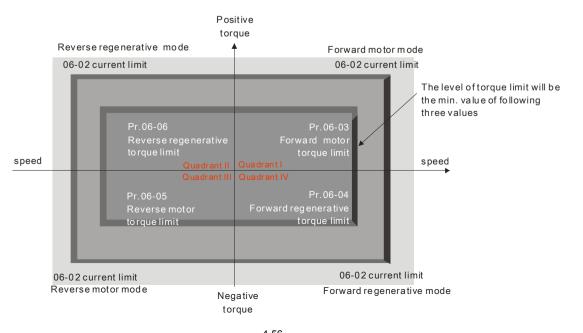

	Emorgor	ov/Foro	o Stop F	Deceloration Mathed	
	•	•	•	Deceleration Method	Faster (asting)
Control mode		PG SVC		FOCPM	Factory setting: 3
	Settings	0:Coast t	•		
				st decel. time	
				nd decel. time	
		-	5.33 setti	-	
	multi-functio e as the sett	•		I) is set to 09 or 11, this param	eter is active and the drive will
06.08	Low Volta	age Lev	el		
Control mode	VF VFP Settings	PG SVC 160.0~27		FOCPM	Factory setting: 180.0
06.09	High Ten	nperatur	e Overh	eat Warning (OH)	
Control mode	• VF VFP Settings	PG SVC 0.0~110.0		FOCPM	Factory setting: 85.0
	Settings	0.0**110.	00		
86.78	Action af	iter door	re-oper	n/re-close	
Control mode	VF VFP	PG SVC	FOCPG	FOCPM	Factory setting: 2
	Settings	Bit0=0: D	isable to	detect the incorrect open/close	limit function
		Bit0=1: E	nable to	detect the incorrect open/close	limit function
		Bit1=0: E	nable to i	re-open when door close error	
		Bit1=1: D	isable to	re-open when door close error	
				re-open when door close error Curve when re-open	
		Bit2=0: E	nable S-0	-	
		Bit2=0: E Bit2=1: D	Enable S-(Disable S-	Curve when re-open	

- When Bit 0=1, if the drive is in distance control mode, it is able to detect the door open/close error; in addition, when MO(multi-function output terminal) is set to 8, the drive will output door open/close error warning.
- In Distance Control Mode, the detection method for the incorrect door open/close limit is shown as follows.

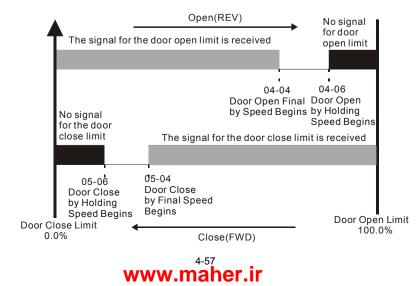

1. Incorrect door close limit:

a. The signal for the door open limit is received before Pr.05-04 setting.

- b. The signal for the door open limit isn't received after Pr.05-06setting.
- 2. Incorrect door open limit:
 - a. The signal for the door close limit is received before Pr.04-04 setting.
 - b. The signal for the door close limit isn't received after Pr.04-06 setting.
- When bit 1=1, the drive will not re-open the door when it detects a door closing torque higher than Pr.05-25 (05-28).
- When bit 3=1 and the drive is in torque holding status after door open completely, the door width is

auto-reset to 100.0%.

×	86.11	Posit	ion Co	ontrol I	Vode			
	Control mode	VF	VFPG	SVC	FOCPG	FOCPM		Factory setting: 0
		Setting	1: 2:	Door o Door cl	pen limit lose limit	signal on	ly, door open by PG	ent level. humber or current level detection. number or current level detection.

- 4: Detect by PG number and also accept external door open/close limit signal5: No limit signal, detect by PG number and current level. (For Pr.00-09=3 speed control mode)
- When Pr.06-11 setting is 1 to 5 and Pr. 06-12 is NOT set to 0, the AC drive will regard this setting as open/close complete position if following two conditions are met:

A. It has open/close limit signal.

- B. When the stall current level exceeds Pr.06-12.
- When this parameter is set to 0 "No limit signal", the door open/close complete position can be check by following two methods:.
 - A. When Pr. 06-12 is set to 0: When PG feedback frequency is almost 0 due to motor stall, it is regarded as open/close complete position.
 - B. When Pr. 06-12 is NOT set to 0: When current exceeds this level due to motor stall, it is regarded as open/close complete position.

- 1. It is recommended to use method B for the transmission mechanism skids easily.
- This function works in distance control mode only. For multi-step control mode, please use door open/close limit signal to verify if door reaches its open/close complete position.

×	86.72	Stall Current Level of Position Mode				
	Control mode	VF VI	FPG SVC	FOCPG	FOCPM	Factory setting: 30.0
		Settings	0.0~200.	0% (AC d	Irive's rated current)	

This parameter sets the stall current level for open/close complete position and is to be used with Pr.06-11.

×	86.13	Door Open/Close Holding Time Before Next Demo
---	-------	---

Control mode VF VFPG SVC FOCPG FOCPM Settings 0.0~99.99sec Factory setting: 2.0

During demonstration in demo mode, this parameter sets the door holding time before it goes on to the next demonstration.

		J- I				
× 86.14	Times of Door Opened/Closed in Demo Mode (L)					
Control mode	e VF VFPG SVC FOCPG FOCPM	Factory setting: 0				
	Settings 0~9999					
× 88.45	Times of Door Opened/Closed in Demo Mode (H)					
Control mode	e VF VFPG SVC FOCPG FOCPM	Factory setting: 0				
	Settings 0~9999					
📖 When	executing demo mode, it records the number of times the door opened or	closed. It counts as one				
when	door action from open to close.					
	·					
× <u>86</u> 38	Clear Demo Mode Door Open/Close Record					
Control mode		Factory setting: 0				
	Settings 0: Disable					
	1: Clear (Pr.06.14 and Pr.06.15)					
🚇 When	Pr.06-16 is set to 1, door open/close counting will be cleared and reset to	0.				
× 88.17	Present Fault Record					
× 86.18	2nd Most Recent Fault Record					
	3rd Most Recent Fault Record					
/ <u>00.CU</u>	4th Most Recent Fault Record					
~ <u>86.2 i</u>	5th Most Recent Fault Record					
× 85.22	6 th Sixth Most Recent Fault Record					
Control mode	e VF VFPG SVC FOCPG FOCPM	Factory setting: 00				
	Settings 0: No fault					
	1: Over-current during acceleration (ocA)					
	2: Over-current during deceleration (ocd)3: Over-current during steady speed (ocn)					
	4: Reserved					
	5: Reserved					
	6:Over-current at stop (ocS)					
	7:Over voltage during acceleration (ovA) 8 Over voltage during deceleration (ovd)					
	9:Over voltage during steady speed (ovn)					
	10:Over voltage at stop (ovS)					
	11:Low voltage during acceleration (LvA)					
	12:Low voltage during deceleration (Lvd)					
	13:Low voltage during steady speed (Lvn) 14:Low voltage at stop (LvS)					
	15:Phase loss protection (PHL)					
	16:IGBT overheat (oH1)					
	17: Reserved					
	18:IGBT overheat protection circuit error (tH1o) 19~20: Reserved					
	21: 150% 1Min, AC drive overload (oL)					
	22:Motor overload (EoL1)					
	23~29: Reserved					
	30: Memory write-in error (cF1)					
	31: Memory read-out error (cF2)32: Isum current detection error (cd0)					
	33 U-phase current detection error (cd1)					
	34 V-phase current detection error (cd2)					
	35 W-phase current detection error (cd3)					
	Clamp current detection error (Hd0)					
	37 Over-current detection error (Hd1)					
	www.maher.ir					

- 38 Over-voltage detection error (Hd2) 39 Ground current detection error (Hd3) 40 Auto tuning error (AuE) 41: Reserved 42: PG feedback error (PGF1) 43 PG feedback loss (PGF2) 44 PG feedback stall (PGF3) 45 PG slip error (PGF4) 46~48: Reserved 49:External fault signal input 50~51: Reserved 52:Password error (PcodE) 53:Software error (ccodE) 54:Communication time-out (cE1) 55: Communication time-out (cE2) 56: Communication time-out (cE3) 57: Communication time-out (cE4) 58 Communication time-out (cE10) 59:PU time-out (cP10) 60: Brake chopper error (bF) 61~67: Reserved 68: Door open/close complete signal error 69:Door open time-out (DOT)
- The drive is forced to stop each time fault occurs and will be recorded. When fault occurs at STOP status, LV warning will be given but will not be recorded. When fault occurs at RUN, LV error will be given and will be recorded.

15.23 Electronic Thermal Overload Relay Selection

Control mode VF VFPG SVC FOCPG FOCPM

Factory setting: 2

- Settings 0: Special motor for AC drive 1: Standard motor
 - 2: Disable
- This parameter sets the boundary of the drive's output power. This function is used to protect the motor from overloading or overheating when it operates in low speed.


✓ 3824 Electronic Thermal Characteristic

Control mode VF VFPG SVC FOCPG FOCPM

Factory setting: 60.0

Settings 30.0~600.0sec

The parameter determines the time required for activating the electronic thermal protection function. The protection function regards to the drive's output frequency, current and operation time. The graph below shows the curves for 150% output power in a time limit set in Pr.06-23.



✓ 05.25 Auto Restart After Fault	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 0
Settings 0~10	
After fault occurs (oc and ov), the AC motor drive can be reset/restarted a	utomatically up to 10 times.
Setting this parameter to 0 will disable the reset/restart operation after any	y fault has occurred. When
enabled, the AC motor drive will restart with speed search, which starts at	t the frequency before the fault.
If the drive execute reset/restart after fault more than the numbers of time	set in Pr.06-25 and the limit is
reached within the time period in Pr.06-26, the drive will stop execute rese	et/restart after fault function.
User will need to input RESET manually for the drive to continue operatio	n.
✓ 35.25 Auto Reset Time for Restart after Fault	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 60.0
Settings 0.1~600.0sec	
M When a react/restart offer fault essure the drive will regarde Dr OG	OC as a time houndary and

When a reset/restart after fault occurs, the drive will regards Pr.06-26 as a time boundary and begin counting the numbers of faults occur within this time period. Within the period, if numbers of faults occurred did not exceed the setting in Pr.06-25, the counting will be cleared and starts from 0 when next fault occurs.


07 Control Parameters


✓ This parameter can be set during operation.

×	07.00	ASR (Auto Speed Regulation) Control (F	P) of Zero Speed
	Control mode	VF VFPG SVC FOCPG FOCPM Settings 0.0~500.0%	Factory setting: 1.5
×	0701	ASR (Auto Speed Regulation) Control (I) of Zero Speed
	Control mode	VF VFPG SVC FOCPG FOCPM Settings 0.000~10.000sec	Factory setting: 0.050
×	8782	ASR (Auto Speed Regulation) Control (F	²) 1
	Control mode	VF VFPG SVC FOCPG FOCPM Settings 0.0~500.0%	Factory setting: 1.5
×	07.03	ASR (Auto Speed Regulation) Control (I) 1
	Control mode	VF VFPG SVC FOCPG FOCPM Settings 0.000~10.000sec	Factory setting: 0.050
×	07.04	ASR (Auto Speed Regulation) Control (F	?) 2
	Control mode	VF VFPG SVC FOCPG FOCPM Settings 0.0~500.0%	Factory setting: 3.0
×	07.05	ASR (Auto Speed Regulation) Control (I) 2
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 0.100
		Settings 0.000~10.000sec	
×	0706	ASR 1/ASR2 Switch Frequency	
	Control mode	VF VFPG SVC FOCPG FOCPM	Factory setting: 2.00
	~	Settings 0.00~120.00Hz (0: disable)	


ASR P determines Proportional control and associated gain (P). ASR I determines integral control and associated gain (I).

When integral time is set to 0, it is disabled. Pr.07-06 defines the switch frequency for ASR1 (Pr.07-02, 07-03) and ASR2 (Pr.07-04, Pr.07-05).






Description: This parameter defines the filter time of the ASR command.

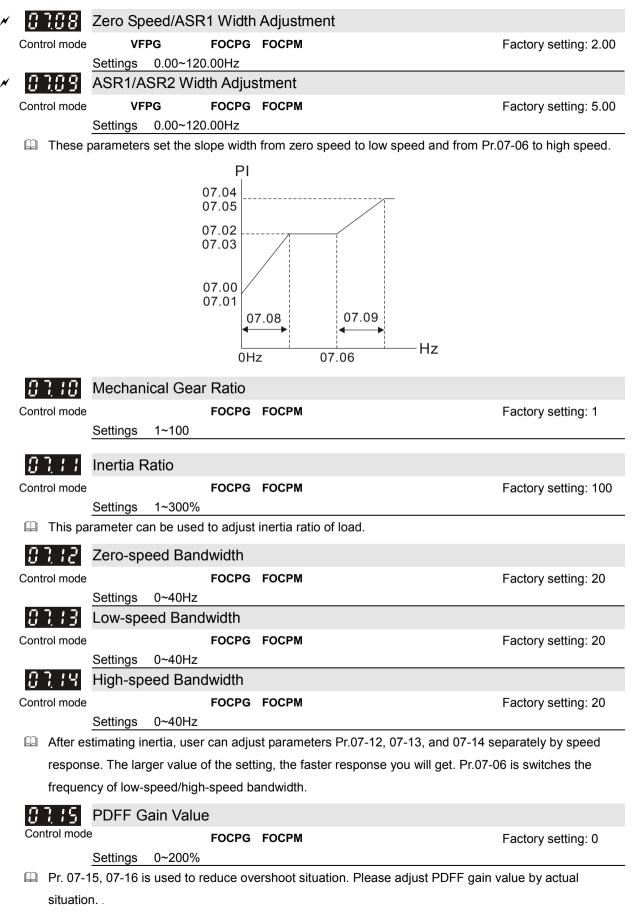

Besides traditional PI control, it also provides PDFF function to reduce overshoot for speed control.

- 1. Get system inertia
- 2. Adjust Pr.07-15 and 07-16 (When larger number is set, the suppressed overshoot function will be better. But it needs to be used with the actual condition)



B 15 Gain for	r Speed Feed Forward	
Control mode	FOCPG FOCPM	Factory setting: 0
Settings	0~500	

08	Multi-s	tep Speed Parameter	✓ This parameter can be set during operation.		
×	08.00	Zero Step Speed Frequency			
×	08.0 /	1 st Step Speed Frequency			
×	88.82	2 nd Step Speed Frequency			
×	08.03	3 rd Step Speed Frequency			
×	<u>88.84</u>	4 th Step Speed Frequency			
×	08.05	5 th Step Speed Frequency			
×	08.08	6 th Step Speed Frequency			
×	08.07	7 th Step Speed Frequency			
×	08.08	8 th Step Speed Frequency			
×	08.09	9 th Step Speed Frequency			
×	88.48	10 th Step Speed Frequency			
×	88.11	38 / / 11 th Step Speed Frequency			
×	88.72	12 th Step Speed Frequency			
×	88.13	13 th Step Speed Frequency			
×	88.14	14 th Step Speed Frequency			
×	88.45	15 th Step Speed Frequency			
	Control mode	Settings 0.00~120.00Hz	Factory setting: 0.00		
	📖 The Mi	ulti-Function Input Terminals (refer to Pr.02-01 to 0	02-05) are used to select one of the AC motor		

drive Multi-step speeds. The speeds (frequencies) are determined by Pr.08-00 to 08-15 as shown above.

09 Communication Parameters

✓ This parameter can be set during operation.

6 ←1 Serial interface 1: +EV 2: GND 3: SG- RS-485 4: SG+ 5: NC 6: NC	D8500,
Communication Address	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 1
Settings 01~254	uningtion address for this
If the AC motor drive is controlled by RS-485 serial communication, the communication drive must be set via this parameter. And the communication address for each	
different and unique.	
CONTRACT Transmission Speed	
Control mode VF VFPG SVC FOCPG FOCPM Settings 4.8~115.2Kbps	Factory setting: 19.2
\square This parameter is used to set the transmission speed between the RS485 mast	er (PLC, PC, etc.) and AC
motor drive. RS-485 communication can also be used to change the drive's pa	rameter and control the
drive's operation status.	
3992 Transmission Fault Treatment	
Control mode VF VFPG SVC FOCPG FOCPM	Factory setting: 3
Settings Warn and keep operating Warn and RAMP to stop Reserved No action and no display	
This parameter is used to set the reaction to transmission errors occur.	
✓	
Control mode VF VFPG SVC FOCPG FOCPM Settings 0.0~100.0sec	Factory setting: 0.0
\square This parameter is used to set the duration of communication and keypad time-	out.
✓ <u>3334</u> Communication Protocol	
Control mode VF VFPG SVC FOCPG FOCPM Settings 0: 7N1 (ASCII) 1: 7N2 (ASCII) 2: 7E1 (ASCII) 3: 7O1 (ASCII) 4: 7E2 (ASCII) 5: 7O2 (ASCII) 6: 8N1 (ASCII) 7: 8N2 (ASCII) 8: 8E1 (ASCII) 9: 8O1 (ASCII) 10: 8E2 (ASCII) 11: 8O2 (ASCII) 12: 8N1 (RTU) 13: 8N2 (RTU) 4-66	Factory setting: 13
www.maher.ir	

14: 8E1 (RTU)
15: 801 (RTU)
16: 8E2 (RTU)
17: 802 (RTU)

1. Control by PC or PLC

★A VFD-VL can be set up to communicate on Modbus networks using one of the following modes: ASCII (American Standard Code for Information Interchange) or RTU (Remote Terminal Unit). Users can select the desired mode along with the serial port communication protocol in Pr.09-04.

★Code Description:


ASCII mode:

Each 8-bit data is the combination of two ASCII characters. For example, a 1-byte data: 64 Hex, shown as '64' in ASCII, consists of '6' (36Hex) and '4' (34Hex).


Character	'0'	'1'	'2'	'3'	'4'	'5'	'6'	'7'
ASCII code	30H	31H	32H	33H	34H	35H	36H	37H
Character	'8'	ʻ9'	'A'	'B'	'C'	'D'	'E'	'F'
ASCII code	38H	39H	41H	42H	43H	44H	45H	46H

2. Data Format

10-bit character frame (For ASCII):

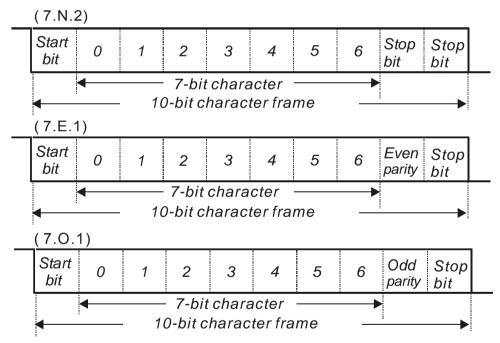

11-bit character frame (For RTU):

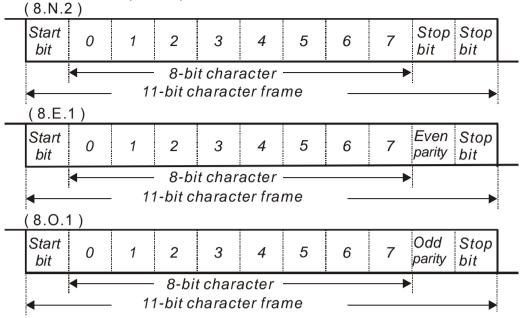

3.1 Communication Protocol

Communication Data Frame:

ASCII mode:

Start character ':' (3AH)
Communication address:
8-bit address consists of 2 ASCII codes
Command code:
8-bit command consists of 2 ASCII codes
Contents of data:
Nx8-bit data consist of 2n ASCII codes
n<=16, maximum of 32 ASCII codes
LRC check sum:
8-bit check sum consists of 2 ASCII codes
End characters:
END1= CR (0DH), END0= LF(0AH)

RTU mode:

START	A silent interval of more than 10 ms
Address	Communication address: 8-bit address
Function	Command code: 8-bit command
DATA (n-1)	Contents of data:
	$-n \times 8$ -bit data, n<=16
DATA 0	
CRC CHK Low	CRC check sum:
CRC CHK High	16-bit check sum consists of 2 8-bit characters
END	A silent interval of more than 10 ms

3.2 Address (Communication Address)

Valid communication addresses are in the range of 0 to 254. A communication address equal to 0, means broadcast to all AC drives (AMD). In this case, the AMD will not reply any message to the master device.

00H: broadcast to all AC drives

01H: AC drive of address 01

0FH: AC drive of address 15

10H: AC drive of address 16

:

FEH: AC drive of address 254

For example, communication to AMD with address 16 decimal (10H):

ASCII mode: Address='1','0' => '1'=31H, '0'=30H

RTU mode: Address=10H

3.3 Function (Function code) and DATA (data characters)

The format of data characters depends on the function code.

03H: read data from register

06H: write single register

Example: reading continuous 2 data from register address 2102H, AMD address is 01H. ASCII mode:

Command message:		Response message:	
STX	·	STX	(.)
Address	ʻ0'	Address	ʻ0'
Address	'1'	Address	<u>'1'</u>
Function	·0'	Function	·0'
	'3'		'3'
	'2'	Number of data	·0'
Starting address	'1'	(count by byte)	'4'
	·0'		'1'
	'2'	Content of starting	'7'
	·0'	address 2102H	'7'
Number of data	·0'		ʻ0'
(count by word)	·0'		ʻ0'
	'2'	Content of address 2103H	·0'
LRC Check	'D'		·0'
EIKO OHCEK	'7'		ʻ0'
END	CR	LRC Check	'7'
	LF		'1'
		END	CR
			LF

RTU mode:

Command message:		Response message:		
Address	01H	Address	01H	
Function	03H	Function	03H	
Starting data address	21H 02H	Number of data (count by byte)	04H	
Number of data	00H	Content of data	17H	
(count by world)	02H	address 2102H	70H	
CRC CHK Low	6FH	Content of data	00H	
CRC CHK High	F7H	address 2103H	00H	
		CRC CHK Low	FEH	
		CRC CHK High	5CH	

06H: single write, write single data to register.

Example: writing data 6000(1770H) to register 0100H. AMD address is 01H.

ASCII mode:

Command message:		Response message:	
STX	(.)	STX	·' ·
Address	·0'	Address	·0'
Address	'1 '	Address	'1'
Function	·0'	Function	·0'
T UNCTON	'6'	1 difetion	'6'
	·0'		·0'
Data address	'1'	Data address	'1'
	·0'	Data address	.0'
	·0'		·0'
	'1'	Data content	
Data content	'7'		'7'
Data content	'7'		'7'
	·0'		·0'
LRC Check	'7'	LRC Check	·7'
ERG Officer	'1'	EROOREER	'1'
END	CR	END	CR
LIND	LF		LF

RTU mode:

Command message:		Response message:	
Address	01H	Address	01H
Function	06H	Function	06H
Data address	01H	Data address	01H
Data address	00H	Data address	00H
Data content	17H	Data content	17H
Data content	70H	Data content	70H
CRC CHK Low	86H	CRC CHK Low	86H
CRC CHK High	22H	CRC CHK High	22H

10H: write multiple registers (write multiple data to registers)

Example: Set the multi-step speed,

Pr.04-00=50.00 (1388H), Pr.04-01=40.00 (0FA0H). AC drive address is 01H.

ASCII Mode:

Command messa	age:	Response mess	age:
STX	·	STX	(.)
ADR 1	ʻ0'	ADR 1	ʻ0'
ADR 0	'1'	ADR 0	'1'
CMD 1	'1'	CMD 1	'1'
CMD 0	ʻ0'	CMD 0	ʻ0'
	ʻ0'		ʻ0'
Starting data address	'5'	Starting data address	' 5'
Starting data address	ʻ0'	Starting data address	ʻ0'
	ʻ0'	Γ	ʻ0'
	ʻ0'		ʻ0'
Number of data	ʻ0'	Number of data	ʻ0'
(count by word)	ʻ0'	(count by word)	·0'
	'2'	Γ	'2'
Number of data	·0'	LRC Check	'E'
(count by byte)	'4'		'8'
	'1'	END	CR
The first data content	'3'		LF
	'8'	· · · · ·	
	'8'		
The second data content	ʻ0'		
	'F'		



	'A'
	·0'
LRC Check	·9'
	'A'
END	CR
END	LF

RTU mode:

Command mes	Respo	
ADR	01H	ADR
CMD1	10H	CMD 1
Starting data address	05H 00H	Starting data add
Number of data	00H	Number of dat
(count by word)	02H	(count by word
Number of data (count by byte)	04	CRC Check Lo
The first data content	13H 88H	CRC Check Hi
The second data content	0FH	
The second data content	A0H	
CRC Check Low	·9'	
CRC Check High	ʻA'	

Response message:				
ADR	01H			
CMD 1	10H			
Starting data address	05H			
Starting data address	00H			
Number of data	00H			
(count by word)	02H			
CRC Check Low	41H			
CRC Check High	04H			

Check sum

ASCII mode:

LRC (Longitudinal Redundancy Check) is calculated by summing up, module 256 and the values of the bytes from ADR1 to last data character then calculating the hexadecimal representation of the 2's-complement negation of the sum.

For example,

01H+03H+21H+02H+00H+02H=29H, the 2's-complement negation of 29H is D7H.

RTU mode:

CRC (Cyclical Redundancy Check) is calculated by the following steps:

Step 1: Load a 16-bit register (called CRC register) with FFFFH.

Step 2: Exclusive OR the first 8-bit byte of the command message with the low order byte of the 16-bit CRC register, putting the result in the CRC register.

Step 3: Examine the LSB of CRC register.

Step 4: If the LSB of CRC register is 0, shift the CRC register one bit to the right with MSB zero filling, then repeat step 3. If the LSB of CRC register is 1, shift the CRC register one bit to the right with MSB zero filling, Exclusive OR the CRC register with the polynomial value A001H, then repeat step 3.

Step 5: Repeat step 3 and 4 until eight shifts have been performed. When this is done, a complete 8-bit byte will have been processed.

Step 6: Repeat step 2 to 5 for the next 8-bit byte of the command message. Continue doing this until all bytes have been processed. The final contents of the CRC register are the CRC value. When transmitting the CRC value in the message, the upper and lower bytes of the CRC value must be swapped, i.e. the lower order byte will be transmitted first.

```
The following is an example of CRC generation using C language. The function takes two arguments:
```

Unsigned char* data ← a pointer to the message buffer

Unsigned char length ← the quantity of bytes in the message buffer

The function returns the CRC value as a type of unsigned integer.

Unsigned int crc_chk(unsigned char* data, unsigned char length)

```
{
    int j;
    unsigned int reg_crc=0Xffff;
    while (length--){
        reg_crc ^= *data++;
        for(j=0;j<8;j++){
            if(reg_crc & 0x01){ /* LSB(b0)=1 */
               reg_crc=(reg_crc>>1) ^ 0Xa001;
        }else{
            reg_crc=reg_crc >>1;
        }
    }
}
```

return reg_crc;

// return register CRC

Address list

Content	Address	Function		
AC drive Parameters	GGnnH	GG means parameter group, nn means parameter number, for example, the address of Pr.04-01 is 0401H.		
Drive Command	2000H	Bit0~3	0: No function	
			1: Stop	
			2: Run	
			3: opening door is prohited	
		Bit4~5	00B: No function	
			01B: OD	
			10B: CD	
			11B: Change direction	
		Bit6~7	00B: 1st accel/decel	
			01B: 2nd accel/decel	
			10B: 3rd accel/decel	
			11B: 4th accel/decel	
		Bit08~11	000B: master speed	

		1	
			0001B: 1st accel/decel.
			0010B: 2nd accel/decel
			0011B: 3rd accel/decel
			0100B: 4th accel/decel
			0101B: 5th accel/decel
			0110B: 6th accel/decel
			0111B: 7th accel/decel
			1000B: 8th accel/decel
			1001B: 9th accel/decel
			1010B: 10th accel/decel
			1011B: 11th accel/decel
			1100B: 12th accel/decel
			1101B: 13th accel/decel
			1110B: 14th accel/decel
			1111B: 15th accel/decel
		Bit12	1: enable bit06-11 function
		Bit13~14	00B: No function
			01B: operated by digital keypad
			10B: operated by Pr.00-21 setting
			11B: change operation source
		Bit15	Reserved
	2001H	Frequency	
	2002H	Bit0	1: EF (external fault) on
	200211	Bit1	1: Reset
		Bit2	1: B.B. ON
		Bit3~5	Reserved
Statua monitor		DI13~5	Reserved
Status monitor Read only	2100H	Error code: refer to Pr.06-16 to Pr.06-21	
	2119H	Bit0	00: Stop
		Bit1	01: deceleration
		Bit2	opening door is prohited,
		Bit3	00: CD command, OD output
		Bit4	01: CD command, OD output
			10: OD command, CD output
			11: Reserved
			Reserved
		Bit5~7	
		Bit8	1: Master frequency Controlled by communication
			 Master frequency Controlled by communication interface Master frequency controlled by analog/external
		Bit8 Bit9	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal
		Bit8 Bit9 Bit10	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface
		Bit8 Bit9 Bit10 Bit11	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked
		Bit8 Bit9 Bit10 Bit11 Bit12	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked enable to copy parameter from keypad
		Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked enable to copy parameter from keypad Reserved
	2102H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked enable to copy parameter from keypad Reserved command (F)
	2103H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked enable to copy parameter from keypad Reserved command (F) uency (H)
	2103H 2104H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq Output curr	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked enable to copy parameter from keypad Reserved command (F) uency (H) ent (AXXX.X)
	2103H 2104H 2105H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq Output curr DC-BUS Vo	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked enable to copy parameter from keypad Reserved command (F) uency (H) ent (AXXX.X) bitage (UXXX.X)
	2103H 2104H 2105H 2106H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq Output curr DC-BUS Vo Output volta	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked enable to copy parameter from keypad Reserved command (F) uency (H) ent (AXXX.X) Ditage (UXXX.X)
	2103H 2104H 2105H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq Output curr DC-BUS Vo Output volta	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked enable to copy parameter from keypad Reserved command (F) uency (H) ent (AXXX.X) bitage (UXXX.X)
	2103H 2104H 2105H 2106H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq Output curr DC-BUS Vc Output volta Current ste	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked enable to copy parameter from keypad Reserved command (F) uency (H) ent (AXXX.X) Ditage (UXXX.X)
	2103H 2104H 2105H 2106H 2107H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq Output curr DC-BUS VC Output volta Current ste Multi-functio	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked enable to copy parameter from keypad Reserved command (F) uency (H) ent (AXXX.X) bltage (UXXX.X) age (EXXX.X) p number of Multi-Step Speed Operation
	2103H 2104H 2105H 2106H 2107H 2116H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq Output curr DC-BUS Vo Output volta Current ste Multi-functio Frequency	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked enable to copy parameter from keypad Reserved command (F) uency (H) ent (AXXX.X) bitage (UXXX.X) age (EXXX.X) p number of Multi-Step Speed Operation on display (Pr.00-04)
	2103H 2104H 2105H 2106H 2107H 2116H 2120H 2121H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq Output curr DC-BUS Vc Output volta Current ste Multi-functio Frequency Output freq	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked enable to copy parameter from keypad Reserved command (F) uency (H) ent (AXXX.X) bitage (UXXX.X) age (EXXX.X) p number of Multi-Step Speed Operation on display (Pr.00-04) command when malfunction uency when malfunction
	2103H 2104H 2105H 2106H 2107H 2116H 2120H 2121H 2122H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq Output volta Current ste Multi-functio Frequency Output freq Output curr	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked enable to copy parameter from keypad Reserved command (F) uency (H) ent (AXXX.X) bltage (UXXX.X) age (EXXX.X) p number of Multi-Step Speed Operation on display (Pr.00-04) command when malfunction uency when malfunction
	2103H 2104H 2105H 2106H 2107H 2116H 2120H 2121H 2122H 2122H 2123H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq Output volta Current ste Multi-functio Frequency Output freq Output curr Motor frequ	 Master frequency Controlled by communication interface Master frequency controlled by analog/external terminals signal Operation command controlled by communication interface Parameters have been locked enable to copy parameter from keypad Reserved command (F) uency (H) ent (AXXX.X) plage (UXXX.X) age (EXXX.X) p number of Multi-Step Speed Operation on display (Pr.00-04) command when malfunction uency when malfunction uency when malfunction
	2103H 2104H 2105H 2106H 2107H 2110H 2120H 2121H 2122H 2122H 2123H 2124H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq Output curr DC-BUS VC Output volta Current ste Multi-functio Frequency Output freq Output curr Motor frequ Output volta	1: Master frequency Controlled by communication interface 1: Master frequency controlled by analog/external terminals signal 1: Operation command controlled by communication interface 1: Parameters have been locked 1: enable to copy parameter from keypad Reserved command (F) uency (H) ent (AXXX.X) Ditage (UXXX.X) age (EXXX.X) p number of Multi-Step Speed Operation on display (Pr.00-04) command when malfunction uency when malfunction ent when malfunction ent when malfunction age when malfunction
	2103H 2104H 2105H 2106H 2107H 2116H 2120H 2121H 2122H 2122H 2123H 2124H 2125H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq Output curr DC-BUS VC Output volta Current ste Multi-functio Frequency Output freq Output curr Motor frequ Output volta DC-bus volta	1: Master frequency Controlled by communication interface 1: Master frequency controlled by analog/external terminals signal 1: Operation command controlled by communication interface 1: Parameters have been locked 1: enable to copy parameter from keypad Reserved command (F) uency (H) ent (AXXX.X) oltage (UXXX.X) age (EXXX.X) p number of Multi-Step Speed Operation on display (Pr.00-04) command when malfunction uency when malfunction ent when malfunction ency when malfunction age when malfunction tage when malfunction
	2103H 2104H 2105H 2106H 2107H 2116H 2120H 2121H 2122H 2122H 2123H 2124H 2125H 2126H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq Output curr DC-BUS VC Output volta Current ste Multi-functio Frequency Output freq Output curr Motor frequ Output volta DC-bus vol Output pow	1: Master frequency Controlled by communication interface 1: Master frequency controlled by analog/external terminals signal 1: Operation command controlled by communication interface 1: Parameters have been locked 1: enable to copy parameter from keypad Reserved command (F) uency (H) ent (AXXX.X) oltage (UXXX.X) age (EXXX.X) p number of Multi-Step Speed Operation on display (Pr.00-04) command when malfunction uency when malfunction ent when malfunction ent when malfunction age when malfunction tage when malfunction tage when malfunction ver when malfunction
	2103H 2104H 2105H 2106H 2107H 2116H 2120H 2121H 2122H 2122H 2123H 2124H 2125H	Bit8 Bit9 Bit10 Bit11 Bit12 Bit13~15 Frequency Output freq Output curr DC-BUS VC Output volta Current ste Multi-functia Frequency Output freq Output curr Motor frequ Output volta DC-bus vol Output pow Output torq	1: Master frequency Controlled by communication interface 1: Master frequency controlled by analog/external terminals signal 1: Operation command controlled by communication interface 1: Parameters have been locked 1: enable to copy parameter from keypad Reserved command (F) uency (H) ent (AXXX.X) oltage (UXXX.X) age (EXXX.X) p number of Multi-Step Speed Operation on display (Pr.00-04) command when malfunction uency when malfunction ent when malfunction ency when malfunction age when malfunction tage when malfunction

2129H	
	same as Pr.00-04=16)
212AH	Output status of multi-function terminal when malfunction (format is
	the same as Pr.00-04=17)
212BH	Drive status when malfunction (format is the same as 2119H)
2201H	Pr.00-04 user-defined setting
2203H	Reserved
2204H	Reserved
2205H	Reserved
2206H	Display temperature of IGBT (oC)
2207H	Reserved
2208H	Digital input state
2209H	Digital output state

Exception response:

The AC motor drive is expected to return a normal response after receiving command messages from the master device. The following depicts the conditions when no normal response is replied to the master device.

The AC motor drive does not receive the messages due to a communication error; thus, the AC motor drive has no response. The master device will eventually process a timeout condition.

The AC motor drive receives the messages without a communication error, but cannot handle them. An exception response will be returned to the master device and an error message "CExx" will be displayed on the keypad of AC motor drive. The xx of "CExx" is a decimal code equal to the exception code that is described below.


In the exception response, the most significant bit of the original command code is set to 1, and an exception code which explains the condition that caused the exception is returned.

Example:

ASCII mode:		RTU mode:	
STX	·	Address	01H
Address	·0'	Function	86H
Address	'1 '	Exception code	02H
Function	'8'	CRC CHK Low	C3H
1 difetion	'6'	CRC CHK High	A1H
Exception code	·0'		
	'2'		
LRC CHK	'7'		
ERCONK	'7'		
END	CR		
	LF		

The explanation of exception codes:

Exception code	Explanation		
1	Illegal data value: The data value received in the command message is not available for the AC drive.		
2	Illegal data address: The data address received in the command message is not available for the AC motor drive.		
3 Parameters are locked: parameters can't be changed			
4	Parameters can't be changed during operation		
10 Communication time-out.			



the following.
RS-485 BUS
PC or PLC command
Handling time
of the AC drive
Response Delay Time

10	User-de	Fined Parameters / This parameter can be set during operation.
N	10.00	Start-up Display Selection
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0003
×	10.0 1	Maximum Operation Frequency
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0131
×	10.02	Motor Rated Frequency
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0132
~	10.03	Motor Rated Voltage
~	Control mode	
	Control mode	Display address 0133
×	10.0 Y	2nd Output Frequency (Mid-point frequency)
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0134
×	1005	2nd Output Voltage (Mid-point voltage)
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0135
~	inne	3rd Output Frequency (Mid-point frequency)
~	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
	Control mode	Display address 0136
×		3rd Output Voltage (Mid-point voltage)
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0137
×	10.08	4th Output Frequency (Low Frequency)
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0138
N	1008	4th Output Voltage (Low Voltage)
,	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0139
		4-76

×	10.10	Door Open Acceleration Time 1
	Control mode	
		Display address 0408
×		Door Open Deceleration Time 1
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ## Display address 0409 5
×	10.12	Door Close Acceleration Time 2
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0508
~	נו הו	Door Close Deceleration Time 2
~	Control mode	
		Display address 0509
×	<u>10</u> 14	Frequency Testing
	Control mode	
		Display address 0015
×	18.15	Door Open Time by Initial Speed
	Control mode	
		Display address 0402
	10.15	
×	Control mode	Door Open by Initial Speed VF VFPG SVC FOCPG FOCPM Factory setting: #. ##
	Control mode	Display address 0400
		-F - 7
×	10,17	Door Open High Speed
	Control mode	
		Display address 0403
N	10.18	Door Open Final Speed
	Control mode	
		Display address 0405
×	10,19	Door Open Holding Torque Level
	Control mode	
		Display address 0410

N	1020	Door Open Holding Torque
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0411
N	10.2.1	Door Close High Speed
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0503
N	10.22	Door Close Final Speed
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0505
×	10.23	Door Close Holding Torque Level
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0510
×	10.2 Y	Door Close Holding Torque
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0511
×	10.25	Multi-function Input Terminal Direction
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0207
N	10.66	Multi-function Input 1
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0201
	1022	Multi-function Insut 0
×		Multi-function Input 2
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ## Display address 0202
		Display address 0202
~	1020	Multi-function Input 3
~	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
	Control mode	Display address 0203
		Display addites 0200
N	1020	Multi-function Input 4
	Control mode	VF VFPG SVC FOCPG TQCPG FOCPM Factory setting: #. ##
		Display address 0204


	338	Multi-	function	Outpu	ıt RY1			
	rol mode	VF	VFPG	SVC	FOCPG TQCF	G FOCPM	Factory setting: #. ##	
0011			y addres					
Multi-function Output RY2								
Cont	rol mode	VF	VFPG	SVC	FOCPG TQCF	G FOCPM	Factory setting: #. ##	
	Display address 0209							
10.00								
		View User-defined Parameters						
10.3 1								
Cont	rol mode	VF	VFPG	SVC	FOCPG TQCP	G FOCPM	Factory setting: #. ##	
		Setting	gs -					

This parameter group is open for users to define parameters from group 00 to group 09, it can saves 32 parameters. The saved value can also be the parameter addresses (but the hexadecimal value needs to be converted to decimal value).

B How to set user-defined parameter:

Example 1:


On the digital keypad, enter Pr.10.00 and the setting is 0800, after the setting is complete, Pr.11-00 will display the setting of Pr.08-00. Please follow the diagram below for using the digital keypad.

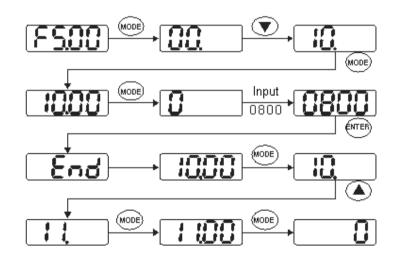

Example 2:

If it needs to enter the parameter address 2102H and 211BH by digital keypad, please follow the instruction shown on the diagram below.


The setting method of 2102H, please follow the steps shown in the diagram:

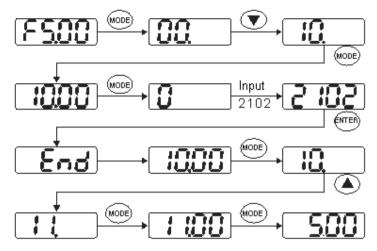

The setting method of 211BH

Convert 211BH (hexadecimal) into decimal value:

211B $1x16^{1}+11x16^{0}=16+11=27$ Enter 2127

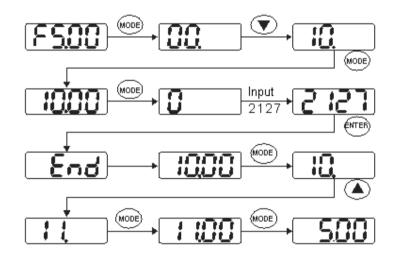

Please refer to the parameter groups shown in group 10.


Chapter 5 Troubleshooting

- 5-1 Over Current (OC)
- 5-2 Ground Fault (GFF)
- 5-3 Over Voltage (OV)
- 5-4 Low Voltage (Lv)
- 5-5 Over Heat (OH1)
- 5-6 Overload (OL)
- 5-7 Digital Display is Abnormal
- 5-8 Phase Loss (PHL)
- 5-9 Motor is not Running
- 5-10 Fail to Adjust Motor Speed
- 5-11 Motor Stalls During Acceleration
- 5-12 Motor Run Error
- 5-13 Electromagnetic/Induction Noise
- 5-14 Environmental Condition
- 5-15 Prevent Interference to other Devices





 \blacksquare It is crucial for technician to properly inspect the machine to prevent incidents.

5-1 Over Current (oc)

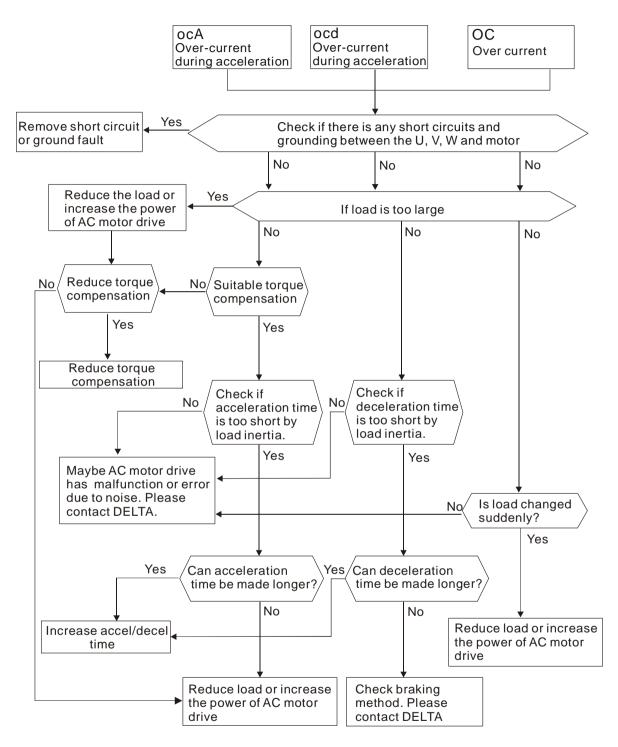


5-2 Ground Fault (GFF)

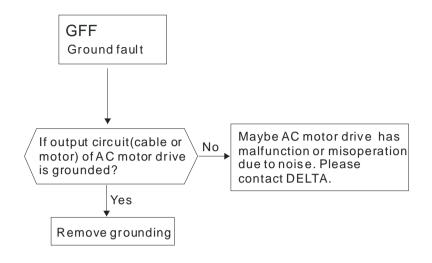


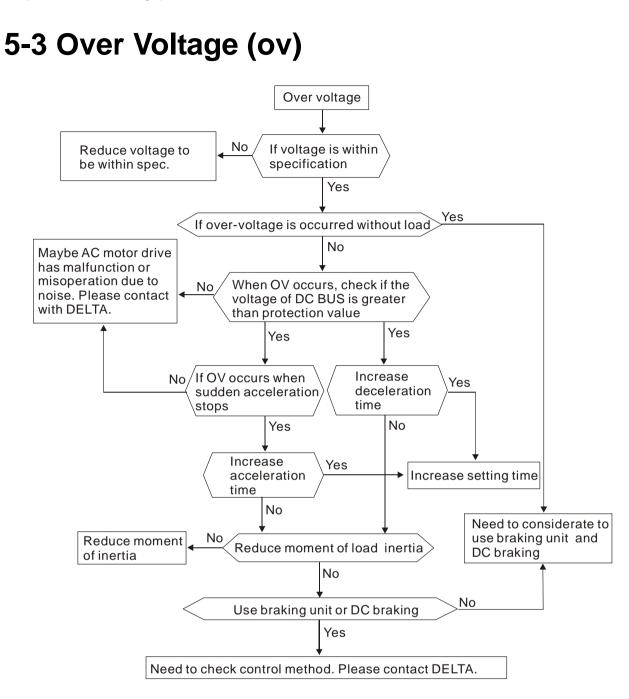


5-4 Low Voltage (Lv)

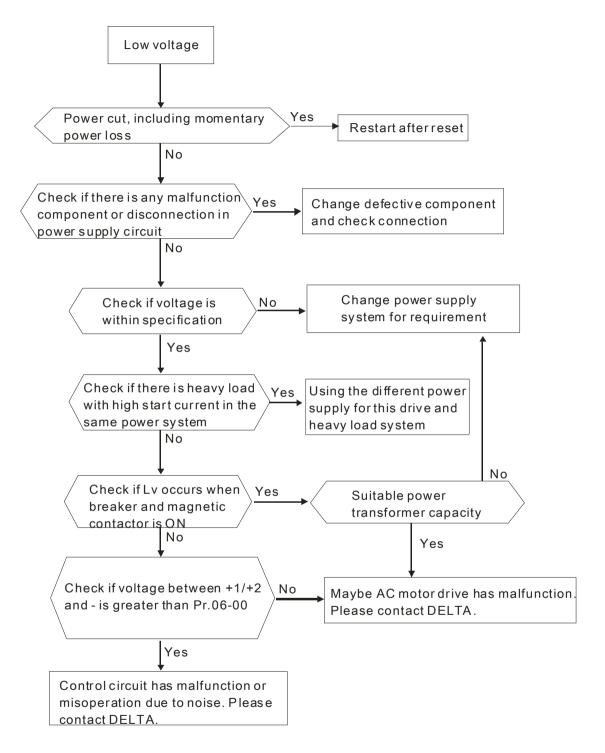


5-5 Over Heat (oH1)

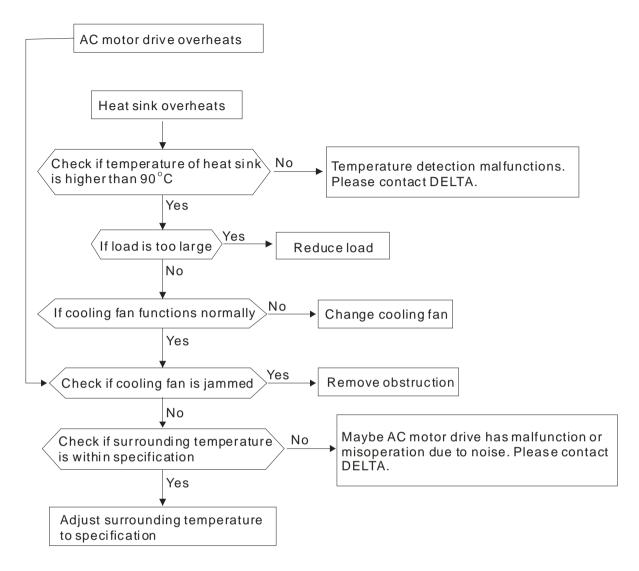


5-6 Overload (oL)

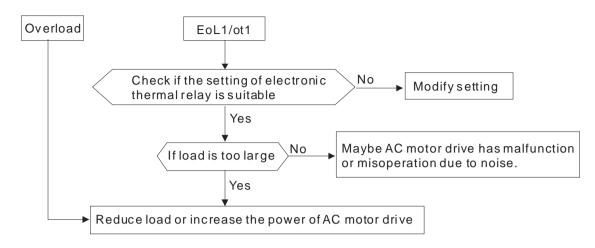


5-7 Digital Keypad Display is Abnormal

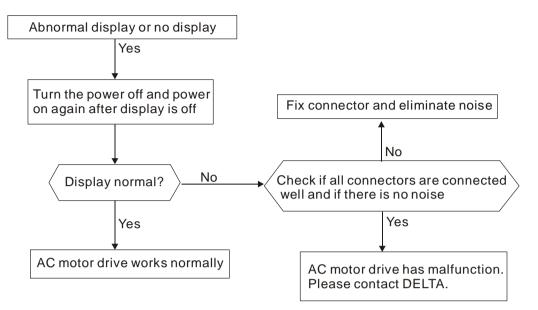


5-8 Phase Loss (PHL)

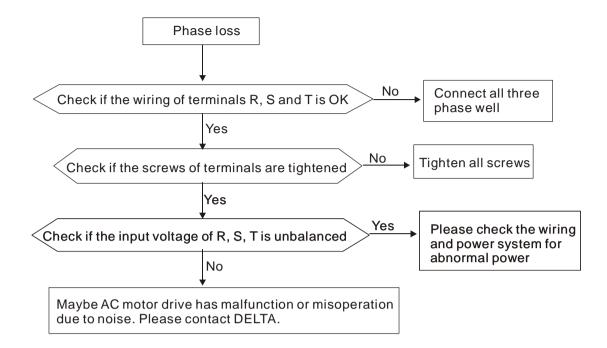


5-9 Motor is not Running

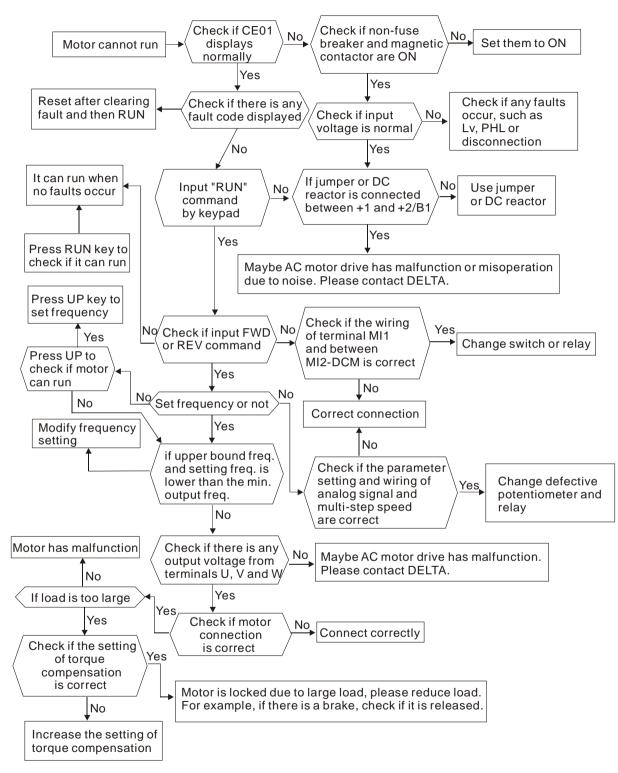


5-10 Fail to Adjust Motor Speed

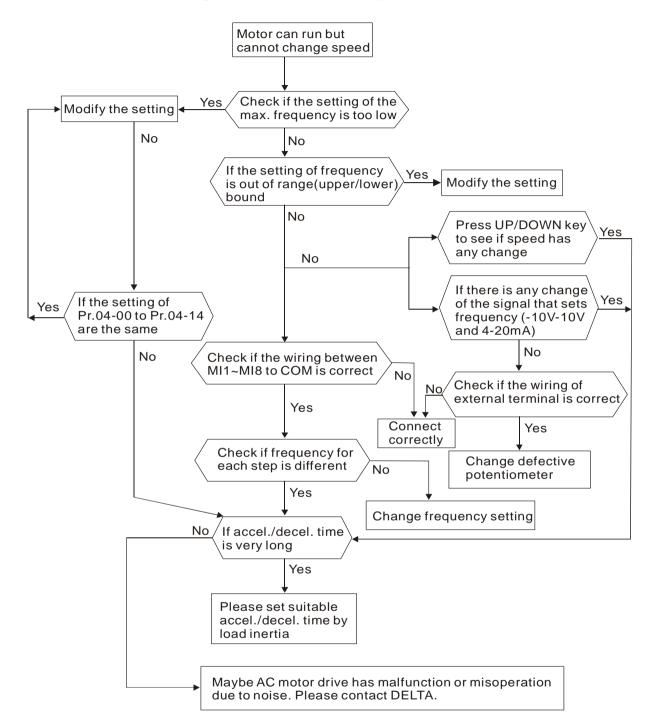

5-11 Motor Stalls during Acceleration

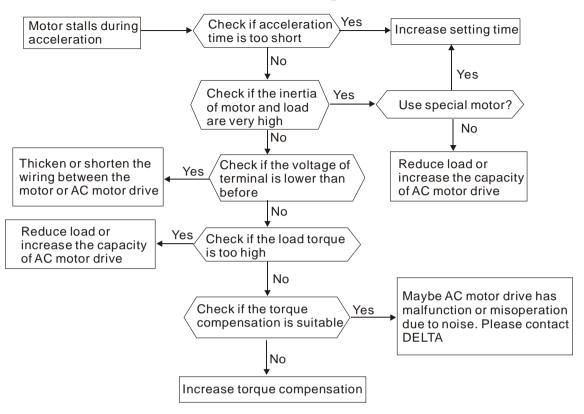

5-12 Motor Run Error

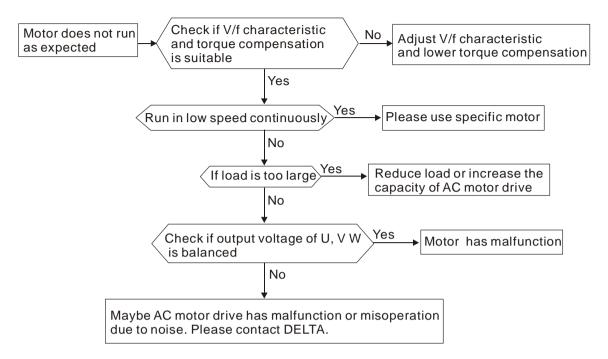

5-13 Electromagnetic/Induction Noise

There are many noises surround the AC motor drives and invade it by radiation or power circuit. It may cause the misoperation of control circuit and even damage the AC motor drive. Of course, that is a solution to increase the noise tolerance of AC motor drive. But it is not the best one due to the limit. Therefore, solve it from the outside as following will be the best.

- 1. Add surge killer on the relay or contact to suppress switching surge between ON/OFF.
- 2. Shorten the wiring length of the control circuit or serial circuit and separate from the main circuit wiring.
- 3. Comply with the wiring regulation for those shielded wire and use isolation amplifier for long wire.
- 4. The grounding terminal should comply with the local regulation and ground independently, i.e. not to have common ground with electric welding machine and power equipment.
- 5. Connect a noise filter at the input terminal of the AC motor drive to prevent noise from power circuit.

In a word, three-level solutions for electromagnetic noise are "no product", "no spread" and "no receive".

5.14 Environmental Condition

Since AC motor drive is an electronic device, you should comply with the environmental condition stated in the appendix A. Following are the remedial measures for necessary.

- 1. To prevent vibration, anti-vibration spacer is the last choice. The vibration tolerance must be within the specification. The vibration effect is equal to the mechanical stress and it cannot occur frequently, continuously or repeatedly to prevent damaging AC motor drive.
- Store in a clean and dry location free from corrosive fumes/dust to prevent rustiness, poor contact. It also may cause short by low insulation in a humid location. The solution is to use both paint and dust-proof. For particular occasion, use the enclosure with whole-seal structure.
- 3. The surrounding temperature should be within the specification. Too high or low temperature will affect the lifetime and reliability. For semiconductor components, damage will occur once any specification is out of range. Therefore, it is necessary to clean and periodical check for the air cleaner and cooling fan besides having cooler and sunshade. In additional, the microcomputer may not work in extreme low temperature and needs to have heater.
- 4. Store within a relative humidity range of 0% to 90% and non-condensing environment. Do not turn off the air conditioner and have exsiccator for it.


5.15 Prevent Interfere to Other Machines

AC motor drive may affect the operation of other machine due to many reasons. The solutions are as follows.

High Harmonic at Power Side

If there is high harmonic at power side during running, the improved methods are:

- 1. Separate power system: use transformer for AC motor drive.
- Use reactor at the power input terminal of AC motor drive or decrease high harmonic by multiple circuit.
- 3. If there is phase lead capacitor, it should use serial reactor to prevent capacitor damage from high harmonic.



Motor Temperature Rises

When the motor is induction motor with ventilation-cooling-type used in variety speed operation, bad cooling will happen in the low speed. Therefore, it may overheat. Besides, high harmonic is in output waveform to increase copper loss and iron loss. Following measures should be used by load situation and operation range when necessary.

- 1. Use the motor with independent power ventilation or increase the horsepower.
- 2. Use inverter duty motor.
- 3. Do NOT run in the low speed

Chapter 6 Fault Codes and Descriptions

6-1 Common Problems and Solutions

6-2 Maintenance and Inspectations

The AC motor drive has a comprehensive fault diagnostic system that includes several different alarms and fault messages. Once a fault is detected, the corresponding protective functions will be activated. The following faults are displayed as shown on the AC motor drive digital keypad display. The six most recent faults can be read from the digital keypad or communication.

The AC motor drive is made up by numerous components, such as electronic components, including IC, resistor, capacity, transistor, and cooling fan, relay, etc. These components can't be used permanently. They have limited-life even under normal operation. Preventive maintenance is required to operate this AC motor drive in its optimal condition, and to ensure a long life.

Basic check-up items to detect if there were any abnormalities during operation are:



- ☑ Wait 5 seconds after a fault has been cleared before performing reset via keypad of input terminal.
- ☑ Only qualified personnel can install, wire and maintain AC motor drives. Do not wear any metallic accessory such as watches or rings when installing the drives. Please use proper insulated tools only.
- ☑ Never reassemble internal components or wiring.
- ☑ Make sure that installation environment comply with regulations without abnormal noise, vibration and smell.

6-1 Common Problems and Solutions

Following fault name will only be displayed when using the digital keypad.

Display	Description	Corrective Actions
<u>oc</u> 8	Over-current during acceleration (Output current exceeds triple rated current during acceleration.)	 Short-circuit at motor output: Check for possible poor insulation at the output. Acceleration Time too short: Increase the Acceleration Time. AC motor drive output power is too small: Replace the AC motor drive with the next higher power model.
ocd	Over-current during deceleration (Output current exceeds triple rated current during deceleration.)	 Short-circuit at motor output: Check for possible poor insulation at the output. Deceleration Time too short: Increase the Deceleration Time. AC motor drive output power is too small: Replace the AC motor drive with the next higher power model.
000	Over-current during steady state operation (Output current exceeds triple rated current during constant speed.)	 Short-circuit at motor output: Check for possible poor insulation at the output. Check if motor is jammed. AC motor drive output power is too small: Replace the AC motor drive with the next higher power model.
000	Short-circuit is detected between upper bridge and lower bridge of the IGBT module	Return to the factory
<u>oc 5</u>	Hardware failure in current detection Over current occur at STOP	Return to the factory
<u>م</u> ں8	DC BUS over-voltage during acceleration (230V: DC 450V)	1. Check if the input voltage falls within the rated AC motor drive input voltage
oud	DC BUS over-voltage during deceleration (230V: DC 405V)	 range. Check for possible voltage transients. If DC BUS over-voltage due to
000	DC BUS over-voltage at constant speed (230V: DC 405V)	regenerative voltage, please increase the Deceleration Time or add an optional brake resistor.

Display	Description	Corrective Actions
005	Hardware failure in voltage detection	 Check if the input voltage falls within the rated AC motor drive input voltage range. Check for possible voltage transients.
Lu8	DC BUS voltage is less than Pr.06-00 during acceleration	 Check if the input voltage is normal Check for possible sudden load
Lud	DC BUS voltage is less than Pr.06-00 during deceleration	 Check if the input voltage is normal Check for possible sudden load
Lun	DC BUS voltage is less than Pr.06-00 in constant speed	 Check if the input voltage is normal Check for possible sudden load
605	DC BUS voltage is less than Pr.06-00 at stop	 Check if the input voltage is normal Check for possible sudden load
PHL	Phase Loss	Check Power Source Input if all 3 input phases are connected without loose contacts.
<mark>0</mark>	IGBT overheating IGBT temperature exceeds protection level 200~400W: 100℃	 Ensure that the ambient temperature falls within the specified temperature range. Make sure the ventilation holes are not obstructed and fan is spinning freely. AC motor drive should be placed in a good ventilation space.
oL	Overload The AC motor drive detects excessive drive output current. The drive can handle rated output current 150% for a maximum 60 seconds.	 Check if the motor is overloaded. Take the next higher power AC motor drive model.
	Motor 1 Overload	 Check if motor 1 is overloaded. Check the motor's rated current (Pr. 01-01 or 01-12). Increase motor capacity
د۶۱	Internal EEPROM can not be programmed.	Use the RESET key to reset all parameters to factory settings, if it does not work,
653	Internal EEPROM can not be read.	please return it to the factory.

Chapter 6 Fault Codes and Descriptions | DD Series

Display	Description	Corrective Actions
cdÛ	Hardware failure in current detection (Isum)	
cd i	U-phase error	Re-apply power and try again. If fault still
c d 2	V-phase error	occurs, please return it to the factory.
cd3	W-phase error	
	CC current clamp	
	OC hardware error	Re-apply power and try again. If fault still
	OV hardware error	occurs, please return it to the factory.
808	Auto tuning error	 Check cabling between drive and motor Check the motor capacity and parameters settings Retry again
	PG feedback error	When the setting is in PG feedback control mode, check if the value of Pr.03-00 is not 0.
6434	PG feedback loss	Check the wiring of PG feedback.
PCF3	PG feedback stall	 Check the wiring of the PG feedback Check if the setting of PI gain and
рсрч	PG slip error	deceleration is suitable 3. Return to the factory
[73	External fault	 When external terminal EF is closed (N.O), the AC motor drive will stop output. After fault is cleared, press RESET.

Display	Description	Corrective Actions
. 33	Emergency stop	 When multi-function input terminals MI1~MI5 are set to emergency stop, the AC motor drive will stop output. After fault is cleared, press RESET.
PcodE	Password is locked	 Keypad will be locked after three wrong password inputs. Please refer to the setting in Pr.00-06 and Pr.00-07. Re-apply the power and input the right password.
cE i	Illegal communication code	Check if the communication code is correct (function code must be 03, 06, 10, 63)
535	Illegal data length	Check if the communication data length is correct (00H~254H).
c83	Illegal data value	Check if the data value exceeds its minimum and maximum value.
<u>د43</u>	Illegal communication address	Check if the communication address is correct.
cE 10	Communication time-out It occurs when COM1 communication time-out exceeds Pr.09-03 or when COM2 communication time-out exceeds Pr. 09-07	Check if the wiring for the communication is correct.
cP 10	Keypad (KPV-CE01) communication time-out It occurs when the source command is digital keypad, and COM1 communication time-out exceeds Pr.09-03 and COM2 communication time-out exceeds Pr.09-07	 Check if the wiring for the communication is correct Check if there is any wrong with the keypad

Chapter 6 Fault Codes and Descriptions | DD Series

Display	Description	Corrective Actions
ملاب	Door width auto-tuning error	Check the wiring of the encoder
dob	Open door time-out	Check if door opens fluently.

6.1.1 Reset

There are three methods to reset the AC motor drive after the fault is corrected:

- 1. Press key on KPV-CE01.
- 2. Set external terminal to "RESET" and then set the contact ON.
- 3. Send "RESET" command by communication.

Make sure that RUN command or signal is OFF before executing RESET to prevent damage or personal injury due to immediate operation.

6.2 Maintenance and Inspections

Before the check-up, always turn off the AC input power and remove the cover. Wait at least 10 minutes after all display lamps have gone out, and then confirm that the capacitors have fully discharged by measuring the voltage between DC+ and DC-. The voltage between DC+ and DC-should be less than 25VDC.

Ambient environment

	Mathada and Oritarian		Maintenance		
Check Items			Period		
Check items	Methods and Criterion	Daily	Half	One	
		Daily	Year	Year	
Check the ambient temperature,	Visual inspection and measurement with				
humidity, vibration and see if there	Visual inspection and measurement with equipment with standard specification				
are any dust, gas, oil or water drops	equipment with standard specification				
If there are any dangerous objects	Visual inspection	0			

Voltage

Check Items	Methods and Criterion		Maintenance Period		
Check items	Methods and Chtenon	Daily	Half	One	
		Daily	Year	Year	
Check if the voltage of main circuit	Measure with multimeter with standard	0			
and control circuit is correct	specification				

Keypad

Chask Itoma	Methods and Criterion	Maintenance Period		
Check Items		Daily	Half	One
		,	Year	Year
Is the display clear for reading	Visual inspection	0		
Any missing characters	Visual inspection	0		

Mechanical parts

Chask Home	Mathada and Oritarian	Maintenance Period		
Check Items	Methods and Criterion		Half Year	One Year
If there is any abnormal sound or vibration	Visual and aural inspection		0	

			Maintenance		
Check Items	Methods and Criterion	Period			
Check items		Daily	Half	One	
		Daily	Year	Year	
If there are any loose screws	Tighten the screws		0		
If any part is deformed or damaged	Visual inspection		0		
If there is any color change by	Visual inspection				
overheating			0		
If there is any dust or dirt	Visual inspection		0		

Main circuit

Chask Kome			Maintenance Period		
Check Items	Methods and Criterion	Daily	Half	One	
		Dully	Year	Year	
If there are any loose or missing	Tighten or replace the screw	0			
screws	Tighten or replace the screw				
If machine or insulator is deformed,	Visual inspection				
cracked, damaged or with color	NOTE: Please ignore the color change		0		
change due to overheating or	of copper plate				
ageing	or copper place				
If there is any dust or dirt	Visual inspection		0		

Terminals and wiring of main circuit

			Maintenance		
Check Items	Methods and Criterion	Period			
		Daily	Half	One	
		Daily	Year	Year	
If the terminal or the plate is color					
change or deformation due to Visual inspection			0		
overheat					
If the insulator of wiring is damaged	Visual inspection		0		
or color change)		
If there is any damage	Visual inspection	0			

DC capacity of main circuit

			intenar Period	ntenance Period	
Check Items	Methods and Criterion	Daily	Half	One	
			Year	Year	
If there is any leak of liquid, color	Visual inspection	0			
change, crack or deformation					
If the safety valve is not removed? If	Visual inspection	0			
valve is inflated?		0			
Measure static capacity when		0			
required		0			

Resistor of main circuit

		Ma	Maintenance		
Check Items	Methods and Criterion	Period			
Check items	methods and Chtenon	Daily	Half	One	
		Daily	Year	Year	
If there is any peculiar smell or	Visual inspection, smell	0			
insulator cracks due to overheat					
If there is any disconnection	Visual inspection	0			
	Measure with multimeter with standard				
If connection is damaged?	specification	0			

Transformer and reactor of main circuit

Check Items	Methods and Criterion		intenar Period	
Check items	Methods and Criterion	Daily	One Year	
If there is any abnormal vibration or peculiar smell	Visual, aural inspection and smell	0		

Magnetic contactor and relay of main circuit

Check Items	Methods and Criterion		intenar Period	
Check items	Methods and Criterion	Daily	Half Year	One Year
If there are any loose screws	Visual and aural inspection	0		
If the contact works correctly	Visual inspection	0		

Printed circuit board and connector of main circuit

		Maintenand Period		ice
Check Items	Methods and Criterion		Half	One
		Daily	Year	Year
If there are any loose screws and	Tighten the screws and press the		0	
connectors	connectors firmly in place.		0	
If there is any peculiar smell and color	Visual and smell inspection		0	
change	visual and smell inspection)	
If there is any crack, damage,	Visual inspection		0	
deformation or corrosion	Visual hispection		0	
If there is any liquid is leaked or	Visual inspection		0	
deformation in capacity			0	

Cooling fan of cooling system

		Maintenance		
Check Items	Methods and Criterion	Period Half		One
		Daily	Year	Year
	Visual, aural inspection and turn the fan			
If there is any abnormal sound or	with hand (turn off the power before		0	
vibration	operation) to see if it rotates smoothly			
If there is any loose screw	Tighten the screw		0	
If there is any color change due to	Change for		0	
overheat	Change fan		0	

Ventilation channel of cooling system

Check Items	Methods and Criterion		intenar Period	
Check items	Methods and Criterion	Daily Half Year		One Year
If there is any obstruction in the heat sink, air intake or air outlet	Visual inspection		0	

Please use the neutral cloth for clean and use dust cleaner to remove dust when necessary.

Appendix A Specifications

VDD-DD series provide our customers 230V-200W model and 230V-400W model, choose the one that fits your need. The table below facilitates our customers' purchase.

Drive Specifications

Model VFDDD 002 004		004	
Appl	cable Motor Output(W)	200	400
	Rated Output Capacity (kVA)	0.6	1.0
Rating	Rated Output Current (A)	1.5	2.5
ut Rai	Maximum Output Voltage (V)	Proportional t	o Input Voltage
Holtage (V) Output Frequency (Hz) Output Frequency		0.00~120.00Hz	
O Carrier Frequency (kHz)		10 k	Hz
	Rated Input Current (A)	4.9A	6.5A
Input	Voltage Tolerance	Single phase 200~ 240V	(-20%~+10%) (160~264V)
The second sec		50/60Hz ±5% (47~63Hz)	
	Cooling Method	200W natural cool /400W natural cool	
Frame Size W170mm*L215*H55mm			_215*H55mm

Common Characteristics

	Control Me	ethod	1: V/F, 2: VF+PG, 3: SVC, 4: FOC+PG, 6:PM FOC+PG	
	Starting Torque		Starting torque at 0.5Hz is more than 150%, at 0 Hz is FOC+PG	
S			control mode	
<u>ii</u>	Speed Cont	trol Range	1:100(external PG installation can achieve 1:1000)	
LIS	Speed Cont	trol Accuracy	$\pm 0.5\%$ (external PG installation can achieve $\pm 0.02\%$)	
te	Speed Resp	oonse Ability	5Hz (vector control can attain 30Hz)	
ğ	Max. Outpu	t Frequency (Hz)	0.00 to 120.00 Hz	
ha	Output Free	quency Accuracy	Digital command ±0.005%	
Control Characteristics	Frequency Resolution	Setting	Digital command ±0.01Hz	
ont	Torque Limi	t	200% torque current as maximum	
Ŭ	Accel/Decel Time		0.00~600.00 sec	
	V/F Curve Pattern		Adjustable V/F curve of 4 independent points	
	Brake Torque		50% ED for 3 seconds, during every 30 seconds (optional)	
	Frequency	Keypad	By parameter setting	
S	Setting	External Signal	Multi-function input selection 1~5 (15 step speeds; At low speed),	
stic	Signal		parameter setting on serial communication port (RS-485)	
eri	Operation	Keypad	Set by RUN, STOP key	
Characteristics	Setting Signal	External Signal	2 wires (OD, CD, RUN), At low speed operation, RS-485 serial interface, demo mode	
Operating Ch	Multi-Function Input Signal		Multi-step speed selection MI1~MI15, At low speed, first to second accel/decel switches, demo mode, force stop, emergency stop, operation command source, parameter lock, driver reset, open/close limit signal, door open prohibited signal, force open signal, reposition, 2nd step open/close curve selection	


	Multi-Function Output Signal	(RC1,RA1,RB1), (RC2,RA2,RB2), (MO1,MO2,MO3 and MCM) AC drive operating, frequency attained, fault indication, over torque, over voltage, operation mode, alarm indication, demo mode indication, overheat alarm, drive is ready, emergency stop, braking signal, zero speed indication, PG indication error, position detection, limit signal, re-open/close indication, position finished	
Com	munication Interface	Built-in MODBUS, customize CAN Bus	
Alarm	n Output Contact	Contact "ON" when malfunctions occurs (relay with a "C" or "A" contact, or 2 open collector outputs)	
Operation Function		AVR, 6 set fault records, opening door is prohited, DC brake, auto torque/slip compensation, auto tuning, adjustable carrier frequency, output frequency upper and lower limits, parameter reset, vector control, MODBUS communication, abnormal reset, abnormal re-start, PG feedback control, fan control, demo mode, door width auto-tuning	
Protection Function		Over voltage, over current, under current, external fault, overload, ground fault, overload, overheating, electronic thermal, PG feedback error, external limit signal error, re-open/re-close	
Digital Keypad		7 function keys, 4-digit 7-segment LED, 4 status LEDs, master frequency, output frequency, output current, custom units, parameter values for setup, review and faults, RUN, STOP, RESET, FWD/REV	
EMI Filter built in		Corresponding to EN55011 CLASS A (economy versions are not included)	
	Motor Protection	Electronic thermal relay protection	
on stics	Over Current Protection	The current forces 220% of the over-current protection and 300% of the rated current	
eri Gi	Overload Capacity	150% for 60 seconds; 180% for 10 seconds	
Protection laracteristi	Voltage Protection	Over-voltage level: Vdc>400; low-voltage level: Vdc<200	
Protection Characteristics	Over-voltage Protection for Input Power	Varistor (MOV)	
	Overheat Protection	Built-in temperature sensor	
	Enclosure Rating	IP20	
int	Operation Temperature	-10°C~40°C	
me	Ambient Temperature	-20° C ~60° C	
Environment	Ambient Humidity	Below 90% RH (non-condensing)	
l vir	Vibration	1.0G less than 20Hz, 0.6G at 20~60 Hz	
Ш	Installation Location	Altitude 1,000m or lower, keep from corrosive gasses, liquid and dust	
Appro	oval	UL(2011Q2), C E (IEC 61800-3)	

Motor Specifications

1000000000000000000000000000000000000	Maximum speed: 240 RPM;	Poles number: 8 pairs (16 poles)
---------------------------------------	-------------------------	----------------------------------

	Frame	ECMD-B9120GMS	ECMD-B9160GMS
S	Rated Output Power (W)	70	65
d tion	Rated Voltage (V)	70	65
Rated	Rated Torque (N-m)	220	220
Rated	Rated Speed (rpm)	1.9	2.5
ত	Rated Current (A)	350	250
	Continuous Stall Torque (N-m)	0.78	0.97
	Maximum Momentary Torque(N-m)	1.9	2.5
	Maximum Speed (rpm)	3.0	3.0
	Maximum Momentary Current (A)	750	300
	Incitation Voltage Constant (mV/rpm)		3.8
su	Constant Torque (N.m/A)	99	100.8
atio	Rotor Moment of Inertia (kg.m2)	2.26	2.5
lifice	Armature Resistance (Ohm)	3.0*10 ⁻⁴	4.93*10 ⁻⁴
bed	Armature Inductance (mH)	17.9	13.3
Motor Specifications	Mechanical Time Constant (ms)	200	161
Mot	Electrical Time Constant (ms)	2.36	2.65
	Insulation Class	11.2	12.1
	Insulation Resistance	В	В
	Insulation Strength	10MΩDC500V	10MΩDC500V
	Max. Radial Shaft Load (N)	1.5kVAC, 1min.	1.5kVAC, 1min.
	Max. Thrust Shaft Load (N)	98	98
	Weight (kg)	49	49
	Maximum Winding Temperature	130	٥°C
Environment Specifications	Operating Temperature	5~4	5 °C
catio	Storage Temperature	-10~	50 ℃
viro scifie	Operating Humidity (%RH)	20~95%RH(nc	n-condensing)
Spe	Storage Humidity(%RH)	20~95%RH(nc	on-condensing)
	IP Rating	IP20 (Standard)	; IP40 (optional)

Motor Model

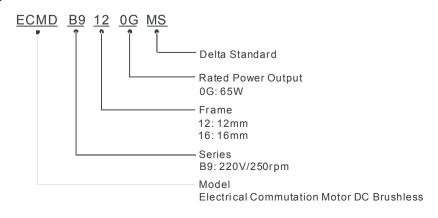

Appendix B How to Select AC Motor Drive

The choice of the right AC motor drive for the application is very important and has great influence on its lifetime. If the capacity of AC motor drive is too large, it cannot offer complete protection to the motor and motor maybe damaged. If the capacity of AC motor drive is too small, it cannot offer the required performance and the AC motor drive maybe damaged due to overloading.

But by simply selecting the AC motor drive of the same capacity as the motor, user application requirements cannot be met completely. Therefore, a designer should consider all the conditions, including load type, load speed, load characteristic, operation method, rated output, rated speed, power and the change of load capacity. The following table lists the factors you need to consider, depending on your requirements.

Item		Related Specification			
		Speed and torque characteristics	Time ratings	Overload capacity	Starting torque
Load type	Friction load and weight load Liquid (viscous) load Inertia load Load with power transmission	•			•
Load speed and torque characteristics	Constant torque Constant output Decreasing torque Decreasing output	•	•		
Load characteristics	Constant load Shock load Repetitive load High starting torque Low starting torque	•	•	●	•
Operation Method	Continuous operation, Short-time operation Long-time operation at medium/low speeds		•	●	
Rated Output	Maximum output current (instantaneous) Constant output current (continuous)	•		•	
Rated Speed	Maximum frequency, Base frequency	●			
Input Power	Power supply transformer capacity Percentage impedance Voltage fluctuations and unbalance Number of phases, single phase protection Frequency			•	•
Load Capacity Changes	Mechanical friction, losses in wiring Duty cycle modification				

B-1 Capacity Formulas

1. When one AC motor drive operates one motor

The starting capacity should be less than 1.5x rated capacity of AC motor drive The starting capacity=

 $\frac{k \times N}{973 \times \eta \times \cos \varphi} \left(T_L + \frac{GD^2}{375} \times \frac{N}{t_A} \right) \leq 1.5 \times the _capacity_of_AC_motor_drive(kVA)$

2. When one AC motor drive operates more than one motor

- 2.1 The starting capacity should be less than the rated capacity of AC motor drive
 - Acceleration time ≤ 60 seconds

The starting capacity=

 $\frac{k \times N}{\eta \times \cos \varphi} \left[n_{\tau} + n_{s} \left(k_{s-1} \right) \right] = P_{C1} \left[1 + \frac{n_{s}}{n_{\tau}} \left(k_{s-1} \right) \right] \leq 1.5 \times the _capacity_of_AC_motor_drive(kVA)$

• Acceleration time \geq 60 seconds

The starting capacity=

$$\frac{k \times N}{\eta \times \cos \varphi} [n_{\tau} + n_{s}(k_{s-1})] = P_{C1} \left[1 + \frac{n_{s}}{n_{\tau}}(k_{s-1}) \right] \leq the _capacity_of_AC_motor_drive(kVA)$$

2.2 The current should be less than the rated current of AC motor drive(A)

• Acceleration time \leq 60 seconds

$$n_{\tau} + I_{M} \Big[1 + \frac{n_{s}}{n_{\tau}} (k_{s}-1) \Big] \leq 1.5 \times the _rated _current_of _AC_motor_drive(A)$$

• Acceleration time \geq 60 seconds

$$n_{\tau} + I_{M} \left[1 + \frac{n_{s}}{n_{\tau}} (k_{s} - 1) \right] \leq the _rated _current_of_AC_motor_drive(A)$$

- 2.3 When it is running continuously
 - The requirement of load capacity should be less than the capacity of AC motor drive(kVA) The requirement of load capacity=

$$\frac{k \times P_M}{\eta \times \cos \varphi} \le the _capacity_of_AC_motor_drive(kVA)$$

The motor capacity should be less than the capacity of AC motor drive

 $k \times \sqrt{3} \times V_M \times I_M \times 10^{-3} \le the _capacity_of _AC_motor_drive(kVA)$

The current should be less than the rated current of AC motor drive(A)

 $k \times I_{M} \leq the_rated_current_of_AC_motor_drive(A)$

Symbol explanation

- Р_м: Motor shaft output for load (kW)
- η : Motor efficiency (normally, approx. 0.85)
- $\cos \phi$: Motor power factor (normally, approx. 0.75)
- V_M : Motor rated voltage(V)
- I_M : Motor rated current(A), for commercial power
- k : Correction factor calculated from current distortion factor (1.05 1.1, depending on PWM method)
- P_{c1} : Continuous motor capacity (kVA)
- k s : Starting current/rated current of motor
- n_{T} : Number of motors in parallel
- n s : Number of simultaneously started motors
- GD² : Total inertia (GD²) calculated back to motor shaft (kg m²)
- $T_{\mathsf{L}}_{}$: Load torque
- t A : Motor acceleration time
- N : Motor speed

B-2 General Precautions

Drives Selection

- When the AC Motor Drive is connected directly to a large-capacity power transformer (600kVA or above) or when a phase lead capacitor is switched, excess peak currents may occur in the power input circuit and the converter section may be damaged. To avoid this, use an AC input reactor (optional) before AC Motor Drive mains input to reduce the current and improve the input power efficiency.
- When a special motor is used or more than one motor is driven in parallel with a single AC Motor Drive, select the AC Motor Drive current ≥1.25x(Sum of the motor rated currents).
- 3. The starting and accel./decel. characteristics of a motor are limited by the rated current and the overload protection of the AC Motor Drive. Compared to running the motor D.O.L. (Direct On-Line), a lower starting torque output with AC Motor Drive can be expected. If higher starting torque is required (such as for elevators, mixers, tooling machines, etc.) use an AC Motor Drive of higher capacity or increase the capacities for both the motor and the AC Motor Drive.
- 4. When an error occurs on the drive, a protective circuit will be activated and the AC Motor Drive output is turned off. Then the motor will coast to stop. For an emergency stop, an external mechanical brake is needed to quickly stop the motor.

Parameter Settings


- The AC Motor Drive can be driven at an output frequency up to 400Hz (less for some models) with the digital keypad. Setting errors may create a dangerous situation. For safety, the use of the upper limit frequency function is strongly recommended.
- 2. High DC brake operating voltages and long operation time (at low frequencies) may cause overheating of the motor. In that case, forced external motor cooling is recommended.
- 3. Motor accel./decel. time is determined by motor rated torque, load torque, and load inertia.
- 4. If the stall prevention function is activated, the accel./decel. time is automatically extended to a length that the AC Motor Drive can handle. If the motor needs to decelerate within a certain time with high load inertia that can't be handled by the AC Motor Drive in the required time, either use an external brake resistor and/or brake unit, depending on the model, (to shorten deceleration time only) or increase the capacity for both the motor and the AC Motor Drive.

B-3 How to Choose a Suitable Motor

Standard motor

When using the AC Motor Drive to operate a standard 3-phase induction motor, take the following precautions:

- 1. The energy loss is greater than for an inverter duty motor.
- 2. Avoid running motor at low speed for a long time. Under this condition, the motor temperature may rise above the motor rating due to limited airflow produced by the motor's fan. Consider external forced motor cooling.
- 3. When the standard motor operates at low speed for long time, the output load must be decreased.
- 4. The load tolerance of a standard motor is as follows:



- 5. If 100% continuous torque is required at low speed, it may be necessary to use a special inverter duty motor.
- 6. Motor dynamic balance and rotor endurance should be considered once the operating speed exceeds the rated speed (60Hz) of a standard motor.
- 7. Motor torque characteristics vary when an AC Motor Drive instead of commercial power supply drives the motor. Check the load torque characteristics of the machine to be connected.
- 8. Because of the high carrier frequency PWM control of the VFD series, pay attention to the following motor vibration problems:
 - Resonant mechanical vibration: anti-vibration (damping) rubbers should be used to mount equipment that runs at varying speed.
 - Motor imbalance: special care is required for operation at 50 or 60 Hz and higher frequency.
 - To avoid resonances, use the Skip frequencies.
- 9. The motor fan will be very noisy when the motor speed exceeds 50 or 60Hz.

Special motors:

1. Pole-changing (Dahlander) motor:

The rated current is differs from that of a standard motor. Please check before operation and select the capacity of the AC motor drive carefully. When changing the pole number the motor needs to be stopped first. If over current occurs during operation or regenerative voltage is too high, please let the motor free run to stop (coast).

2. Submersible motor:

The rated current is higher than that of a standard motor. Please check before operation and choose the capacity of the AC motor drive carefully. With long motor cable between AC motor drive and motor, available motor torque is reduced.

3. Explosion-proof (Ex) motor:

Needs to be installed in a safe place and the wiring should comply with the (Ex) requirements. Delta AC Motor Drives are not suitable for (Ex) areas with special precautions.

4. Gear reduction motor:

The lubricating method of reduction gearbox and speed range for continuous operation will be different and depending on brand. The lubricating function for operating long time at low speed and for high-speed operation needs to be considered carefully.

5. Synchronous motor:

The rated current and starting current are higher than for standard motors. Please check before operation and choose the capacity of the AC motor drive carefully. When the AC motor drive operates more than one motor, please pay attention to starting and changing the motor.


Power Transmission Mechanism


Pay attention to reduced lubrication when operating gear reduction motors, gearboxes, belts and chains, etc. over longer periods at low speeds. At high speeds of 50/60Hz and above, lifetime reducing noises and vibrations may occur.

Motor torque

The torque characteristics of a motor operated by an AC motor drive and commercial mains power are different.

Below you'll find the torque-speed characteristics of a standard motor (4-pole, 15kW):

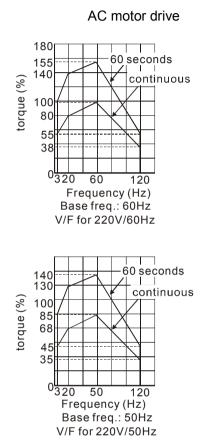

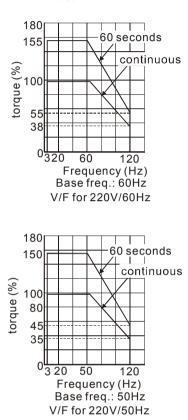

Motor